
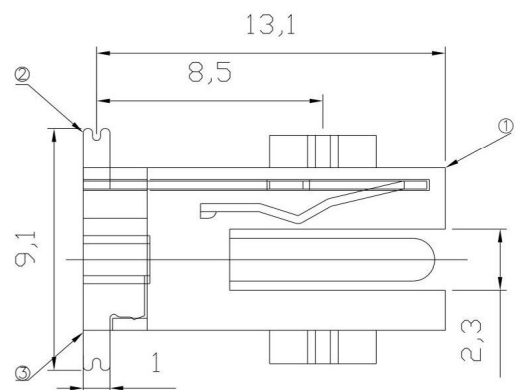
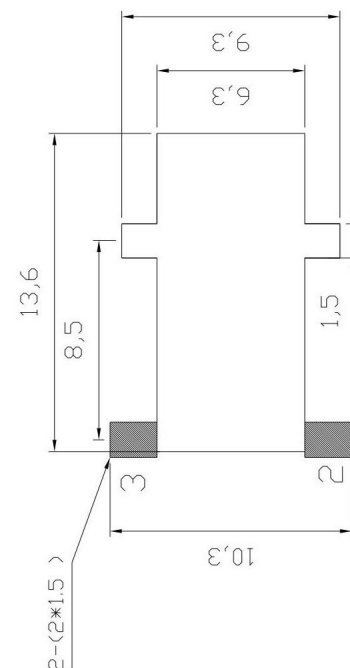
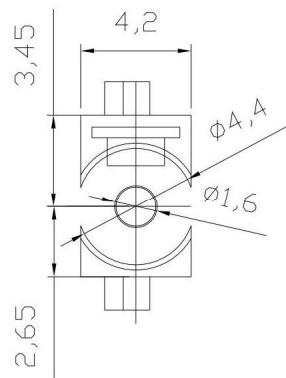


CENTRE PIN :COPPER(Ni Plated)
 TERMINAL 1 :BRASS(Matte Tin Plated)
 TERMINAL 2 :PHOSPHOR BRONZE(Matte Tin Plated)
 TERMINAL 3 :BRASS(Matte Tin Plated)
 HOUSING :PA66

1. Rating : DC 16V 2.5A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. life test : 5,000 cycles

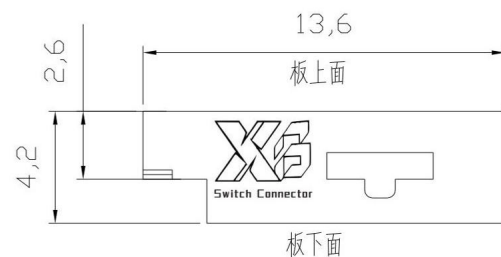

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	±0.2
	Above 5 ~ 15	±0.3
	Above 15 ~ 30	±0.4
	Above 30 ~ 50	±0.5
	Angle	±0.3°

3RD.
ANGELUS



UNITS

MM

DRAWN BY:	DATE
Jack Lu	06/08/15
CHECKED BY:	DATE
Jacky Chen	06/08/15
APPROVED BY:	DATE
Tony Kao	06/08/15

DATE _____

06/08/15

DATE _____

06/08/15

DATE _____

--	--

MAX E

FINISH

SCALE

--	--

TITLE

MODLE

DIAGRAM

JACK

DC JACK

b. XB-DC-064

SIZE
A4
VER
R