
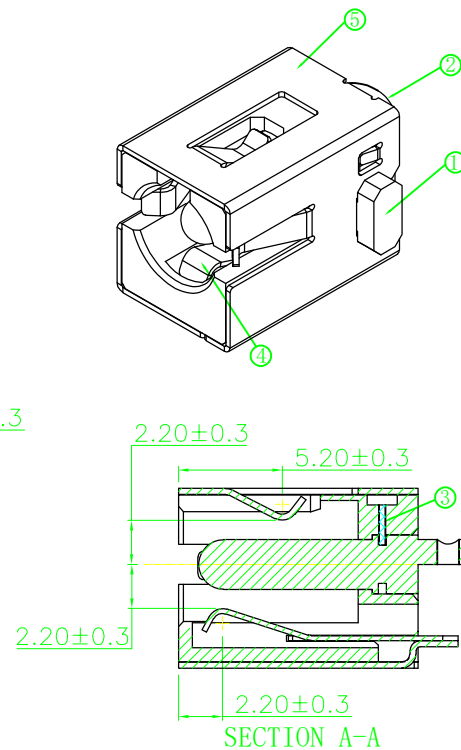
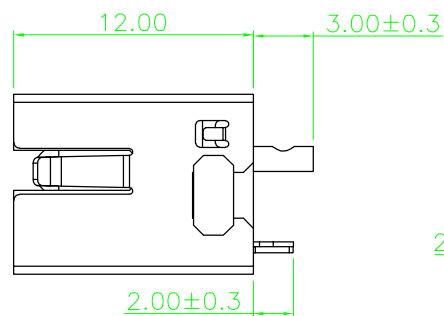
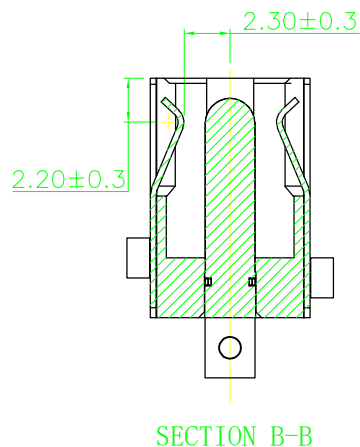
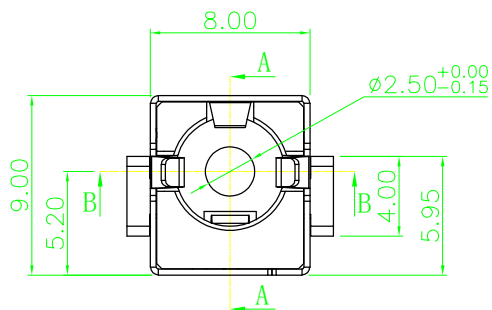



SCHEMATIC




SPECIFICATION


1. Rating : DC 20V 10A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 5-40N;
6. life test: 5,000 cycles.

5	SHELL	1	SUS301 0.3t	Ni40U"
4	SPRING PIECE	1	BRONZE C5210 0.25t	Sn60U" OVER Ni20U"
3	STOPPER	1	SUS301 0.3t	
2	PIN	1	ZINC ALLOY	Sn100U" OVER Cu400U"
1	HOUSING	1	LCP	BLACK
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNLESS OTHERWISE SPECIFIED TOLERANCES			XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DECIMALS:		ANGLES:	DESIGN:	Tony
DIM	TOL	DIM	TOL	2018.7.23
X.	±0.50	X.	±2°	CHECK:
X.X	±0.30	X.X	±1°	
X.XX	±0.20	X.XX	—	APPROVED
X.XXX	±0.10	X.XXX	—	
3RD ANGLE PROJECTION		UNIT:	mm	Andy-liu
				2018.7.23
			PART NAME:	
			Φ5.5 焊线式 DC POWER JACK	
			PART NO.	
			XB-DC550250-0031-60000H	
			SHEET: 1/1	REV.: A
			DRAWING NO	



REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

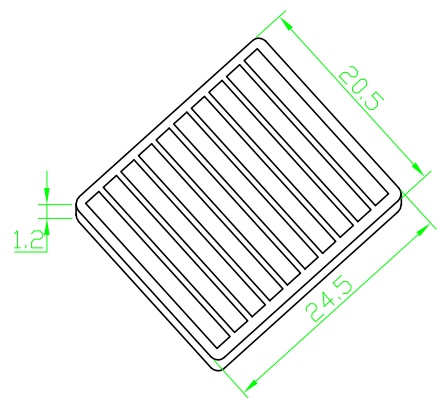

吸塑盒

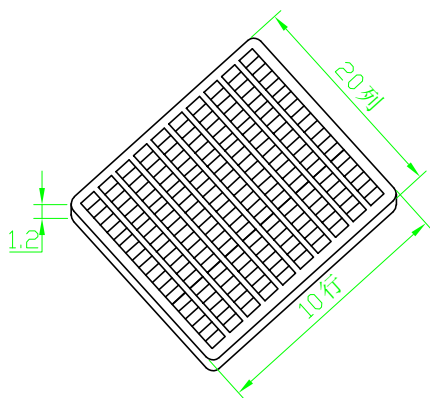

吸塑盒 (200pcs)

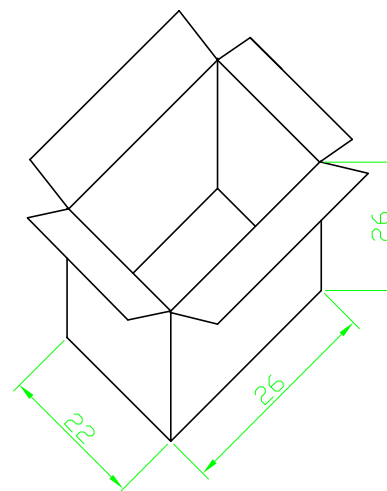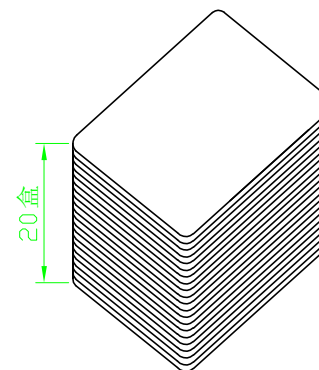

纸箱 (20X200=4000pcs)

单位: cm

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2018.7.23	Φ5.5 焊线式	
X.	±0.50	X.	±2°	CHECK:		DC POWER JACK-包装图	
X.X	±0.30	X.X	±1°			PART NO.	
X.XX	±0.20	X.XX				XB-DC550250-0031-60000H	
X.XXX	±0.10	X.XXX				SHEET: 1/1 REV.: A	
3RD ANGLE PROJECTION				UNIT: mm	APPROVED	Andy-liu	DRAWING NO
					2018.7.23	1	