



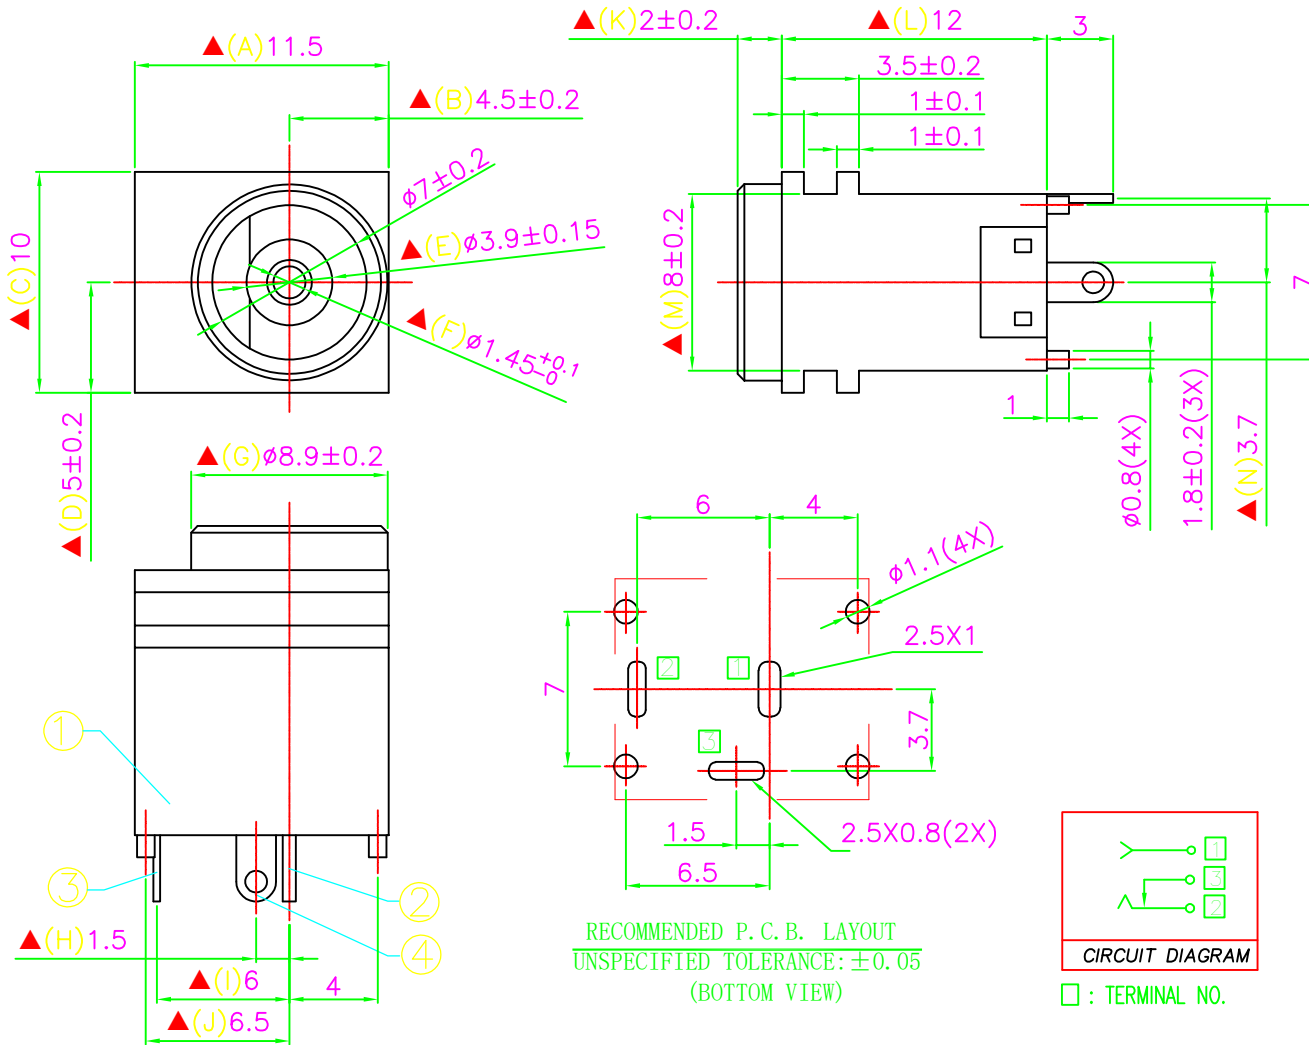


RECOMMENDED P. C. B. LAYOUT
UNSPECIFIED TOLERANCE: ± 0.05
(BOTTOM VIEW)



□ : TERMINAL NO.

- SPECIFICATION
- Rating: DC 30V 5A.
 - Contact resistance: $\leq 30m\Omega$.
After test: $\leq 50m\Omega$.
 - Insulation resistance: $\geq 100M\Omega$; (DC500V).
After test: $\geq 50M\Omega$.
 - Withstanding voltage: 500VAC.
 - Insertion and extraction force: 3-30N.
 - Life test 5000 cycles.
 - Operation temperature range: $-20^{\circ}C \sim 70^{\circ}C$.
 - Preservative temperature range: $-40^{\circ}C \sim 85^{\circ}C$.
 - Sign "▲" is importance dimension.





④	Shunt terminal	1	黄铜H62 t0.4	Silver plating
③	Tip spring	1	C5210 t0.3	Silver plating
②	Center pin	1	黄铜H62 t0.6	Silver plating
①	Housing	1	PBT	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

UNLESS OTHERWISE
SPECIFIED TOLERANCES


XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	Tony	PART NAME:
DIM	TOL	DIM	TOL	2019.4.9
X.	± 0.50	X.	$\pm 2^{\circ}$	Φ6.50X1.40 卧式 DC POWER JACK
X.X	± 0.30	X.X	$\pm 1^{\circ}$	PART NO.
X.XX	± 0.20	X.XX		XB-DC650140-0221-20000H
X.XXX	± 0.10	X.XXX		SHEET: 1/1 REV.: A1
3RD ANGLE PROJECTION	UNIT: mm	APPROVED	Andy	DRAWING NO
			2019.4.9	


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

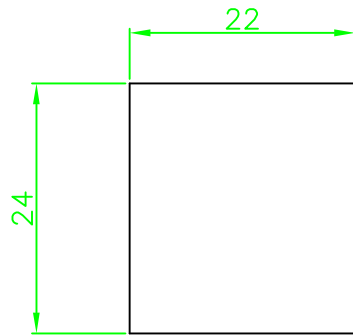

PE袋 (500pcs)

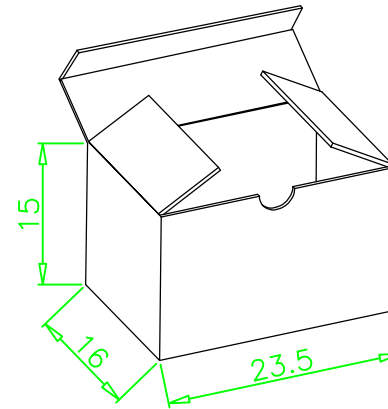


内箱 (4x500=2000pcs)

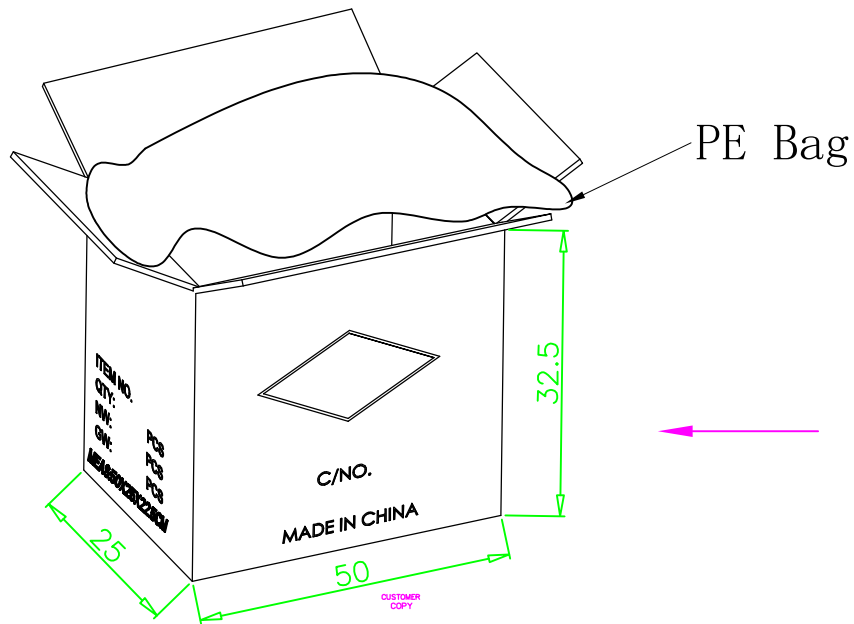

Angle ±2°
X ±0.30
.X ±0.25
.XX ±0.20

外箱 (6x2000=12,000pcs)

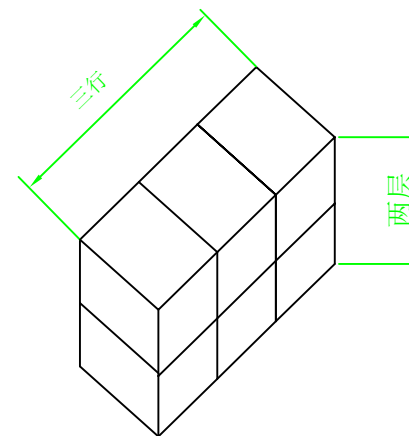

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL	CHECK:	2019.4.9	Φ6.50X1.40 卧式 DC POWER JACK—包装图	
X.	±0.50	X.	±2°		APPROVED	Andy	PART NO.
X.X	±0.30	X.X	±1°				XB-DC650140-0221-20000H
X.XX	±0.20	X.XX	—				SHEET: 1/1 REV.: A1
X.XXX	±0.10	X.XXX	—	DRAWING NO			
		UNIT: mm					

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------