

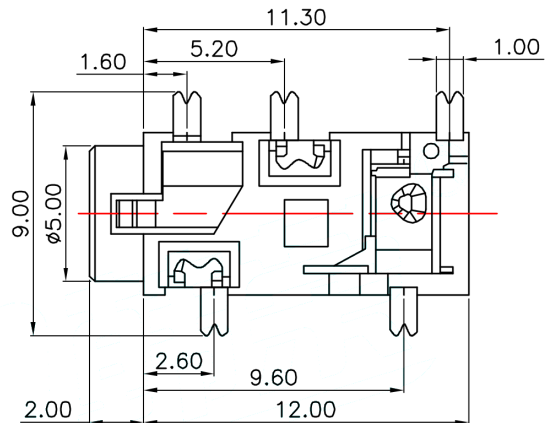


CAD FILE:



P.C.B Layout (copper-sided view)

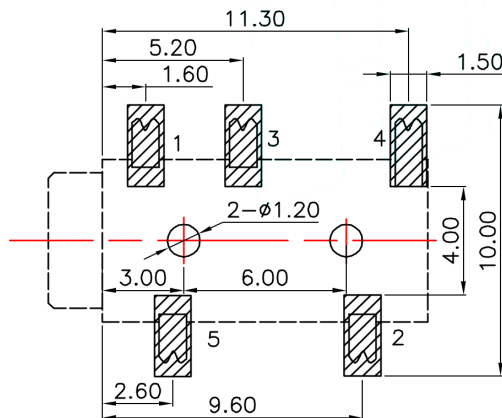

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-40℃~+80℃
Operating force:3-20N
Operating Life:5,000cycles

Model NO	PJ-327A-A	PJ-327A-B
Schematic		
PJ-327A-C	PJ-327A-D	PJ-327A-E

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Audio Jack			UNIT : mm	DRWG NO.: XB-PJ-327A-SMT
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					