

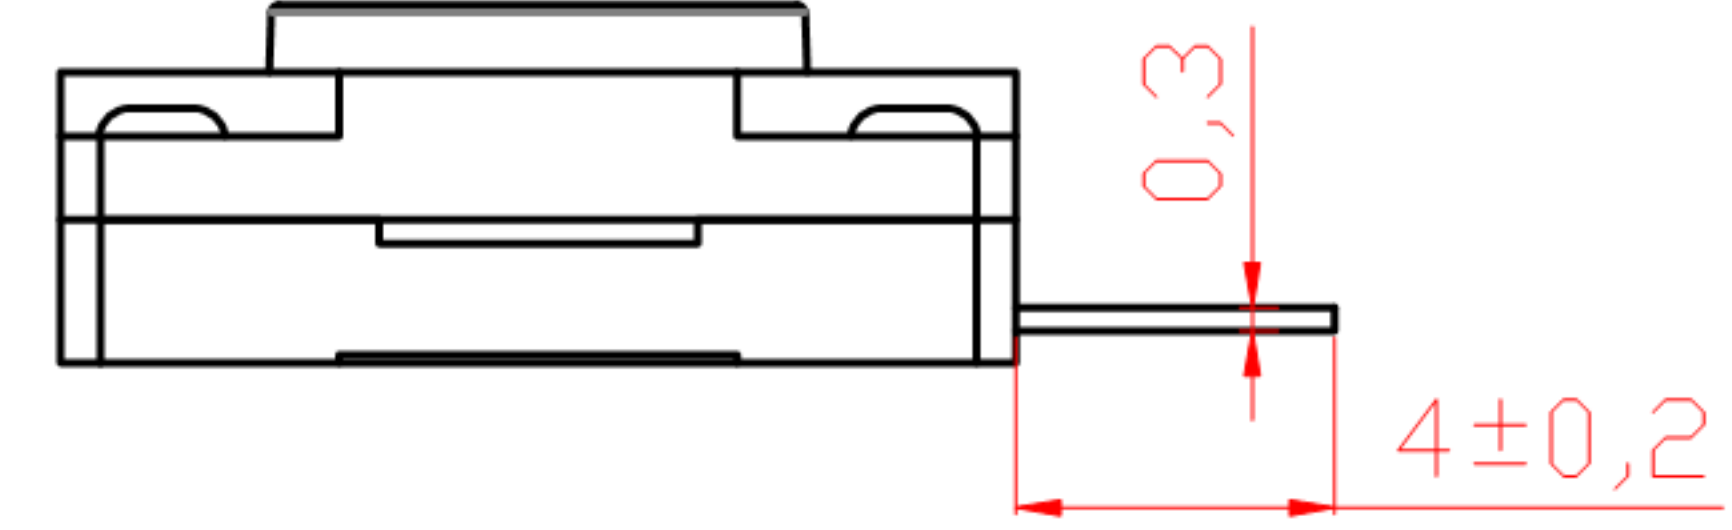
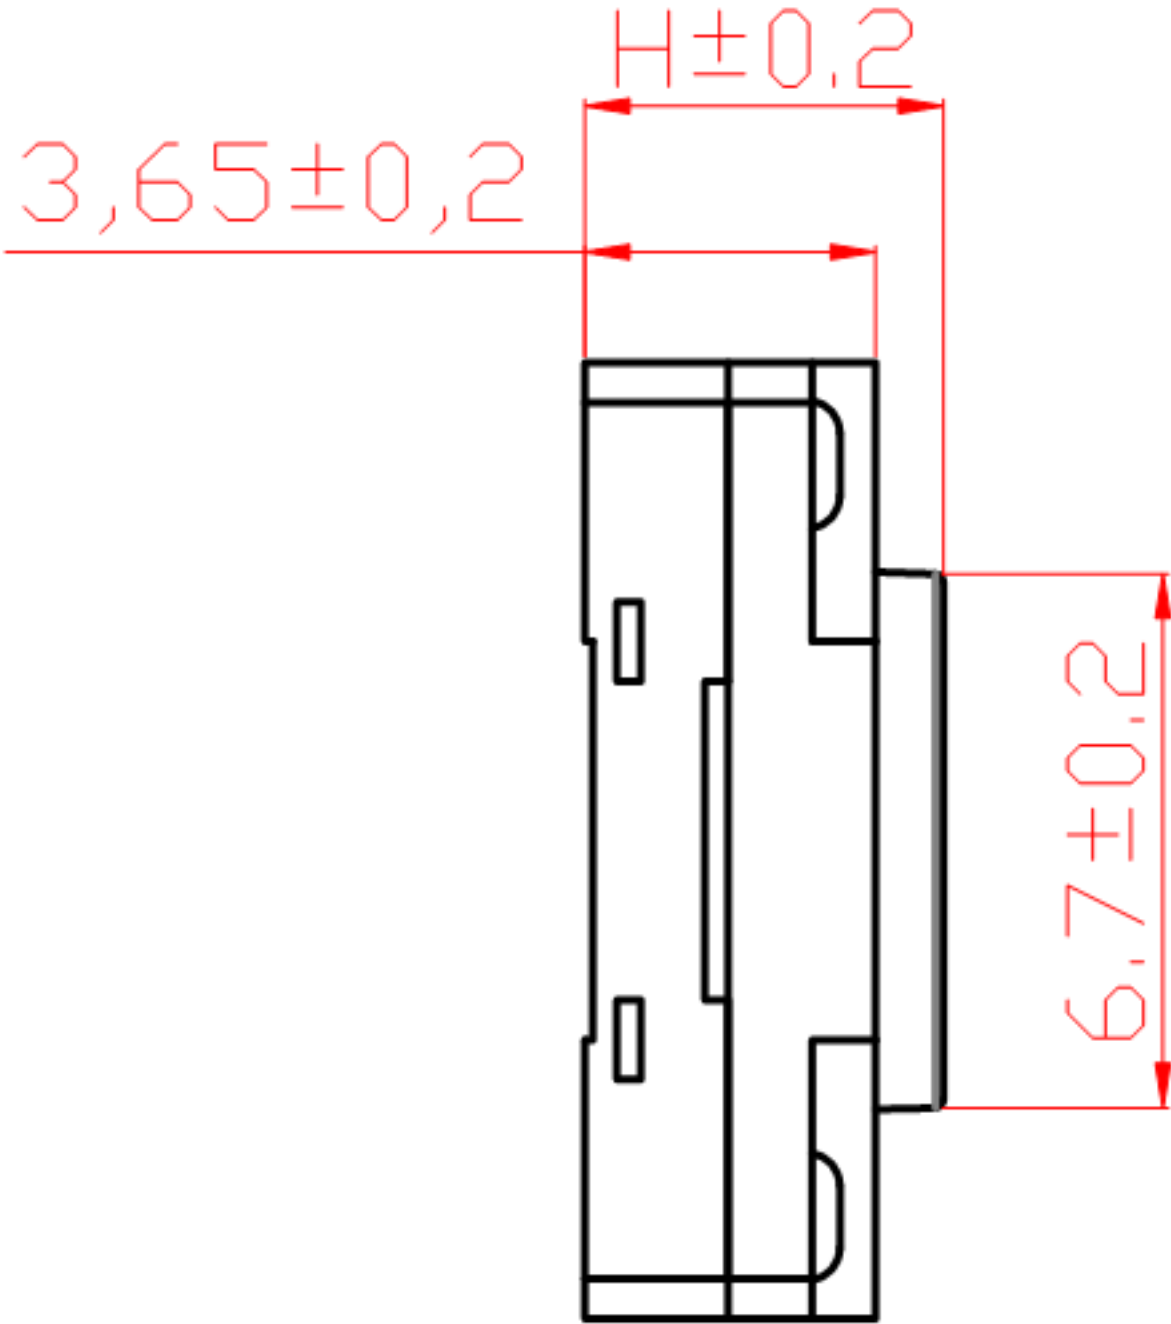
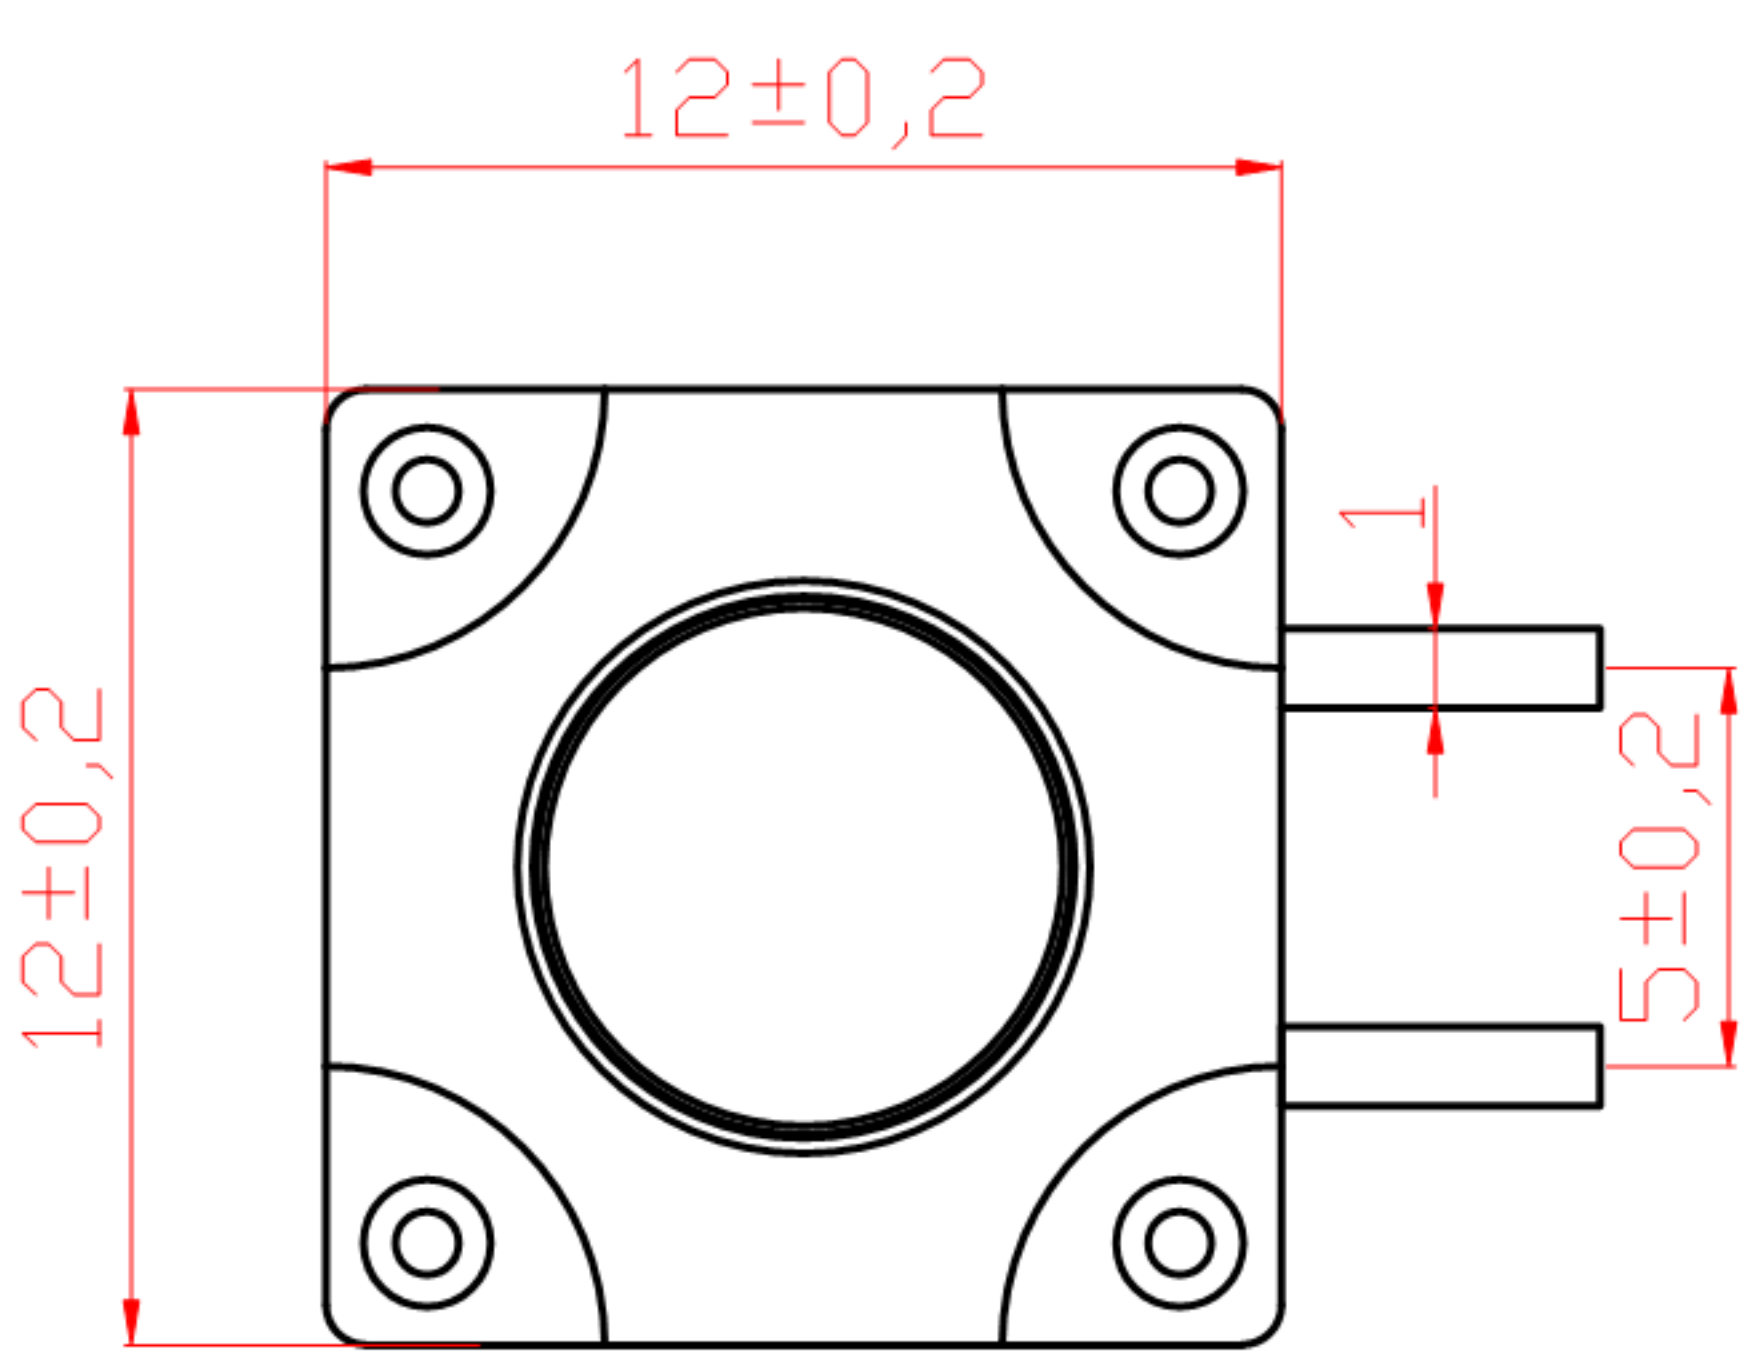
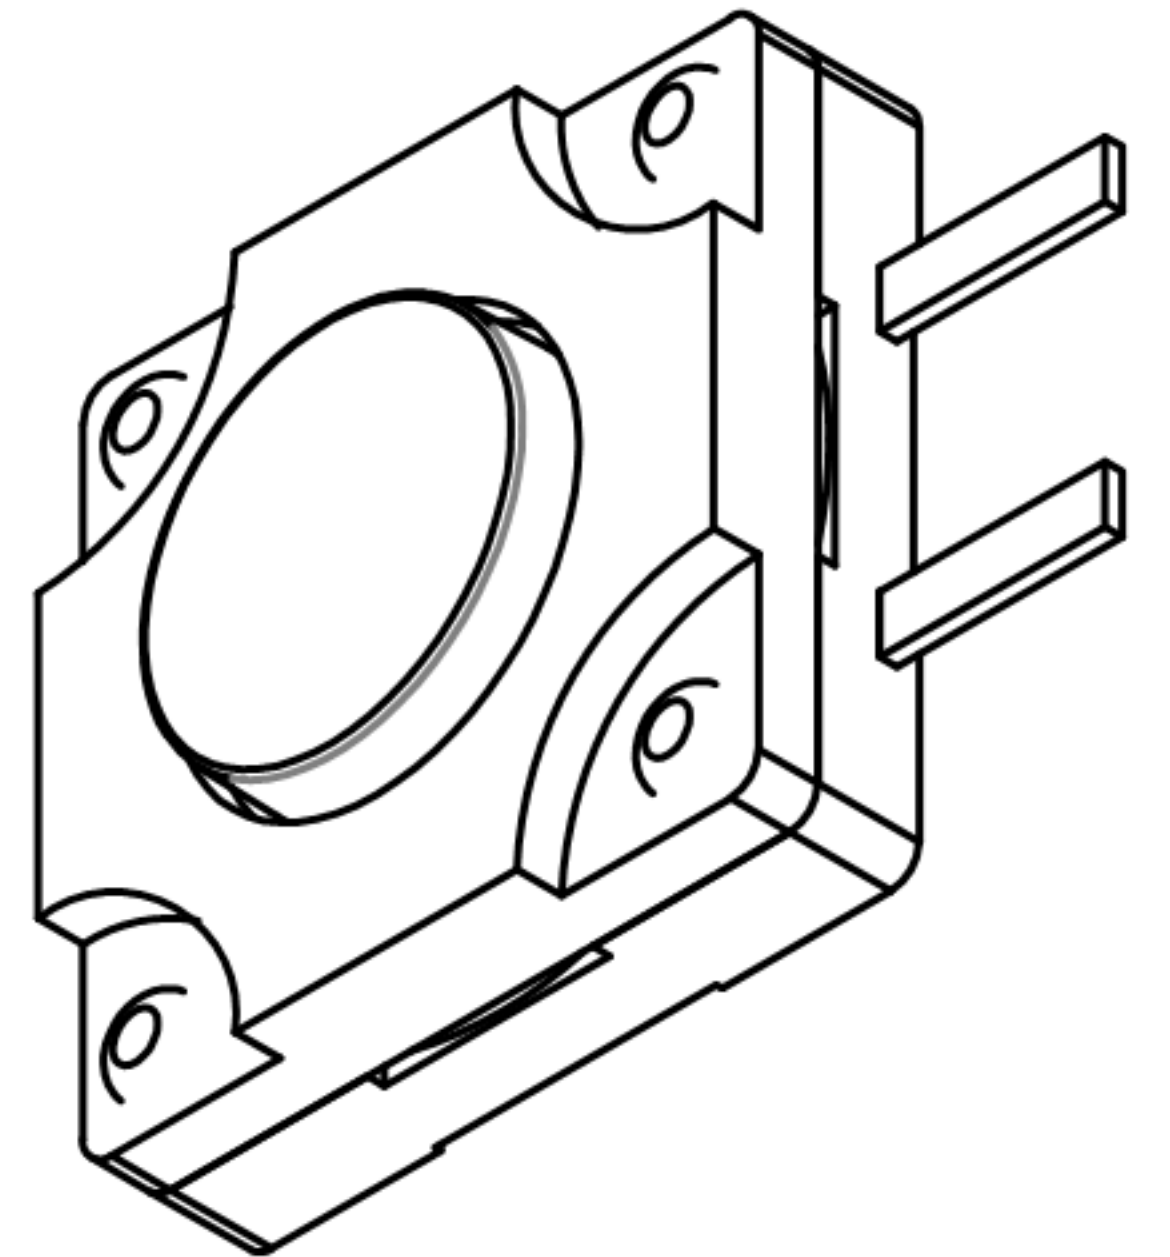


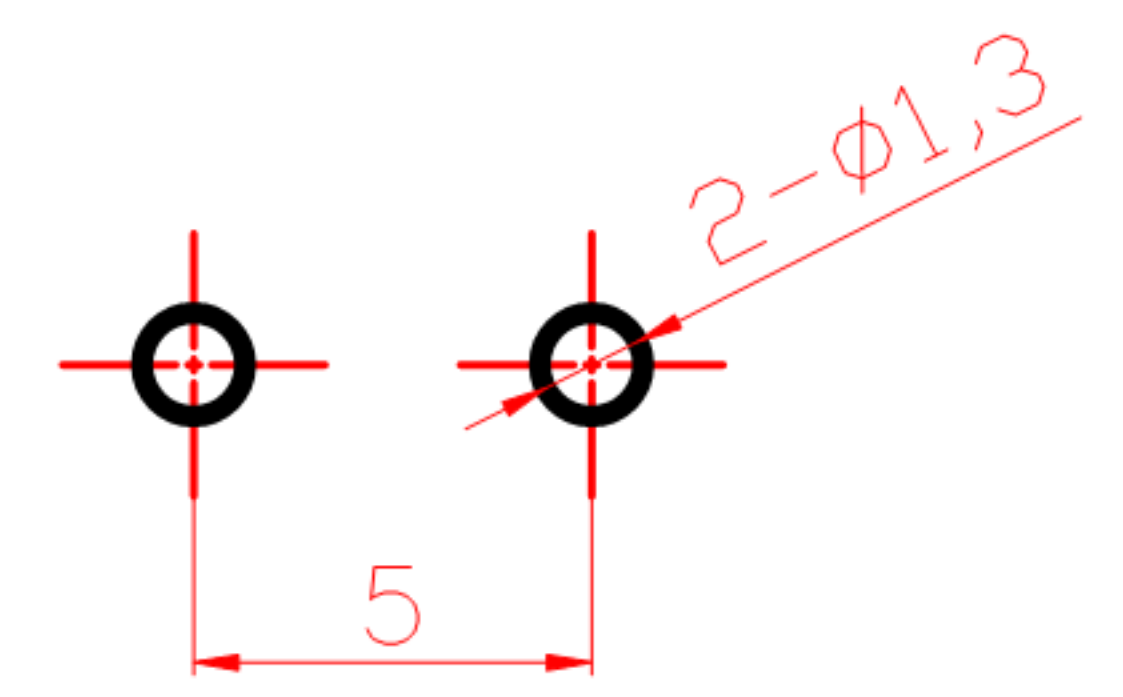

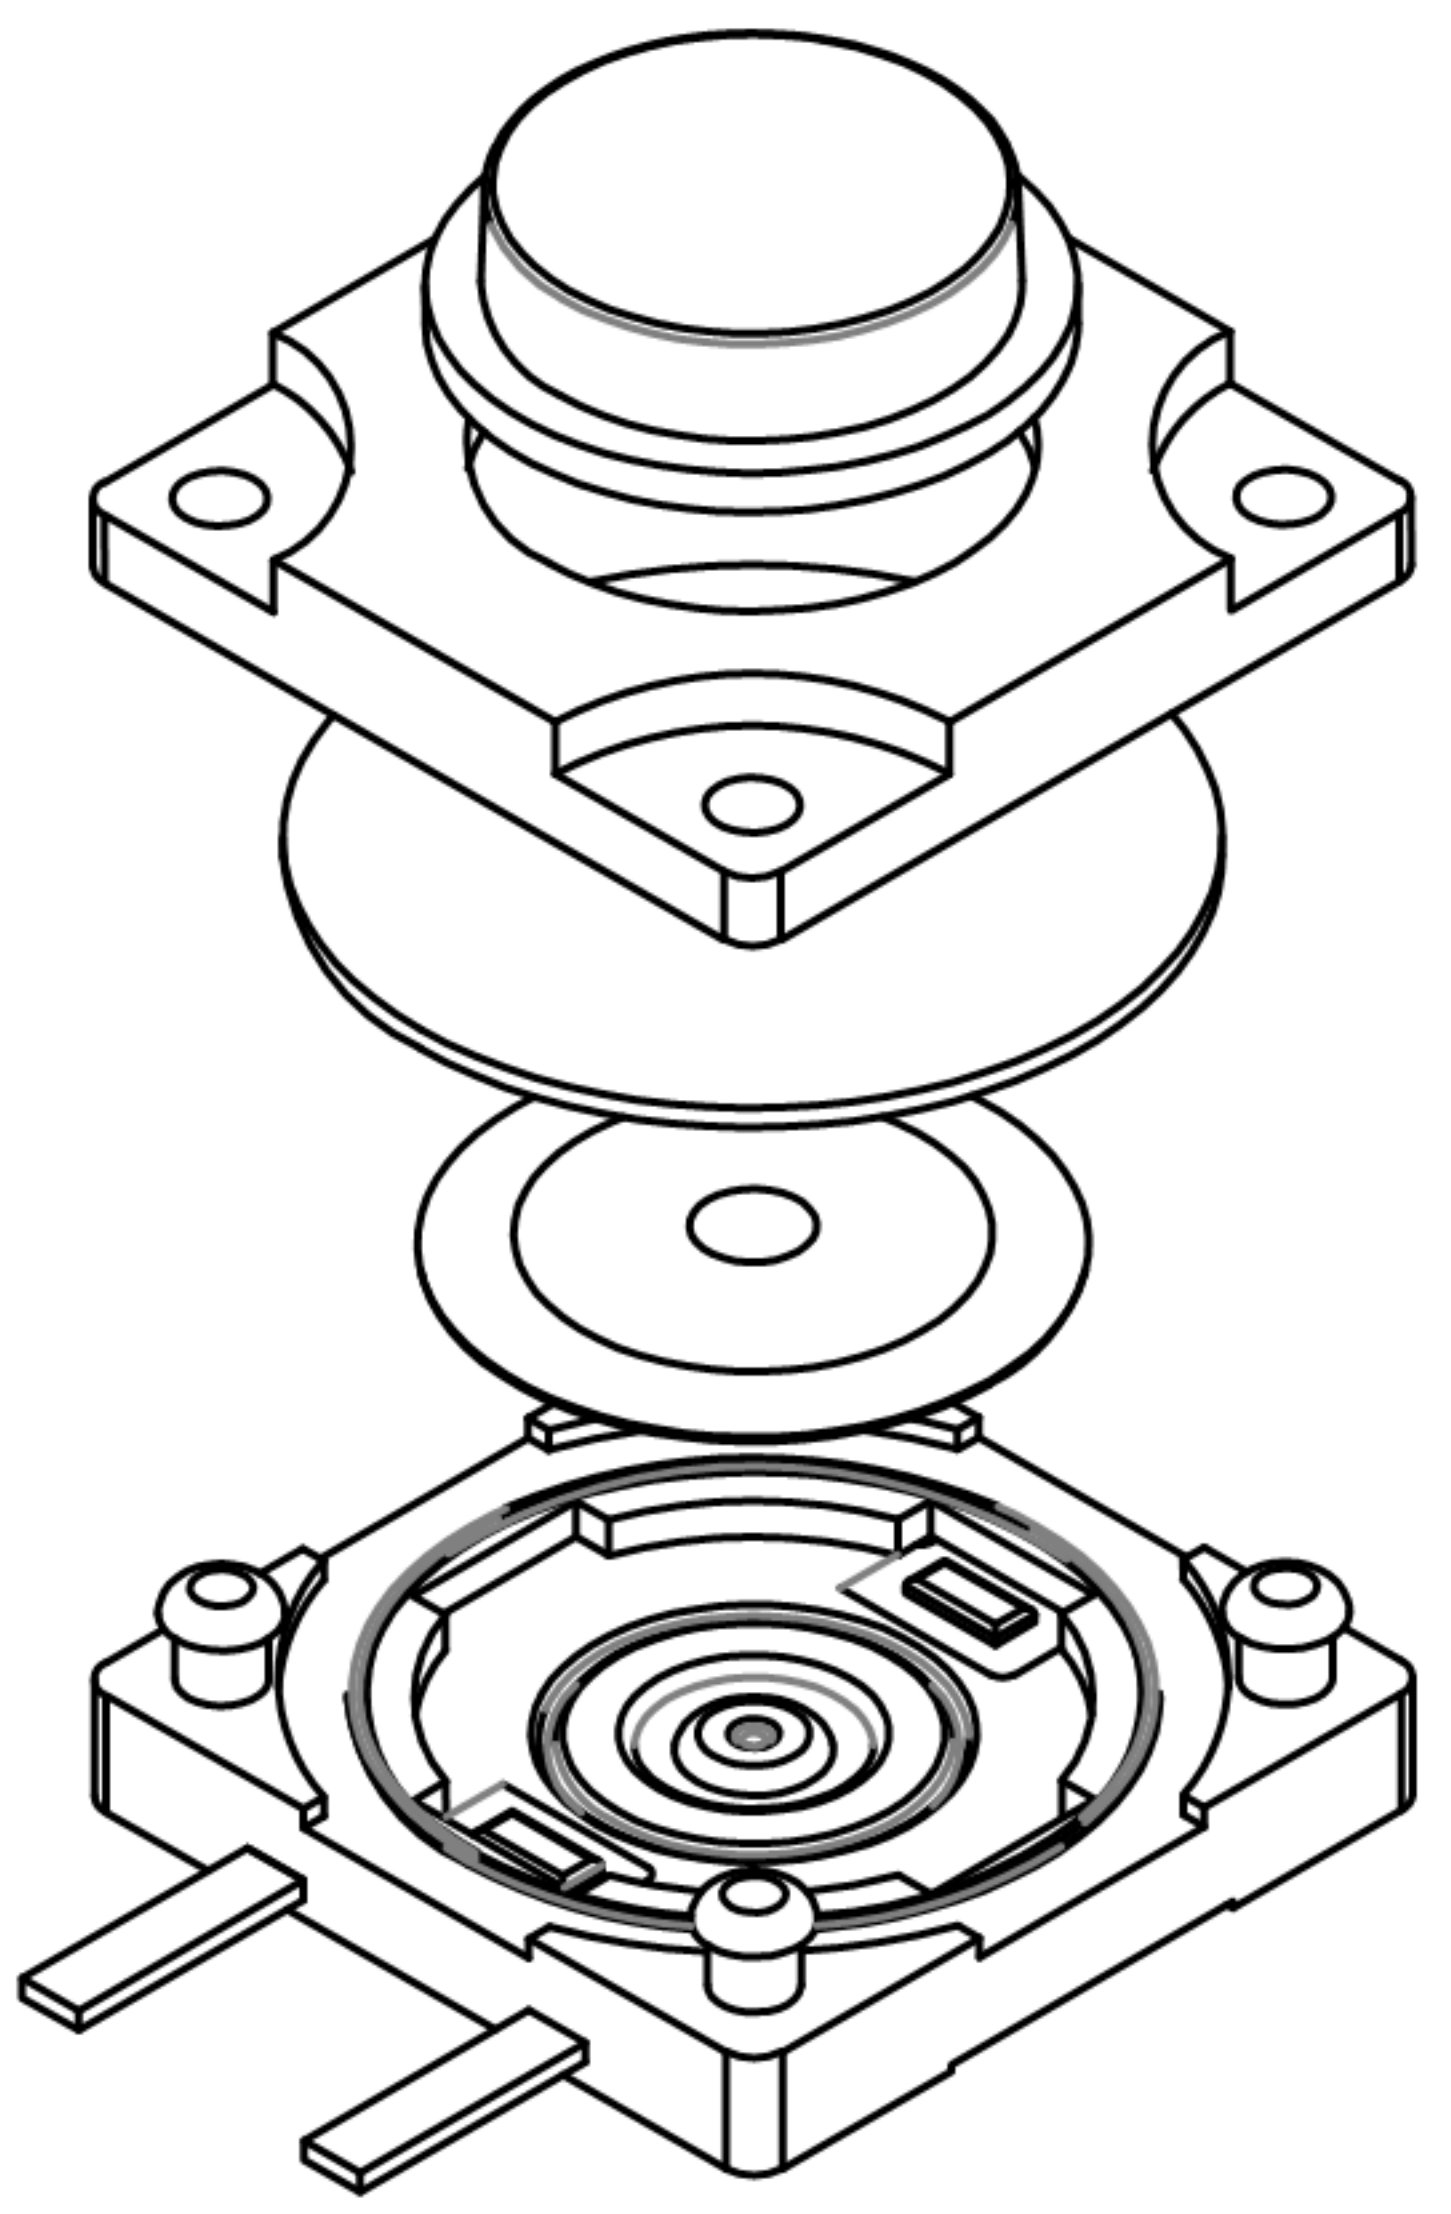

CAD FILE:

PCB. 焊接图

| H     |       |
|-------|-------|
| 4.3   | 4.5   |
| 5.0   | 5.5   |
| 6.0   | 6.5   |
| ..... | ..... |
| 13.0  | 13.5  |
| 14.0  | 15.0  |

电路图  
SCHEMATIC

主要技术规格:

- 额定值: 50mA DC12V
- 接触电阻: ≤50mΩ
- 操作力: 250±40gf
- 行程: 0.45±0.1mm
- 绝缘电阻: ≥100MΩ
- 抗电强度: 250V 50HZ 1Min.
- 寿命: 100,000 Cycles
- 防水等级: IP67
- 防银迁移: 60V, 85℃, 90%RH/60H

|     |         |                 |      |                 |                                                                                                                                                                           |       |           |                          |                            |
|-----|---------|-----------------|------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----------|--------------------------|----------------------------|
| 8   |         |                 |      |                 | TOLERANCE                                                                                                                                                                 |       |           |                          |                            |
| 7   |         |                 |      |                 | UNLESS SPECIFIED                                                                                                                                                          |       |           |                          |                            |
| 6   |         |                 |      |                 | WITHIN 1.5mm : ±0.1mm                                                                                                                                                     | A     | 2012-9-25 | 初 版                      | ZENQ. CHEN                 |
| 5   |         |                 |      |                 | OVER 1.5mm : ±0.2mm                                                                                                                                                       | ISSUE | DATE      | DESCRIPTIONS OF REVISION | APPD.                      |
| 4   | CONTACT | SUS             | 1    | Ag CLAD         | TITLE : TACT SWITCH                                                                                                                                                       |       |           | UNIT : mm                | DRWG NO.: XB-TS-FS12-C     |
| 3   | CASE    | PPA/BRASS SRTIP | 1    | BLACK/Ag PLATED | MODEL:                                                                                                                                                                    |       |           | SCALE: 5:1               | DWN. JUN. YANG 2012-9-25   |
| 2   | COVER   | STEEL STRIP     | 1    | Ni PLATED       |                                                                                                                                                                           |       |           |                          | CHK'D DONG. PANG 2012-9-25 |
| 1   | KNOB    | PPA             | 1    | BLACK           |                                                                                                                                                                           |       |           |                          | APPD. ZENQ. CHEN 2012-9-25 |
| NO. | PARTS   | MATERIALS       | Q'TY | FINISH          | <div><div>东莞市溪榜电子有限公司</div><div>DONG GUAN XI BANG ELECTRONI CS CO., LTD.</div></div> |       |           |                          |                            |