

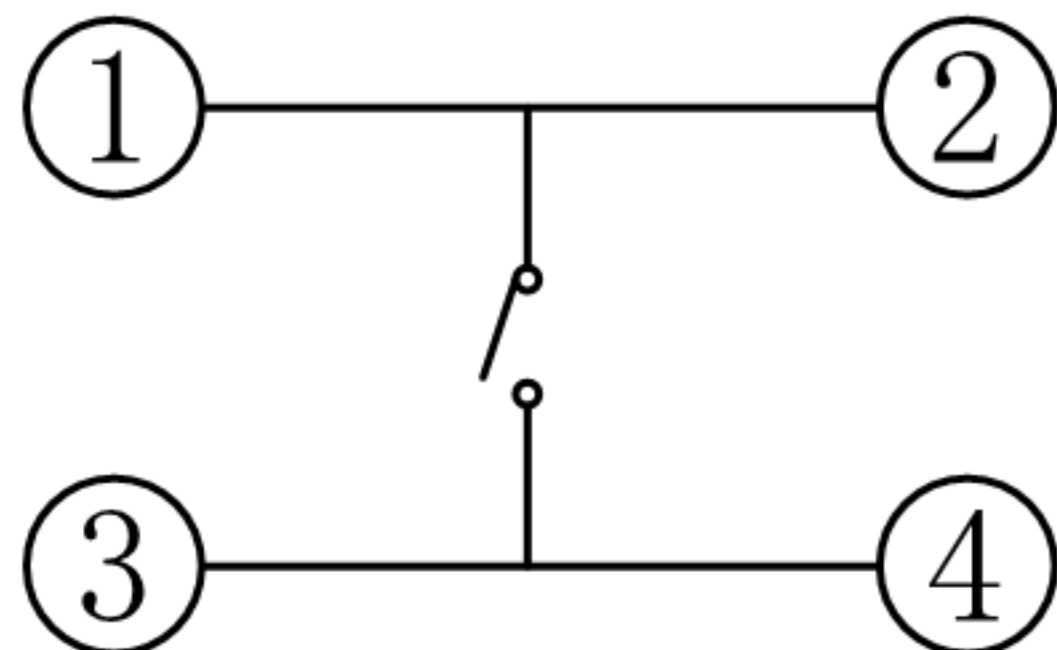
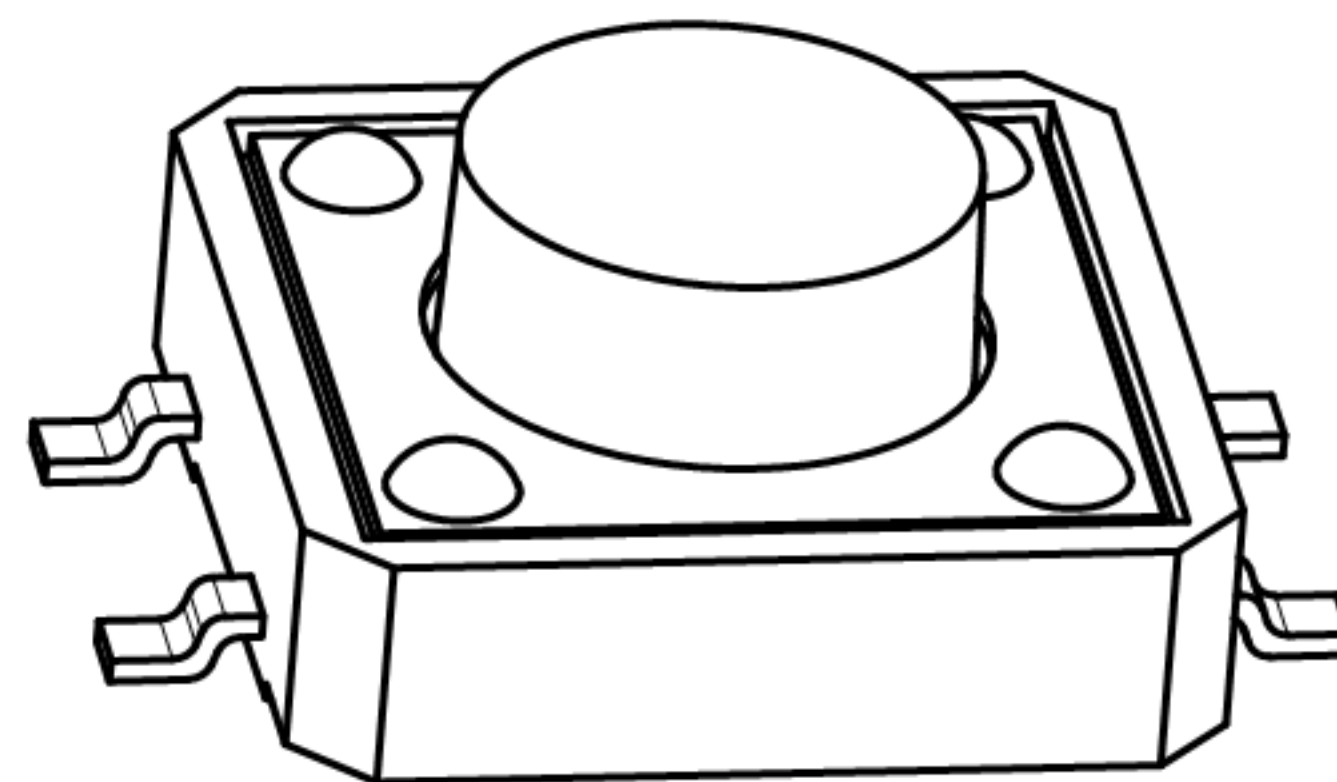
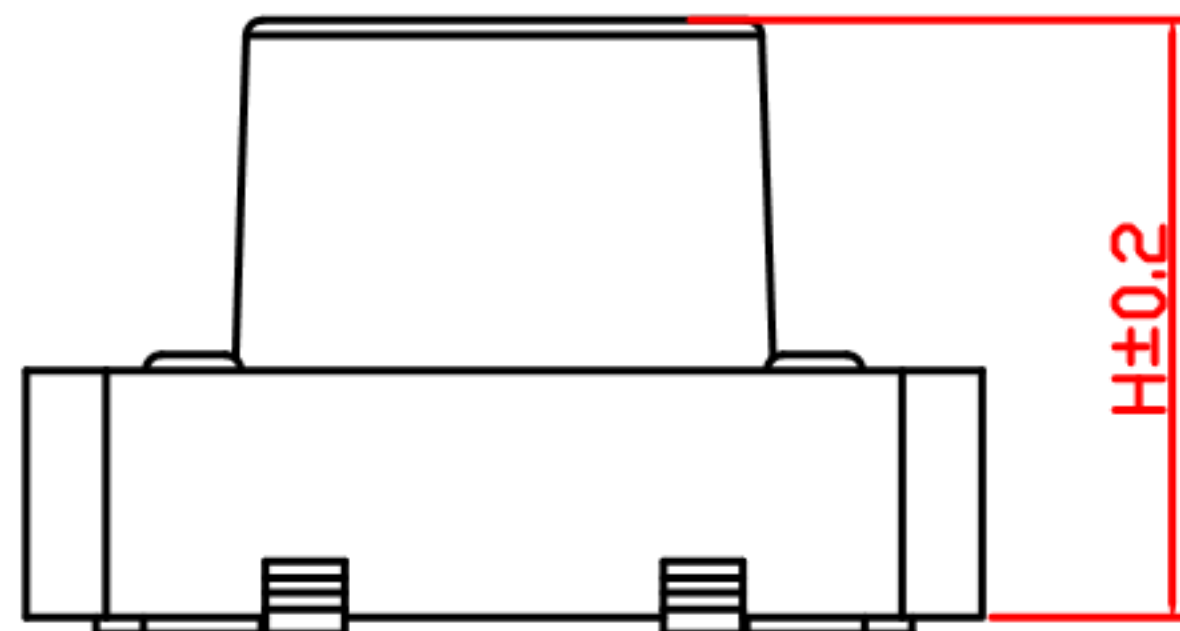
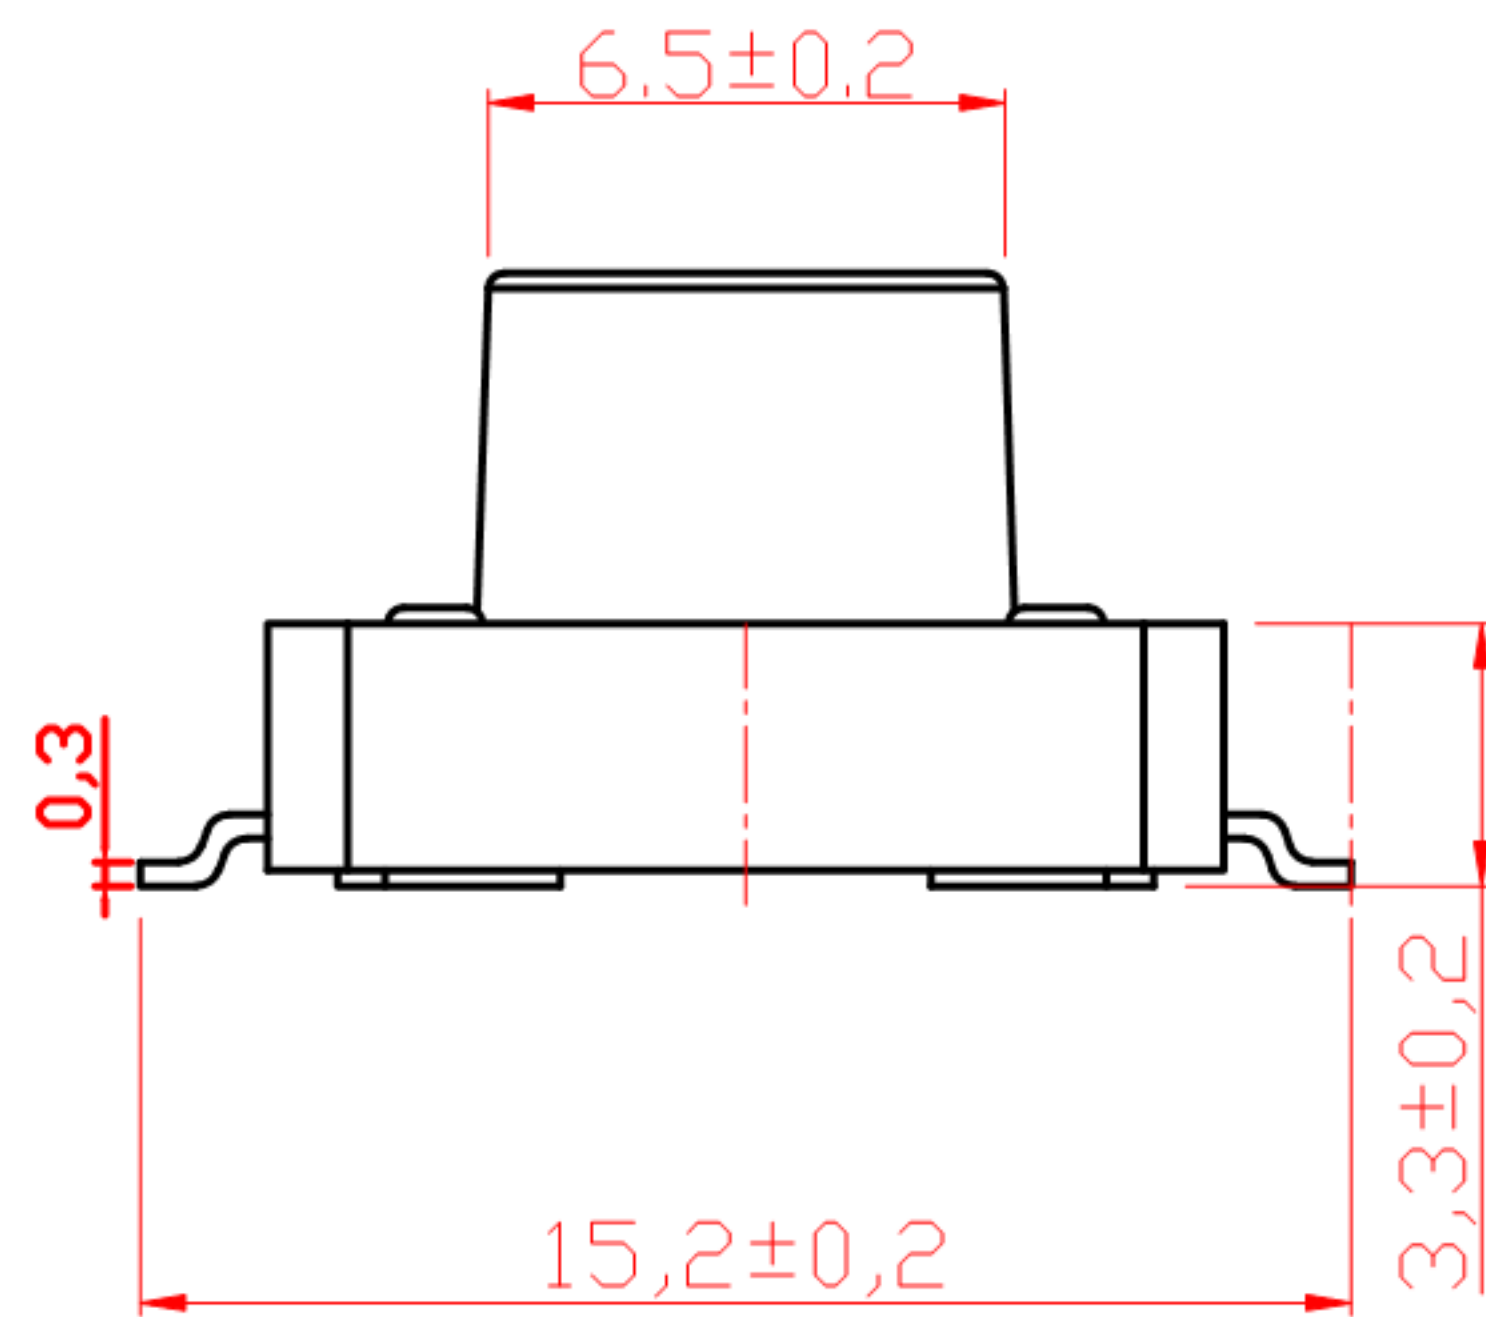
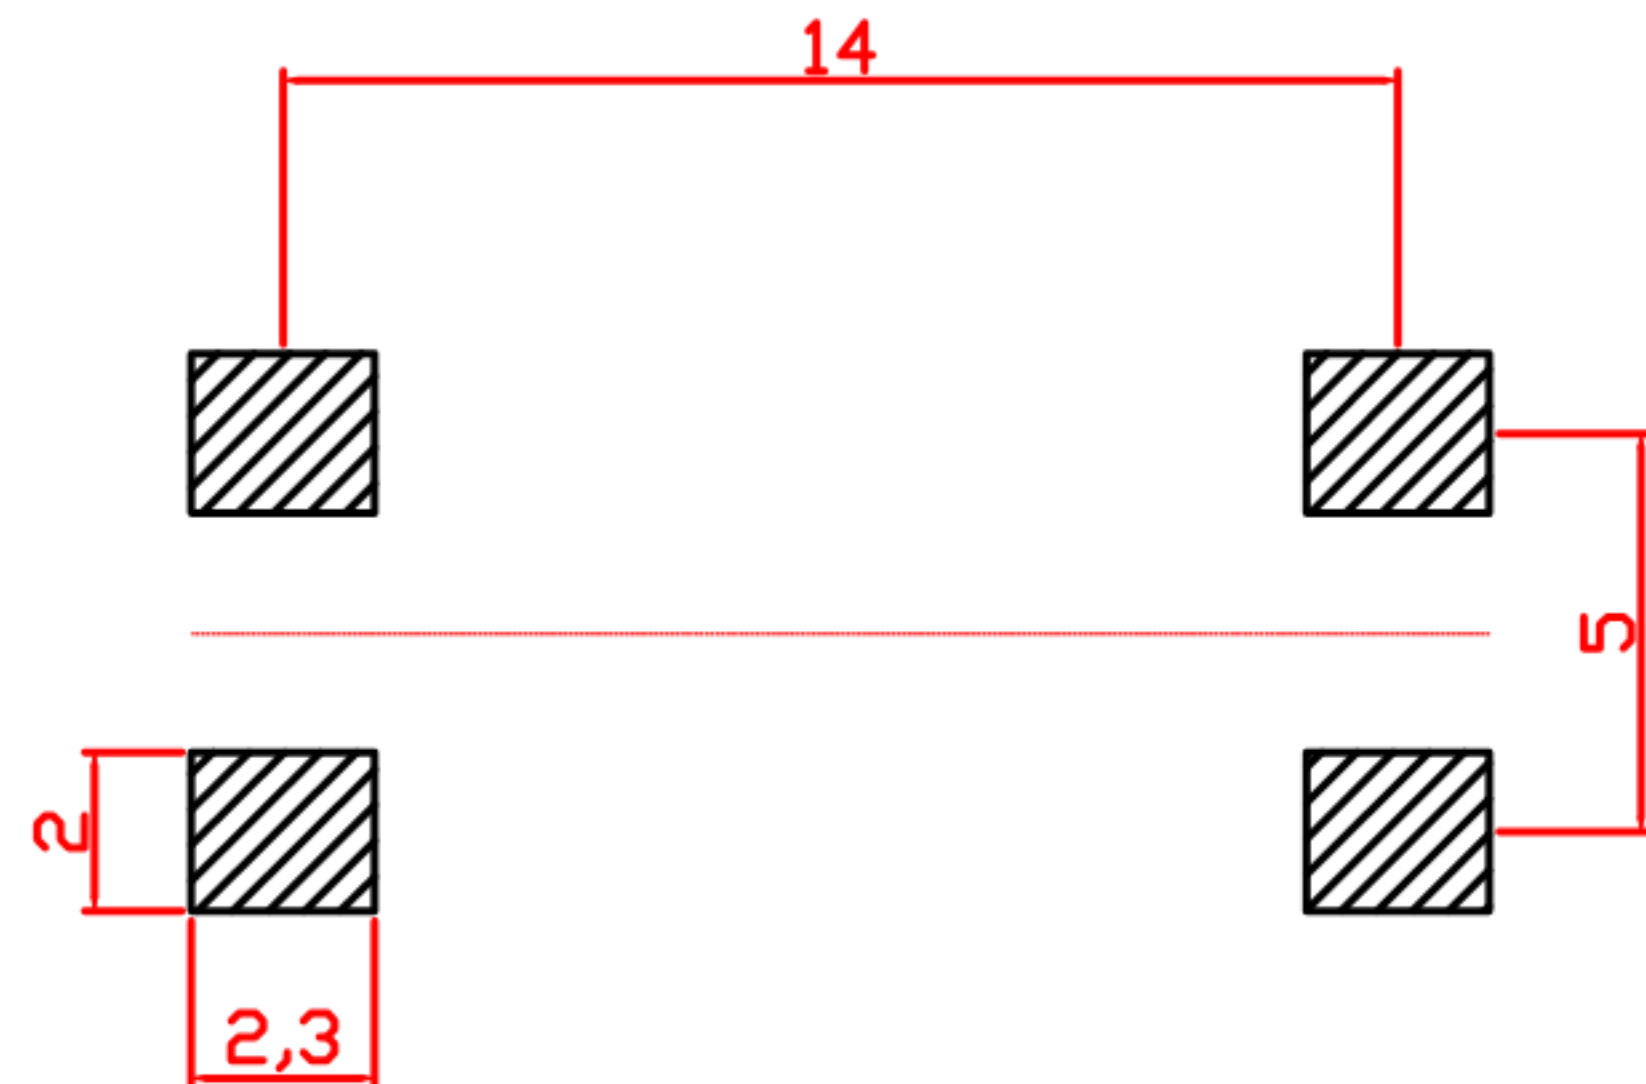


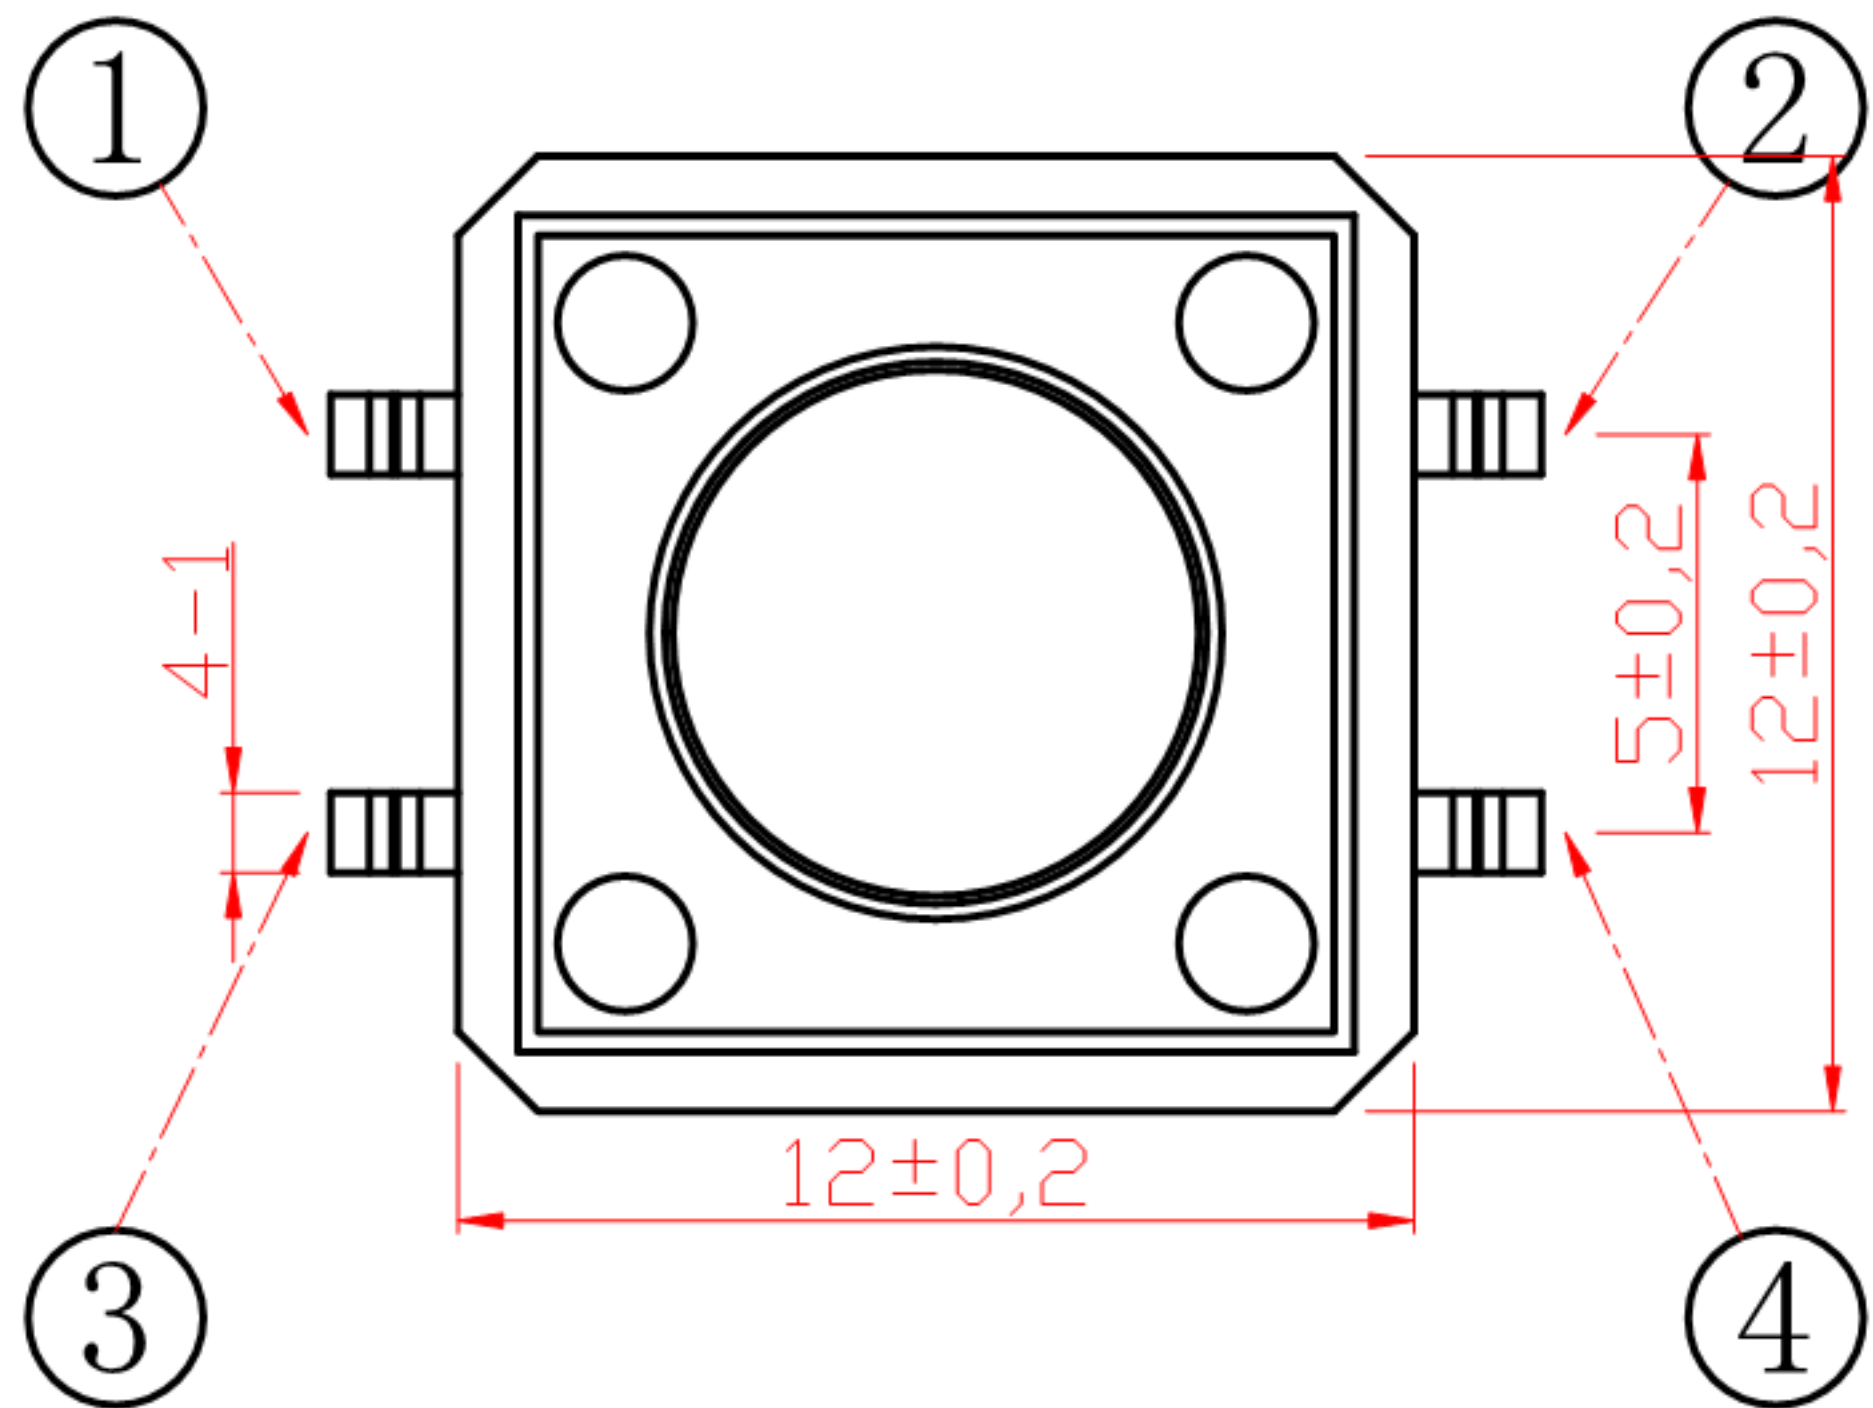

SCHEMATIC

H	H
4.3	4.5
5.0	5.5
6.0	6.5
.....	
18.0	18.5
19.0	19.5

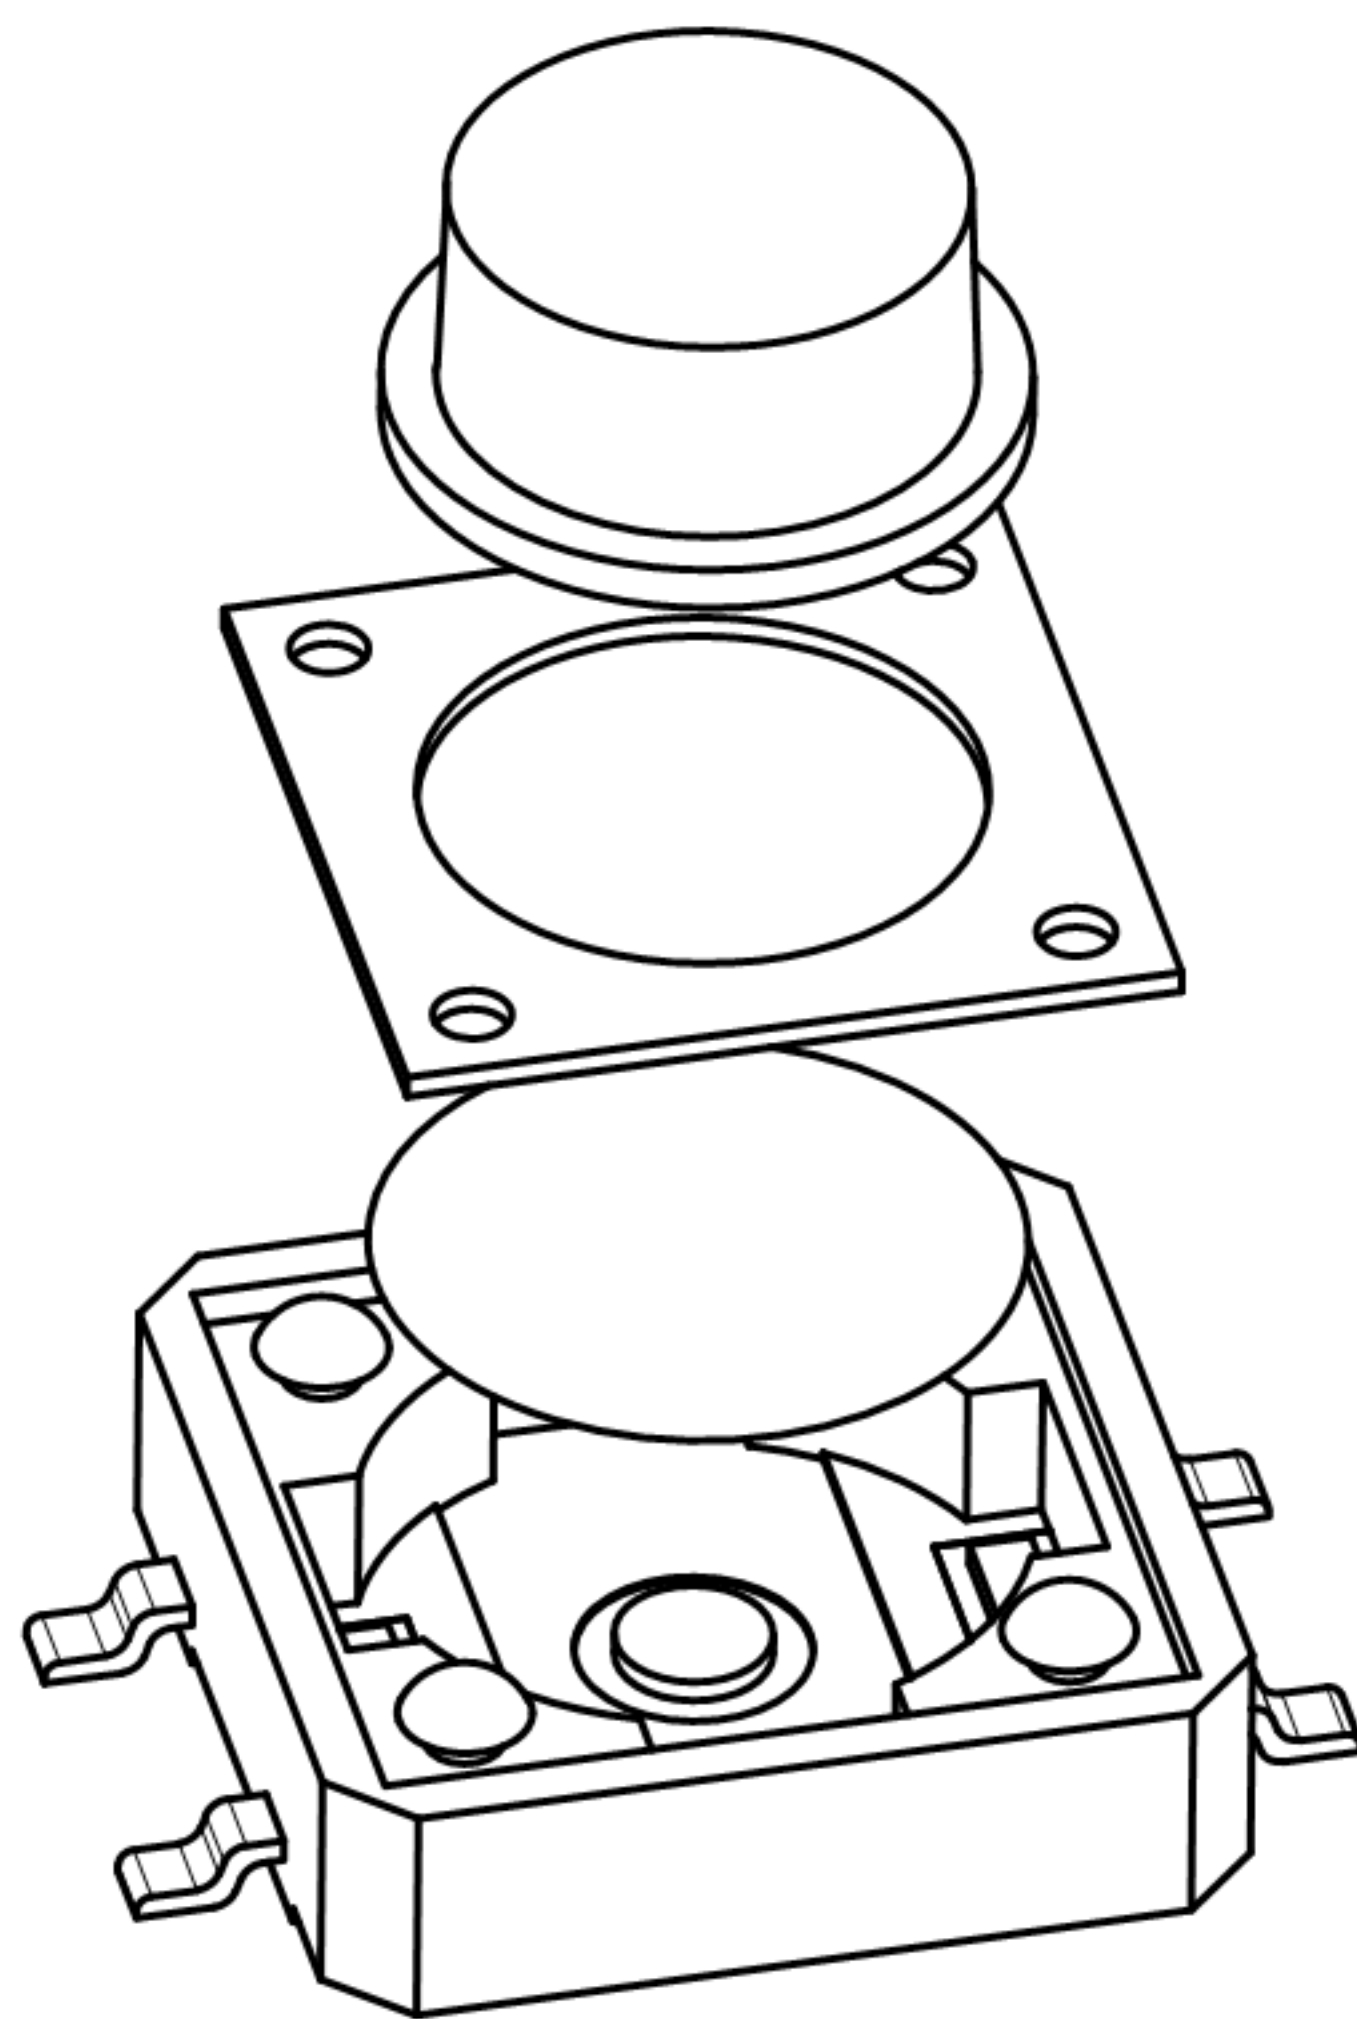

PCB焊接图

主要技术规格:

- 1. 额定值: 50mA DC12V
- 2. 接触电阻: ≤50mΩ
- 3. 操作力: 250±40gf
- 4. 行程: 0.35±0.1mm
- 5. 绝缘电阻: ≥100MΩ
- 6. 抗电强度: 250V 50HZ 1Min.
- 7. 寿命: 100,000 Cycles

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.:
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED				CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				