


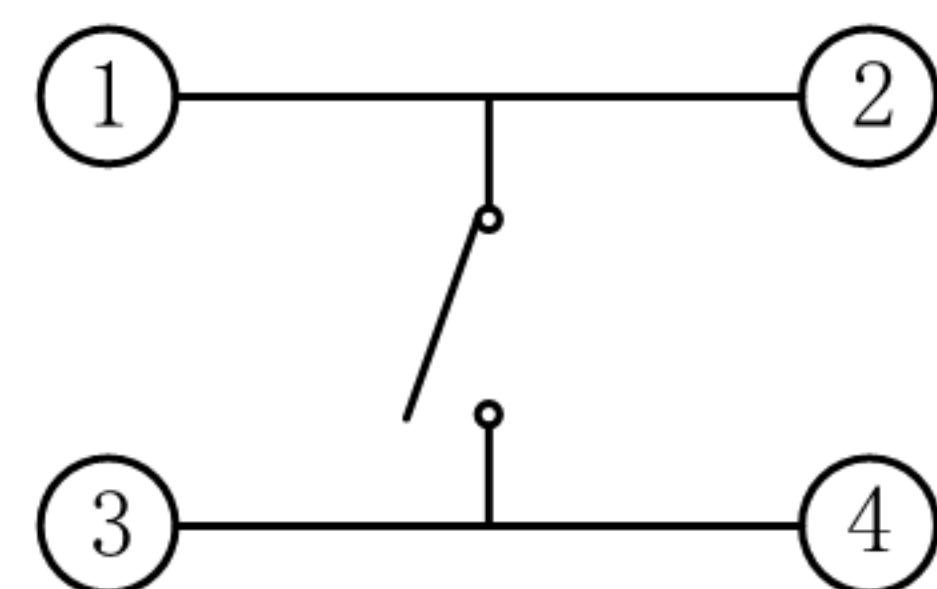
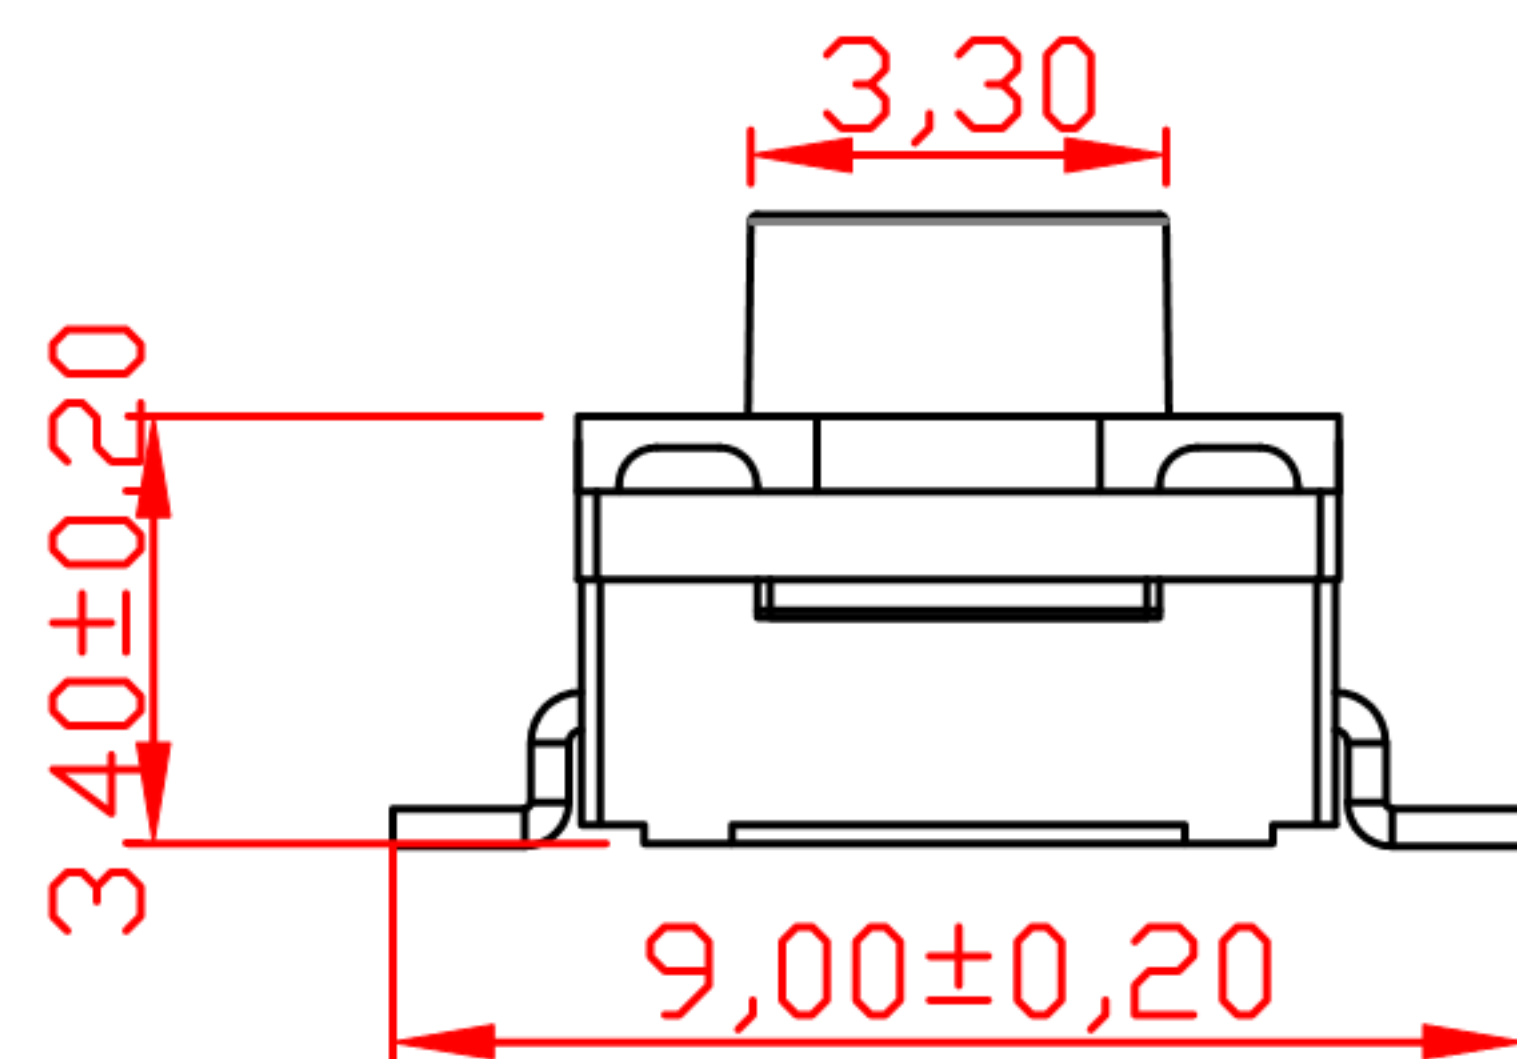
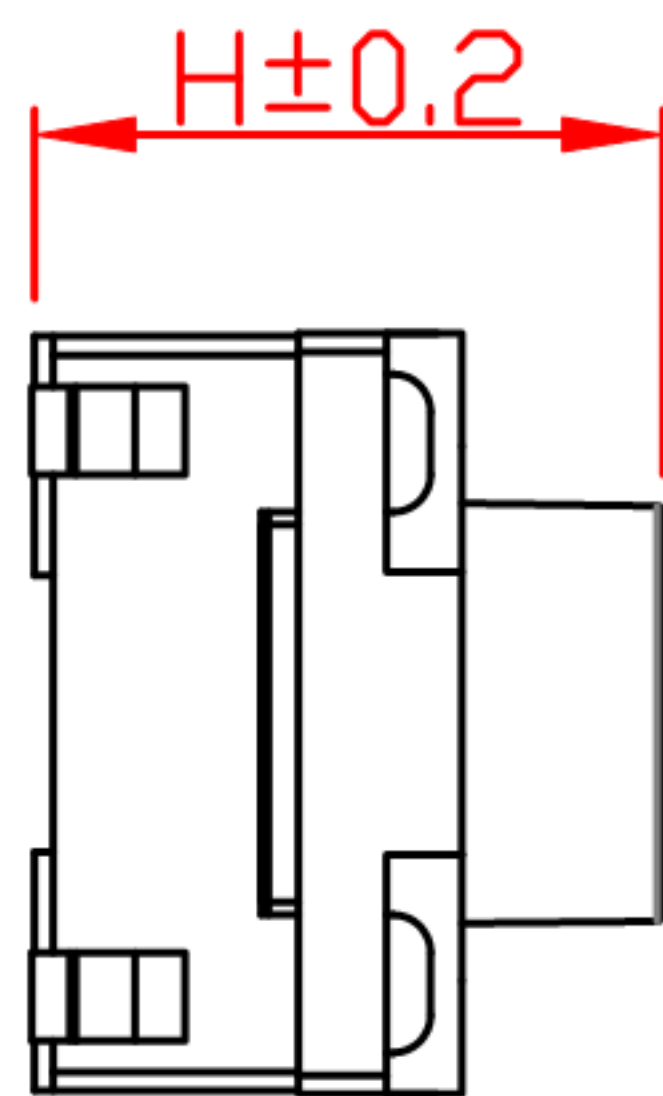
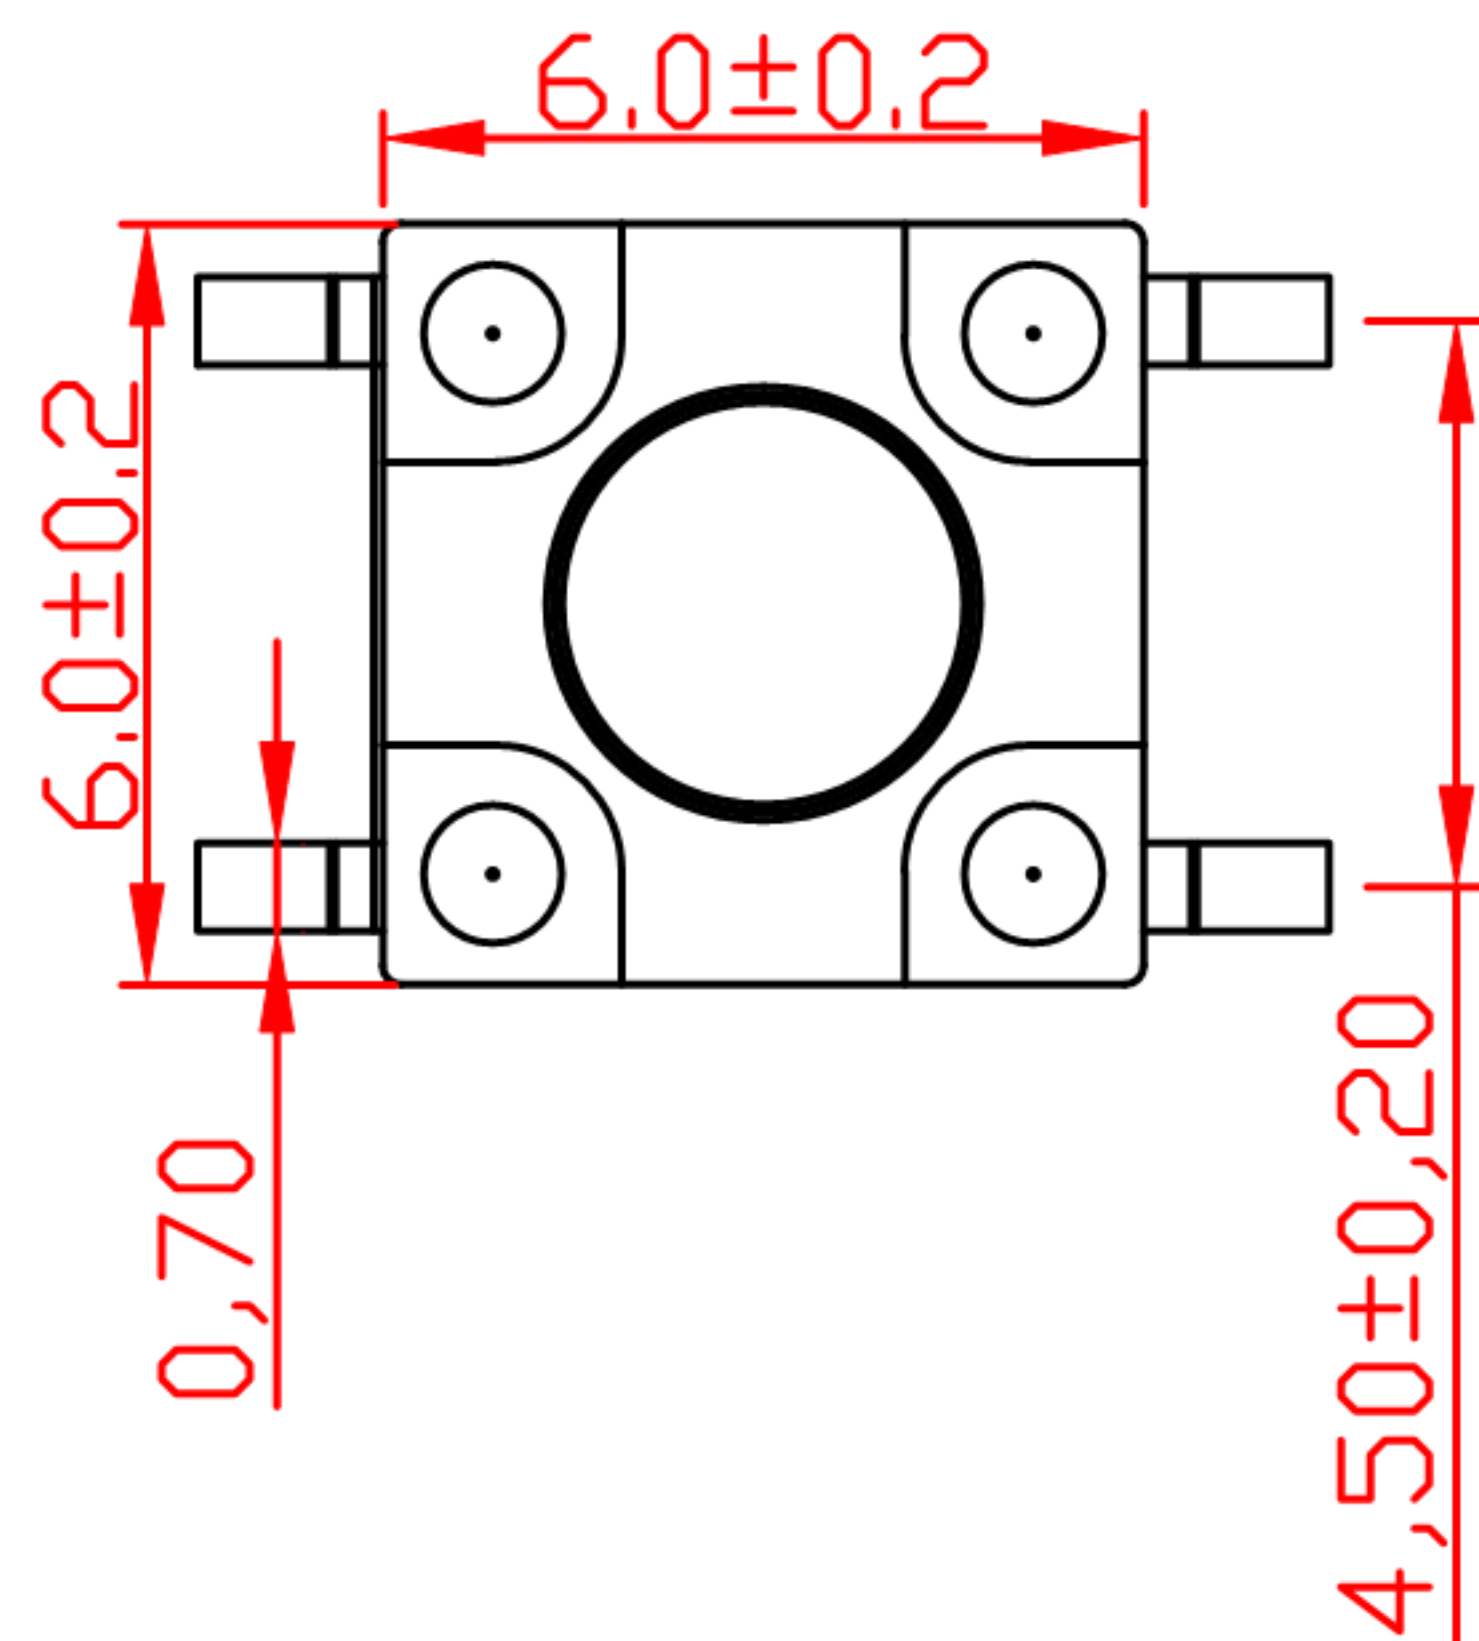


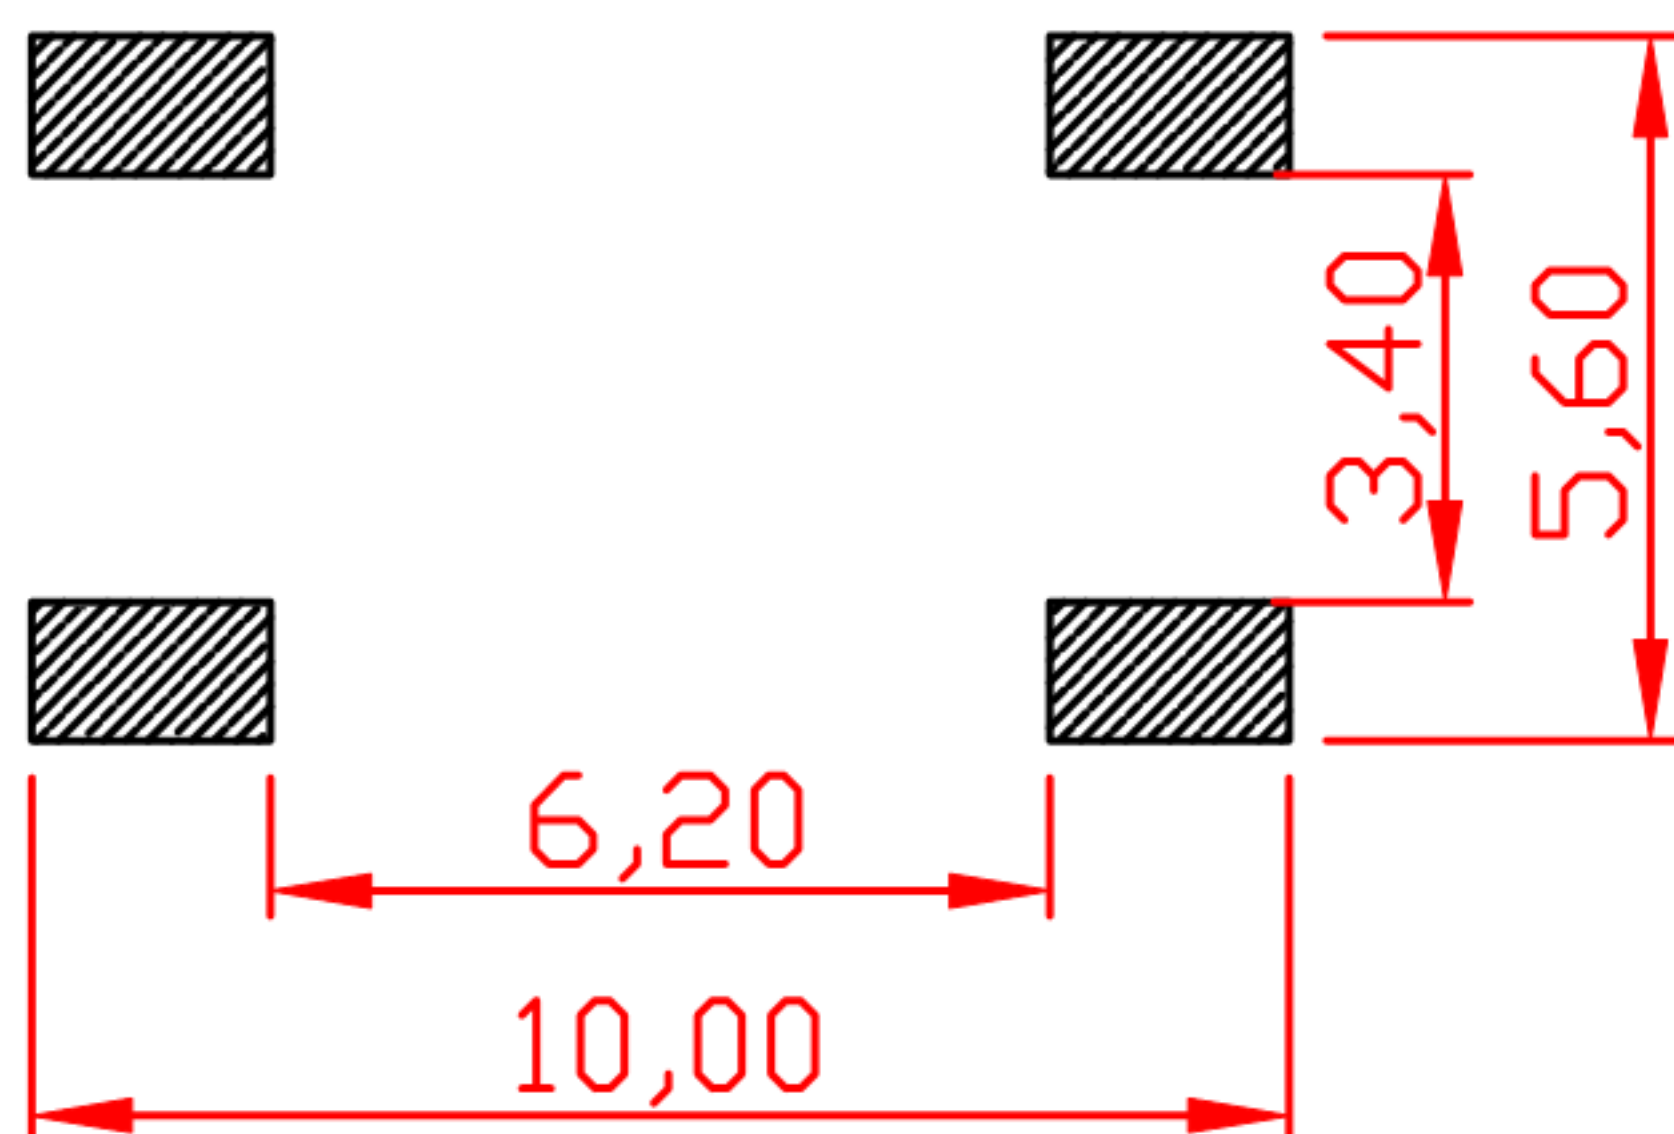

SCHEMATIC

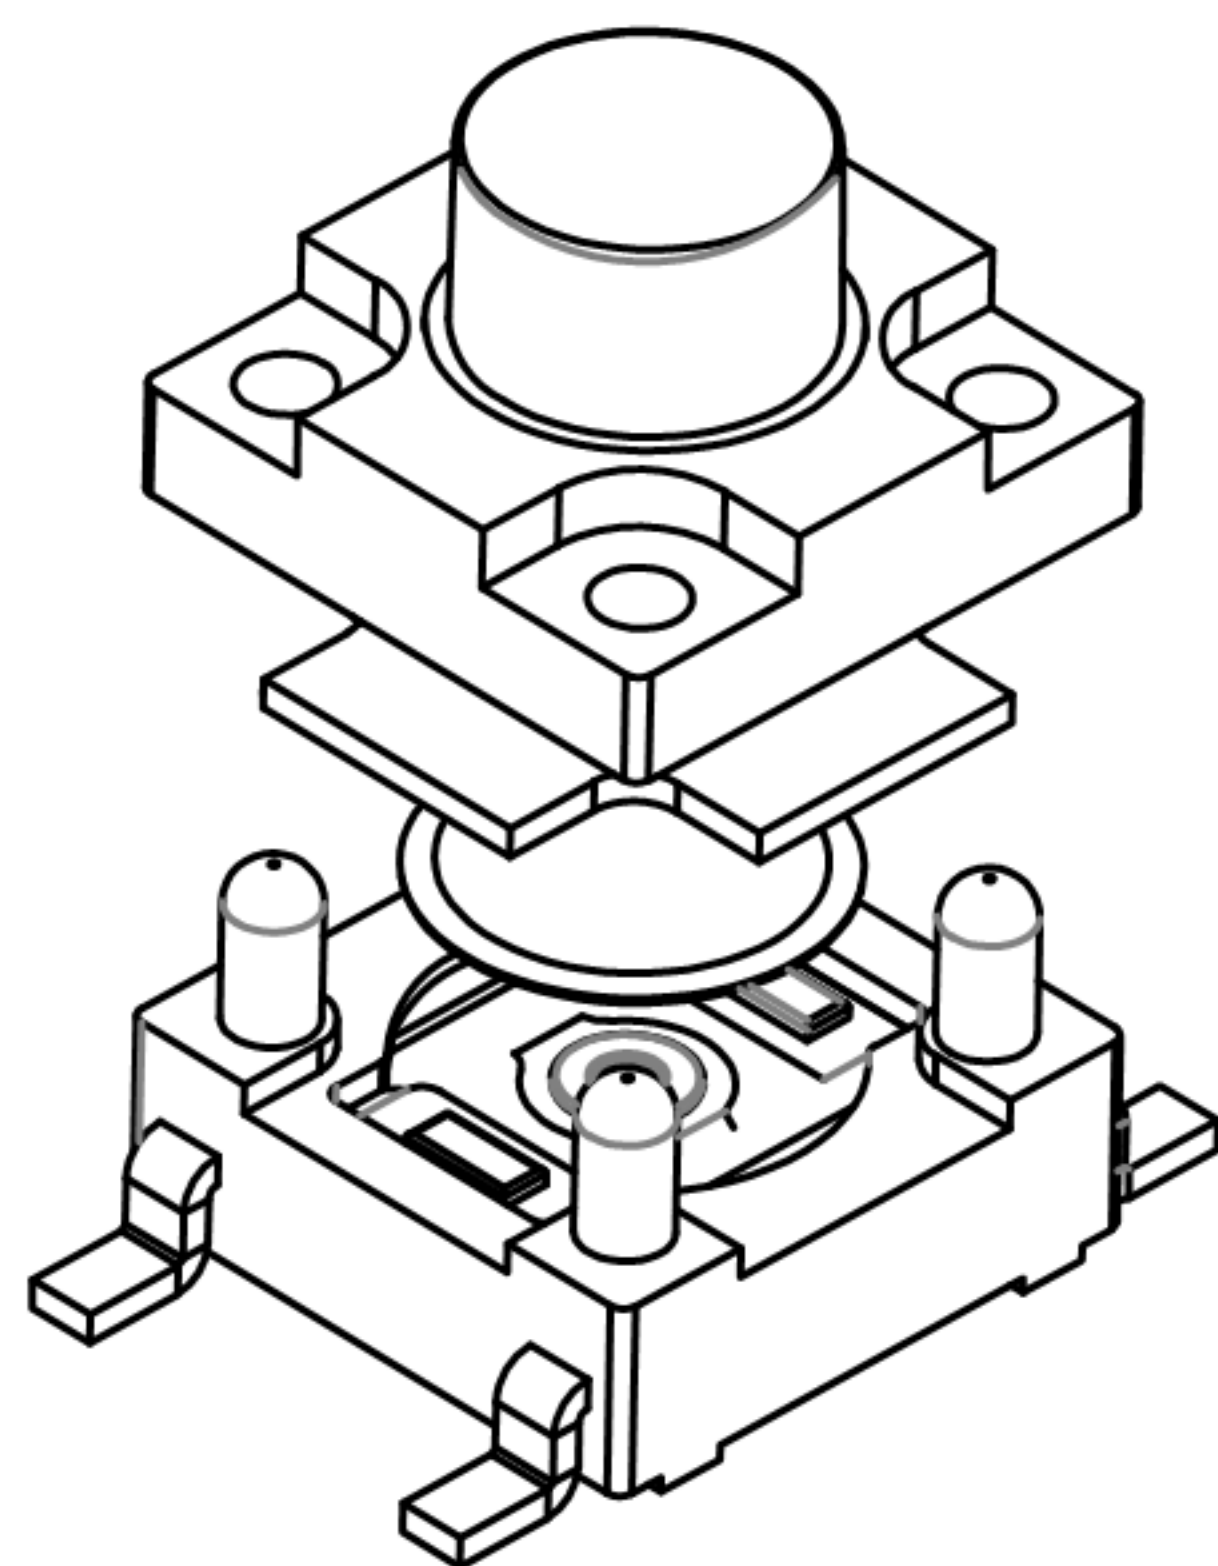

PCB. 焊接图

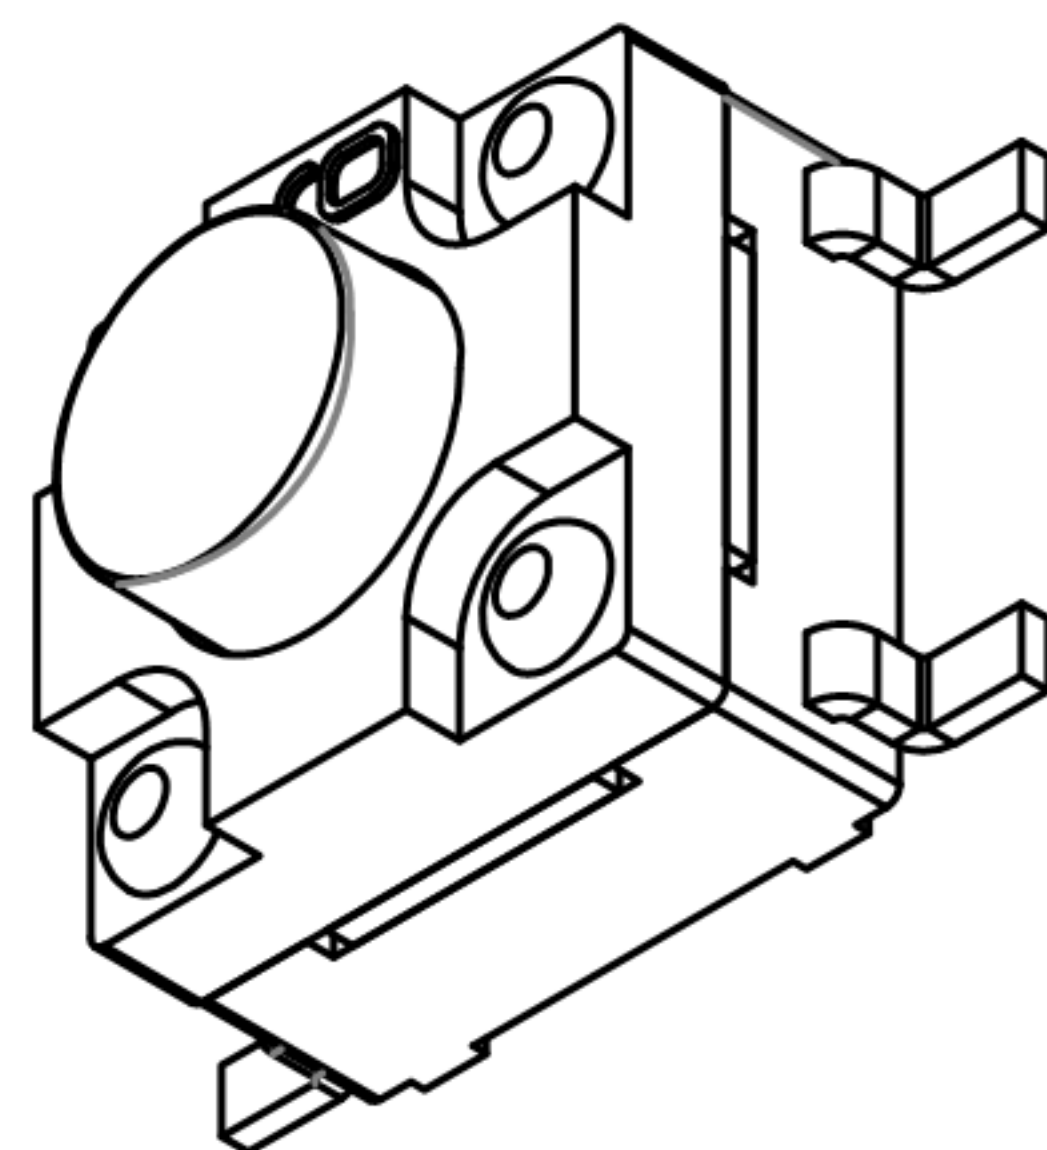

主要技术规格:

- 额定值: 50mA DC12V
- 接触电阻: $\leq 50\text{m}\Omega$
- 操作力: $160\text{gf} \pm 50\text{gf}$ & $250 \pm 50\text{gf}$
- 行程: $0.3 \pm 0.1\text{mm}$
- 绝缘电阻: $\geq 100\text{M}\Omega$
- 抗电强度: 250V 50HZ 1Min.
- 寿命: 100,000 Cycles
- 防水等级: IP67
- 防银迁移: 60V, 85°C, 90%RH/60H

H	
4.3	4.5
5.0	5.5
6.0	6.5
7.0	7.5
8.0	8.5
9.0	9.5

注: "*" 表示关键尺寸(4个).

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-66FS-M		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH							