

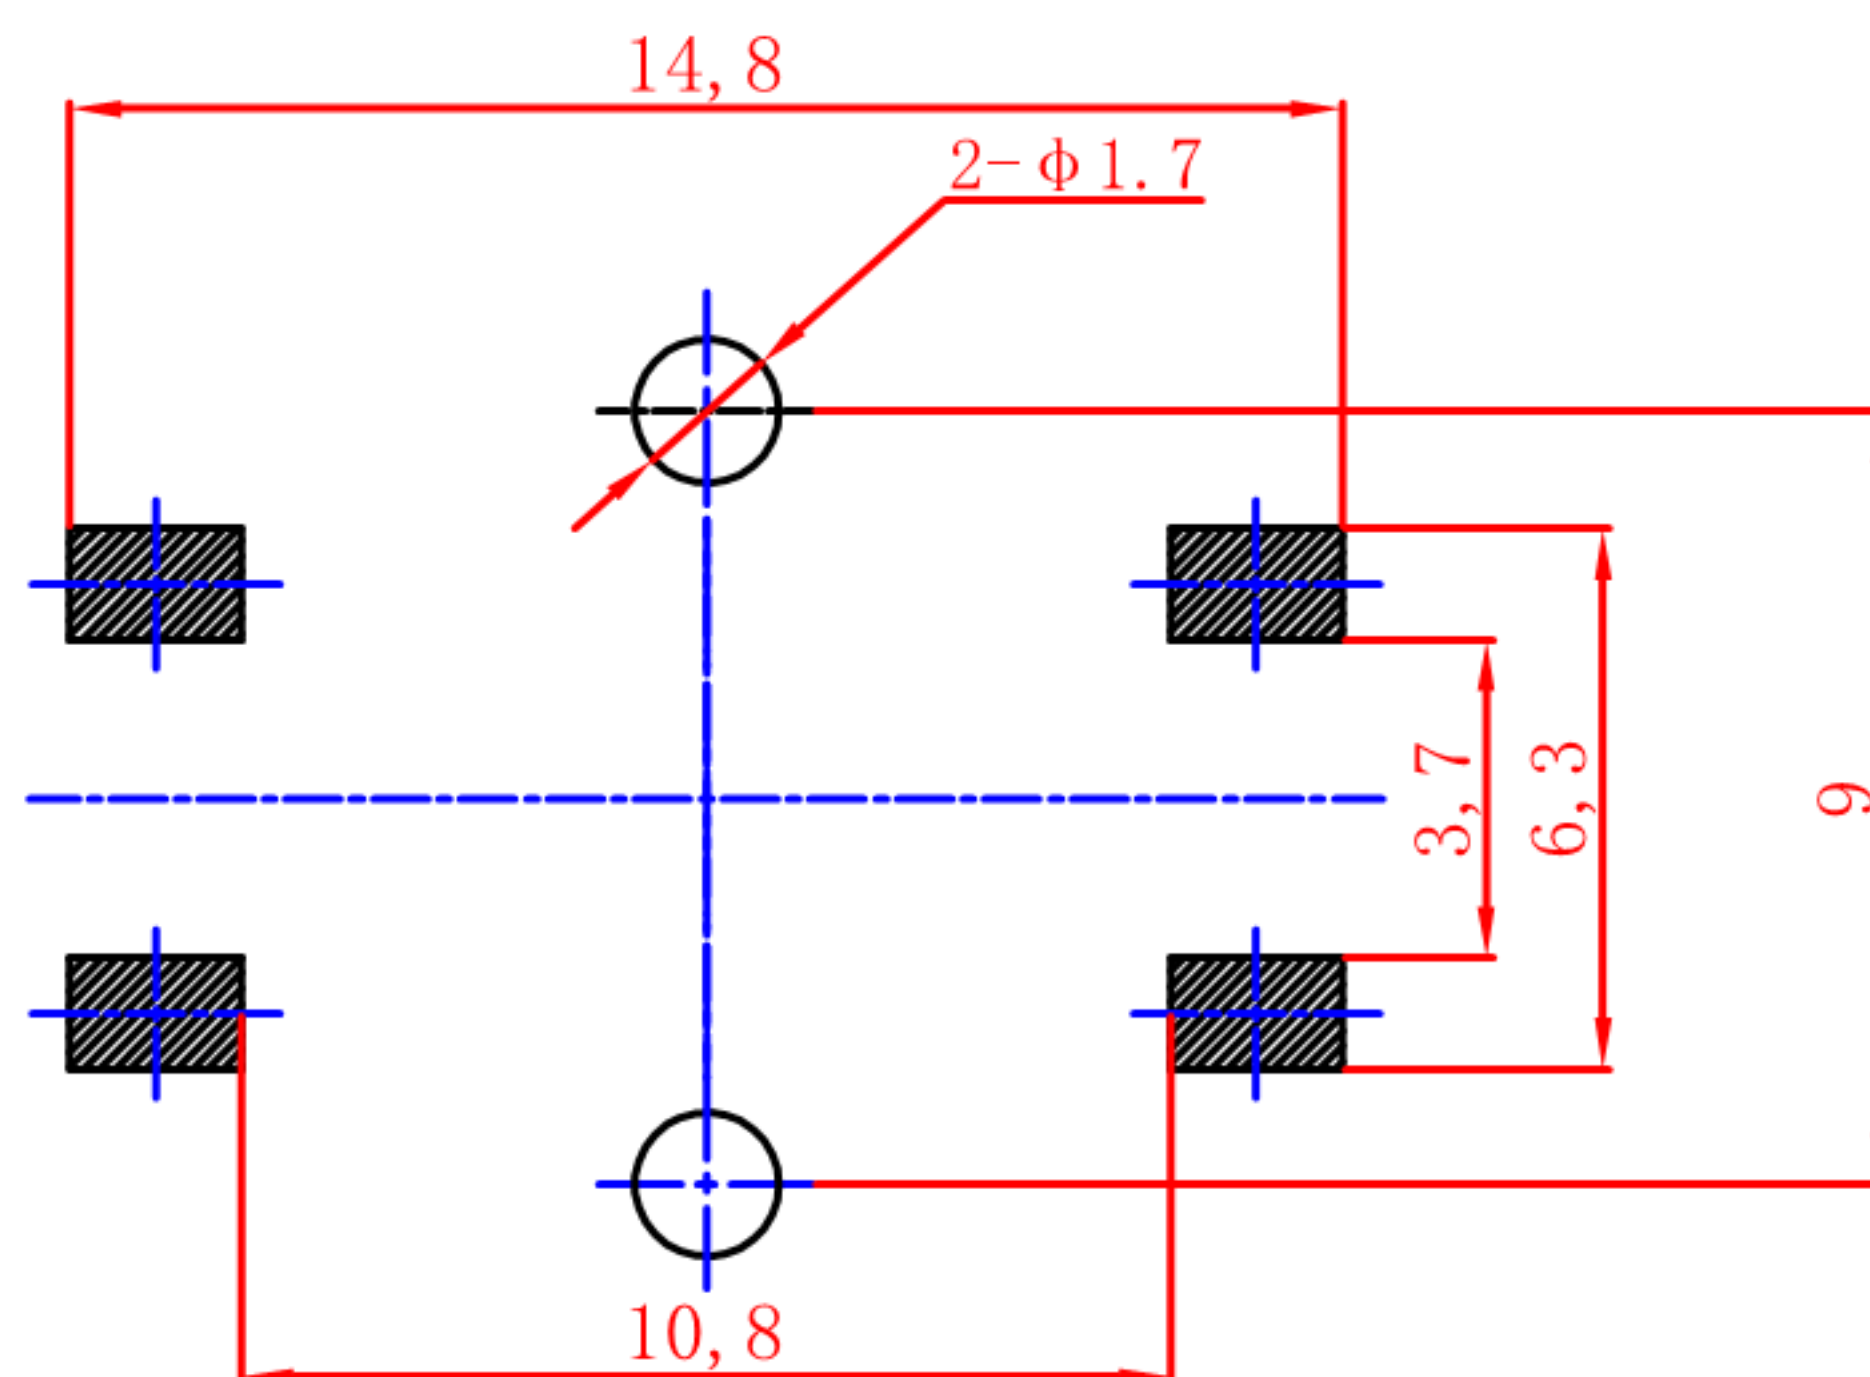
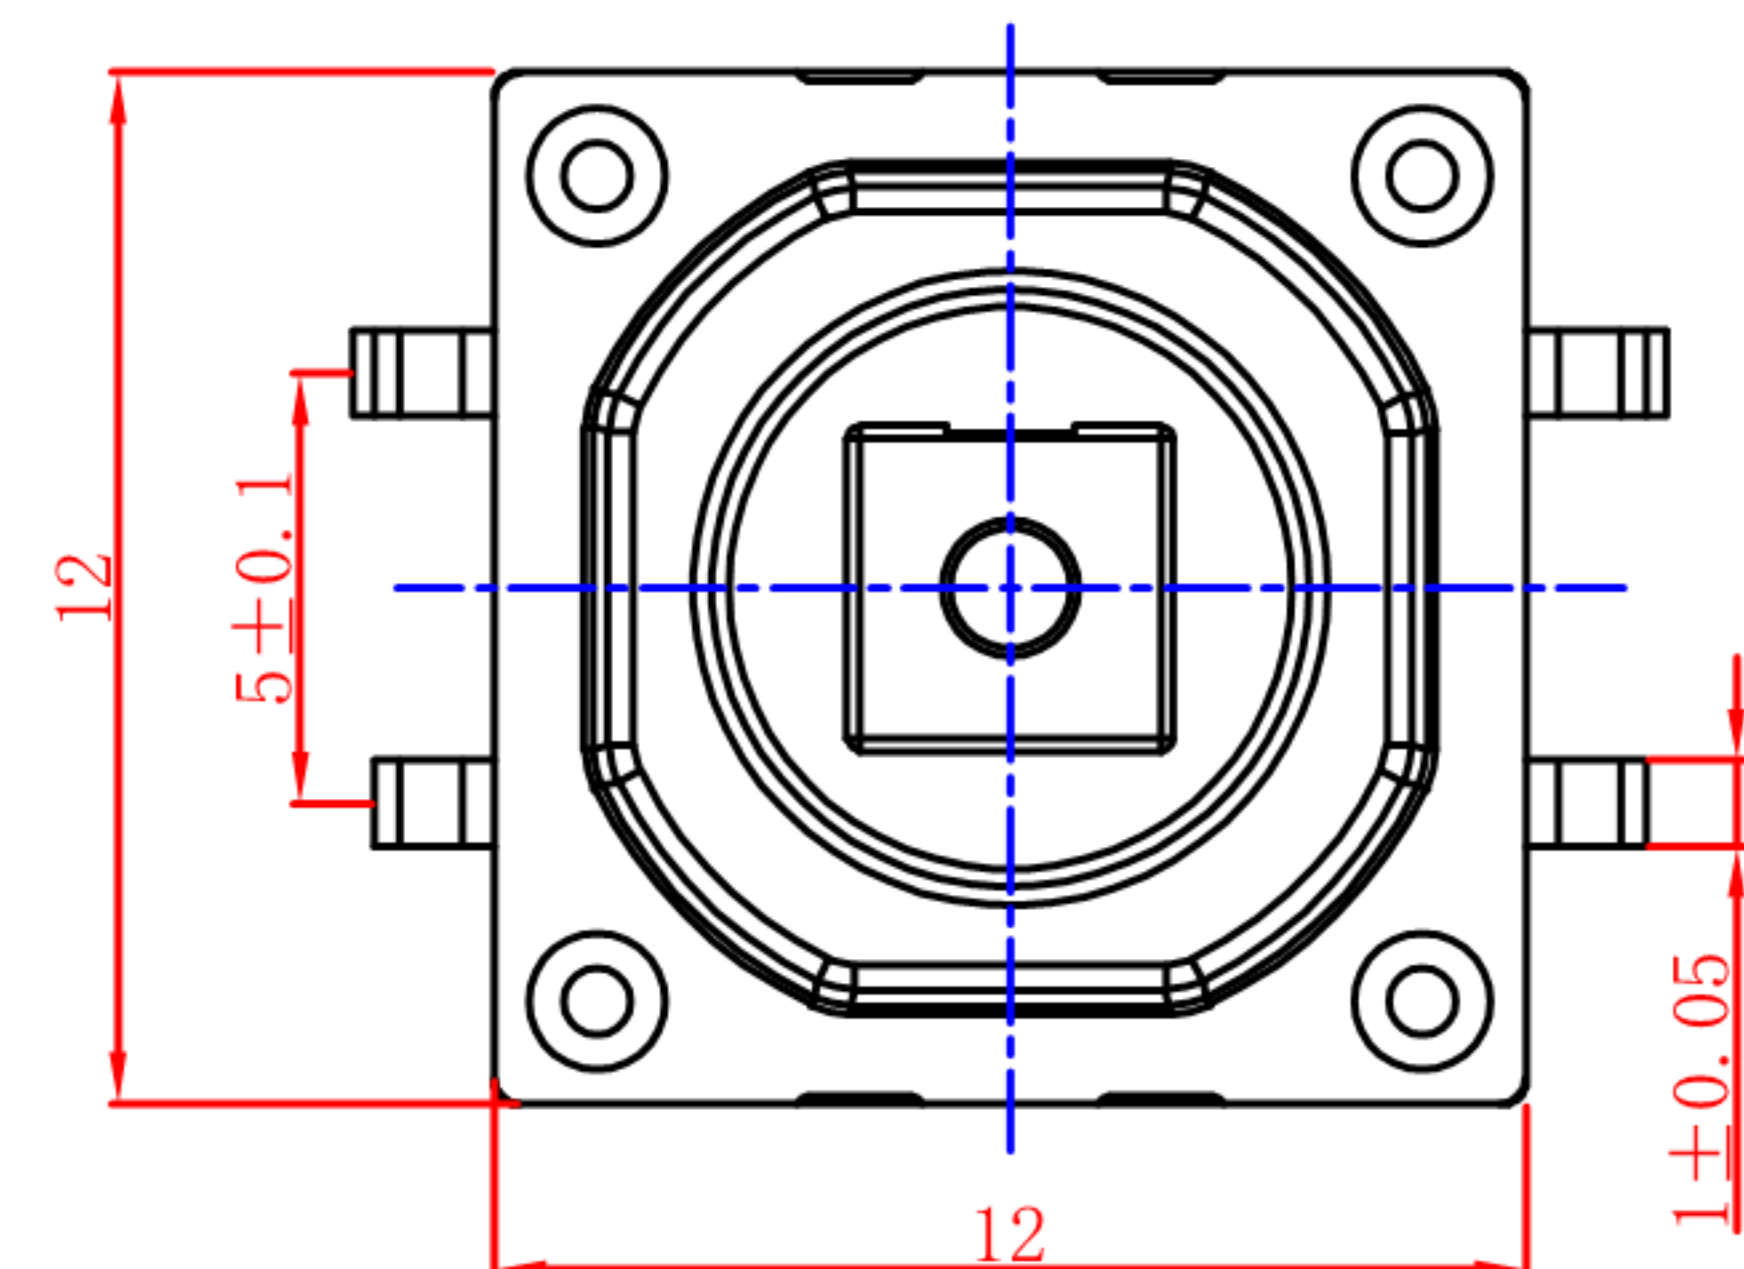
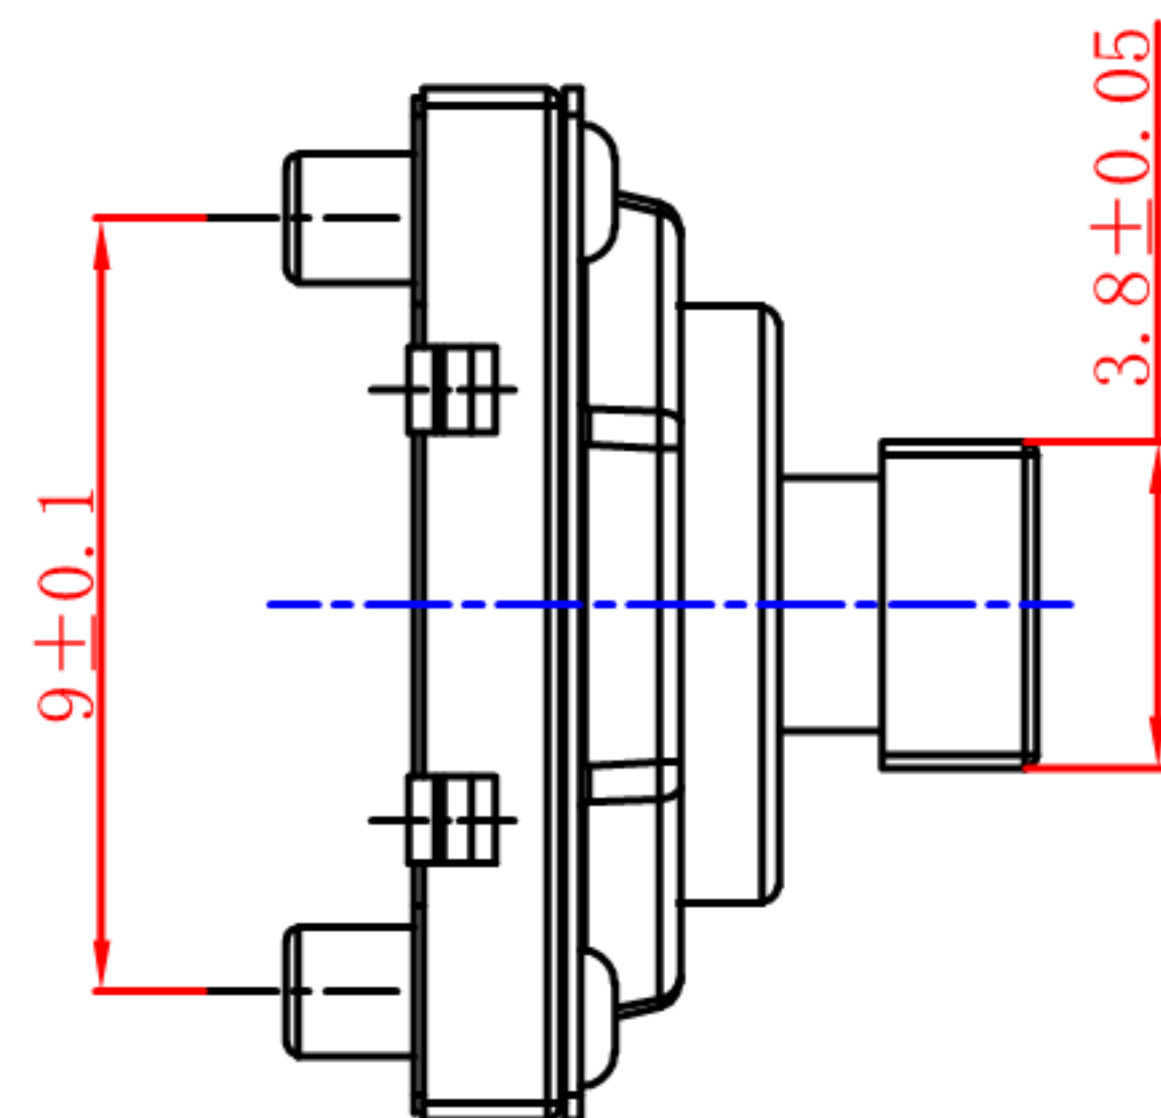
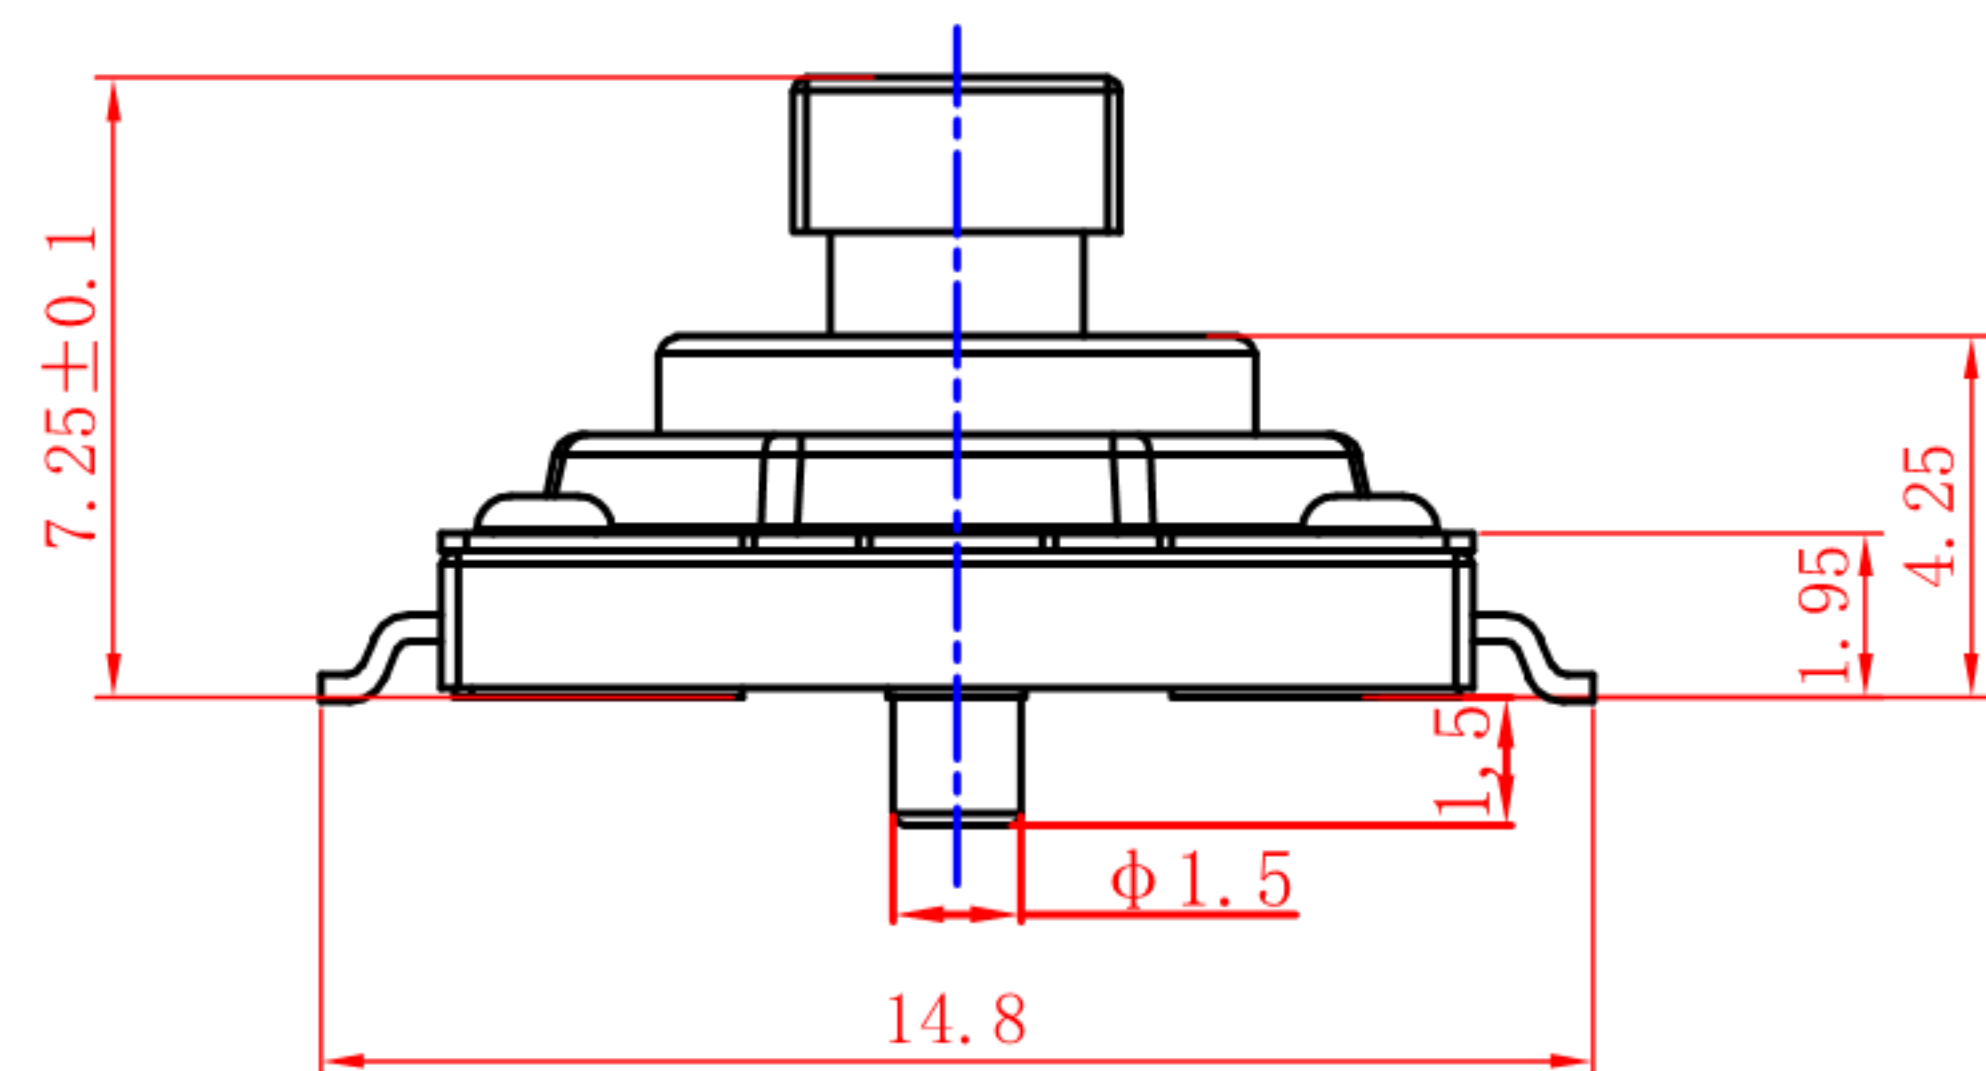


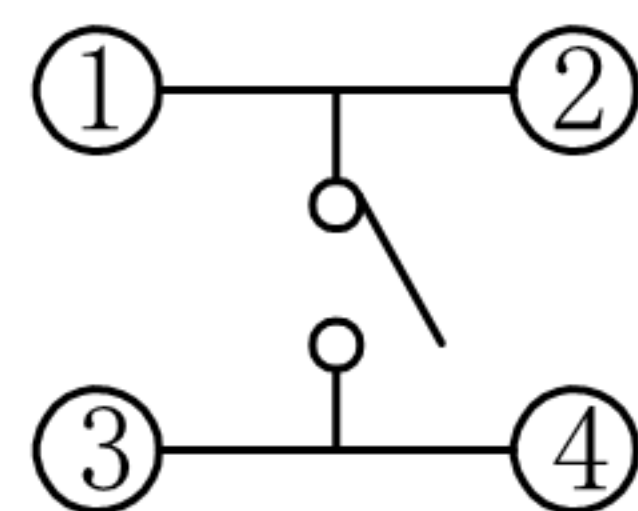

PCB. 焊接图

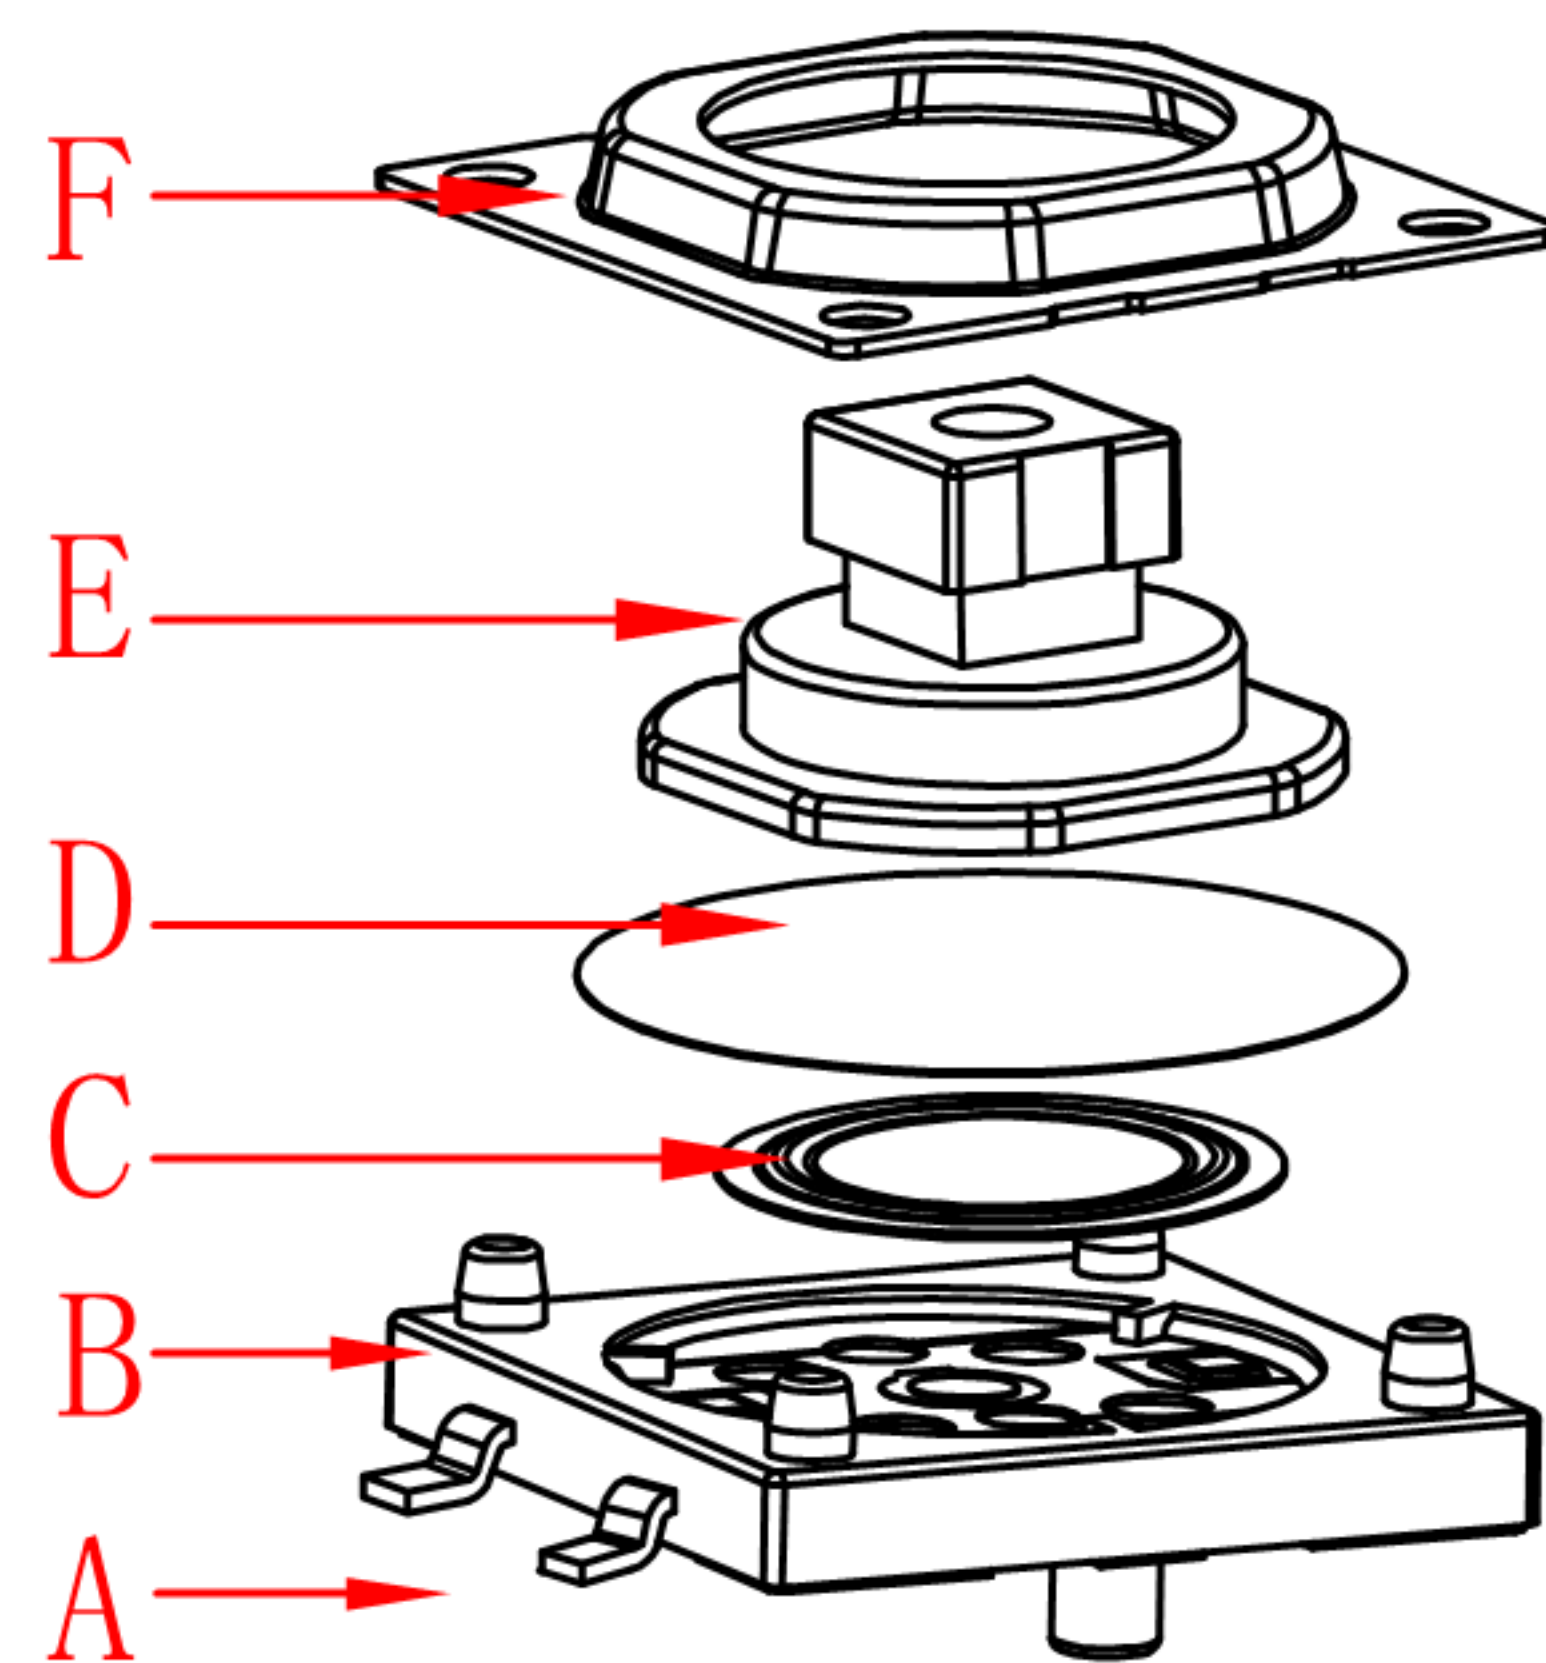

SCHEMATIC

技术参数

- 1. 额定电流:50mA 12V DC
- 2. 接触电阻:100毫欧
- 3. .行程:0.25±0.05mm
- 4. 绝缘电阻:100兆欧
- 5. 耐电压:250v 50Hz 1Min

注：“*”表示关键尺寸(4个).

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-T1212M		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D		DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK				APPD.		ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH							