



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

- a.HOUSING:PA66 UL94V-0
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Ni100u"-120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -55°C~ +105°C


ORDERING INFORMATION

电池座系列

DIP 90° TYPE

PLATING:
A-Au10u"
J-Ni100u"-120u"
K-Sn100u"-120u"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

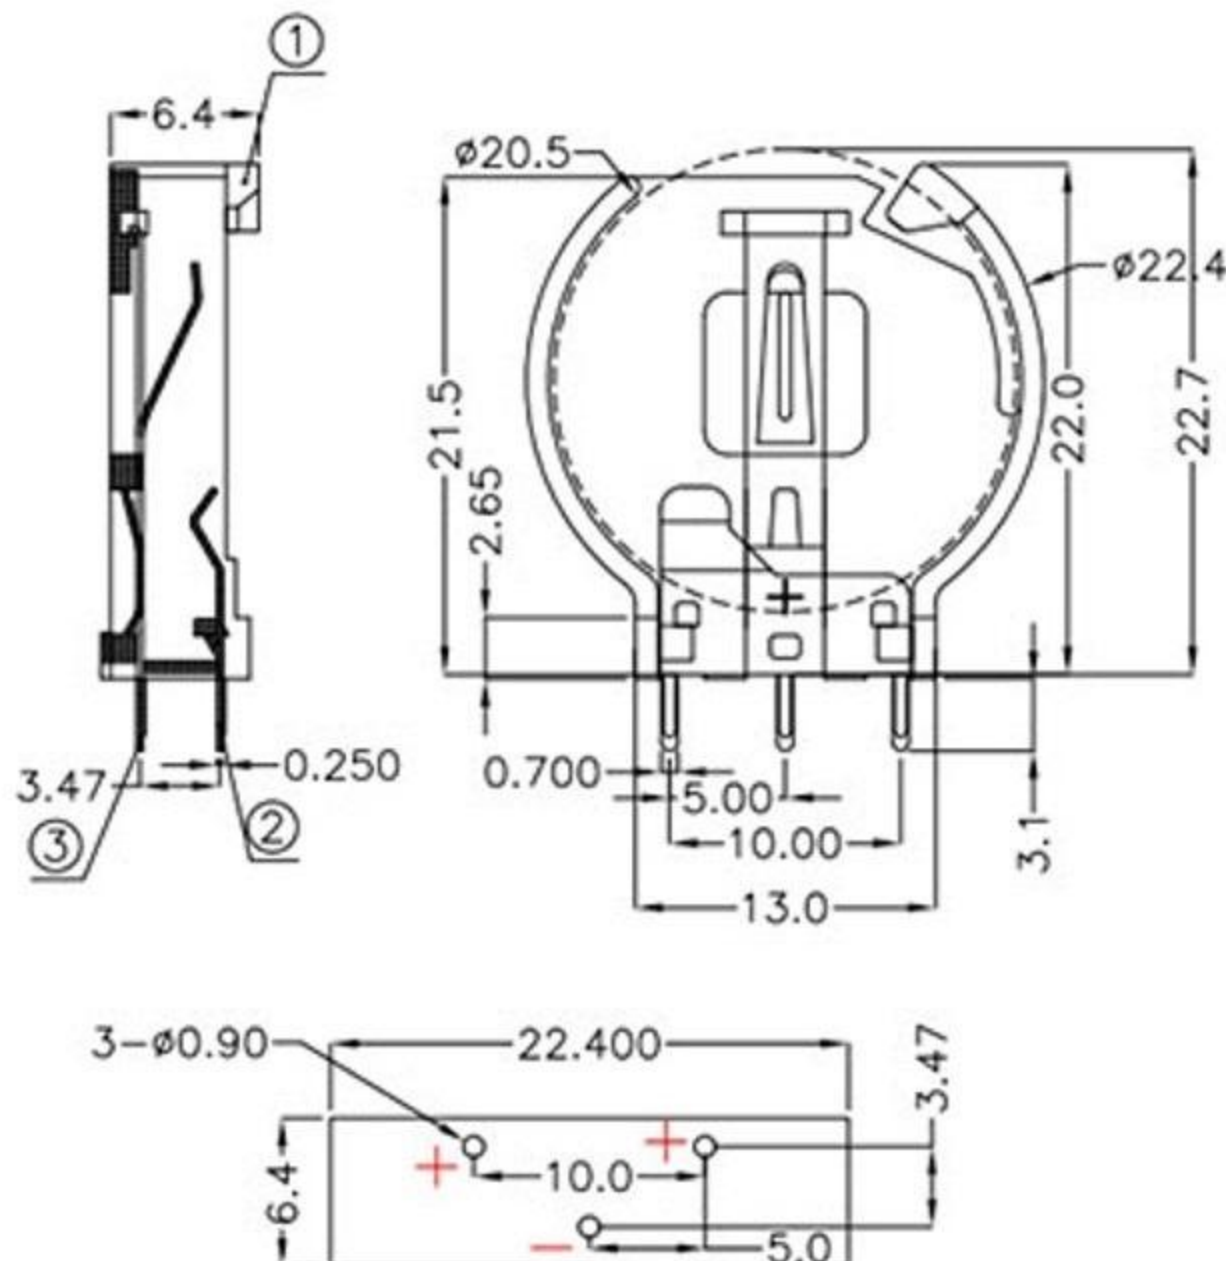

PCB Layout Diagram
Top View

UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:	ANGLES:	DSND	DATE	2017-07-16	TITLE:
X ±0.30	X ±1°	CHKD	DATE	2017-07-16	
XX ±0.25	XX ±0.5°	APVD	DATE	2017-07-16	PART NO.:
XXX ±0.20		SCALE: 2:1	SIZE: A4	VIEW: ④	
XXX ±0.10		UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.
WEIGHT: 1.7g					
SHEET 1 OF 1					

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.25MM	NI-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.25MM	NI-Plating
1	HOUSING	1	PA66	BLACK