
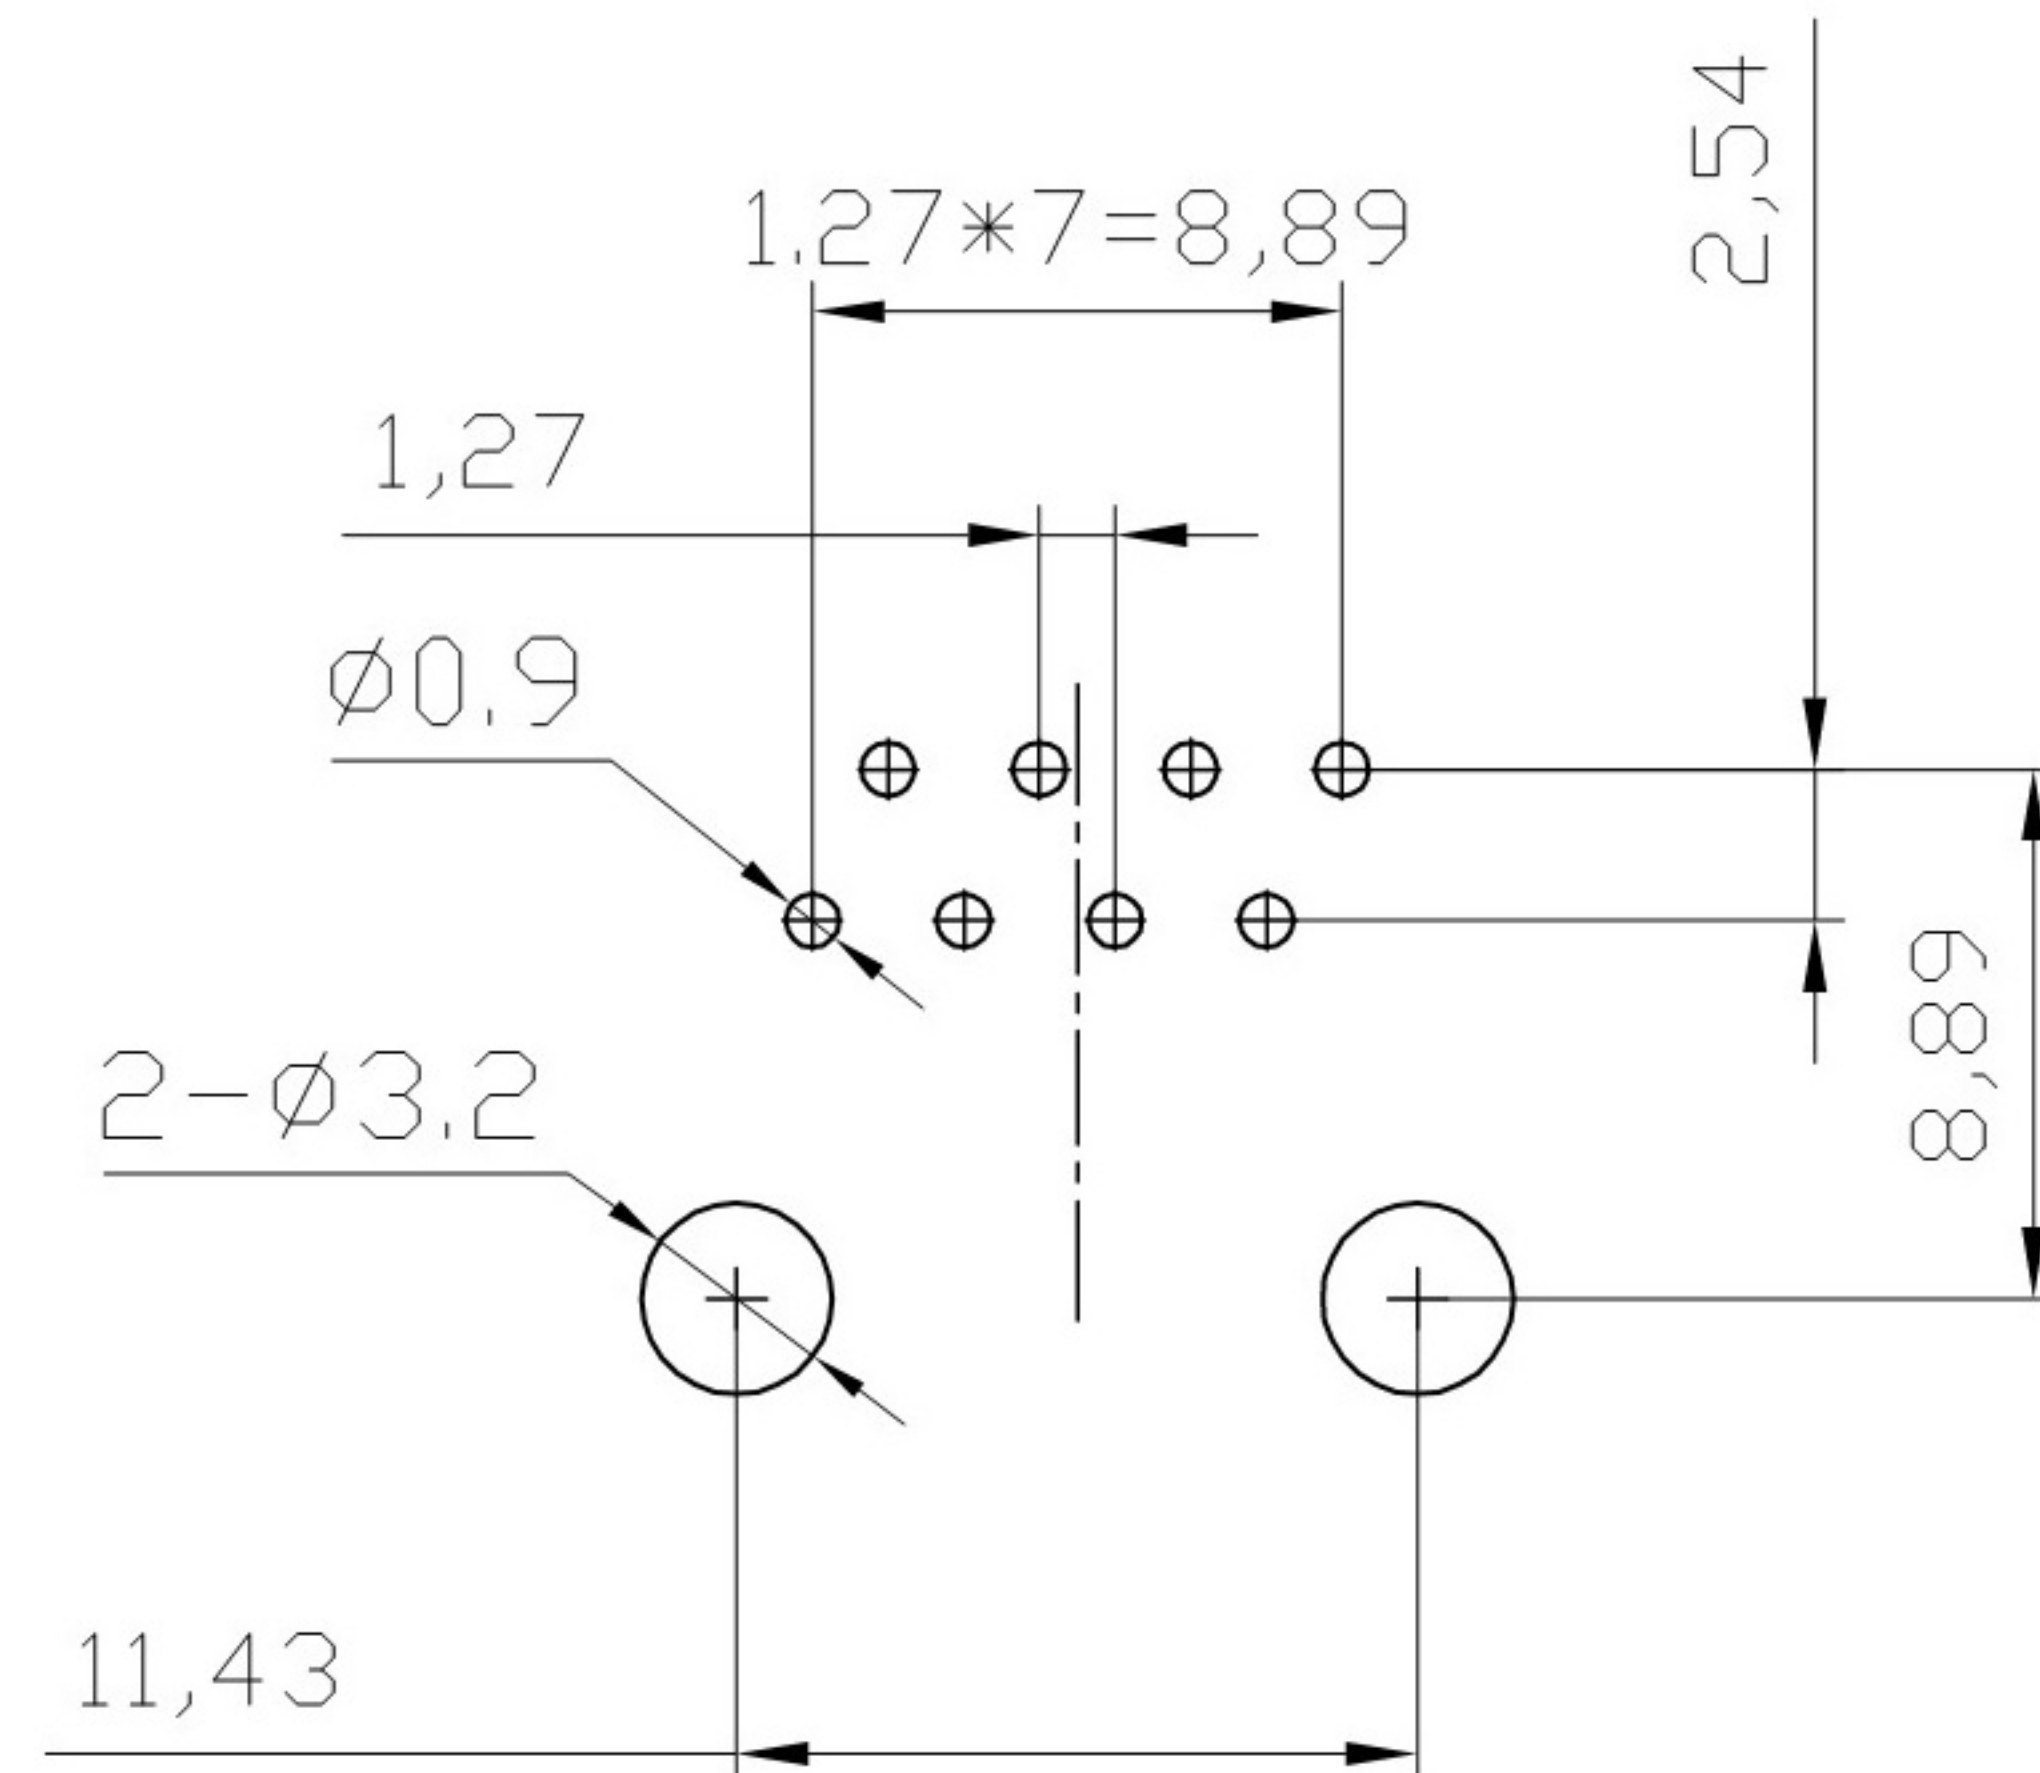
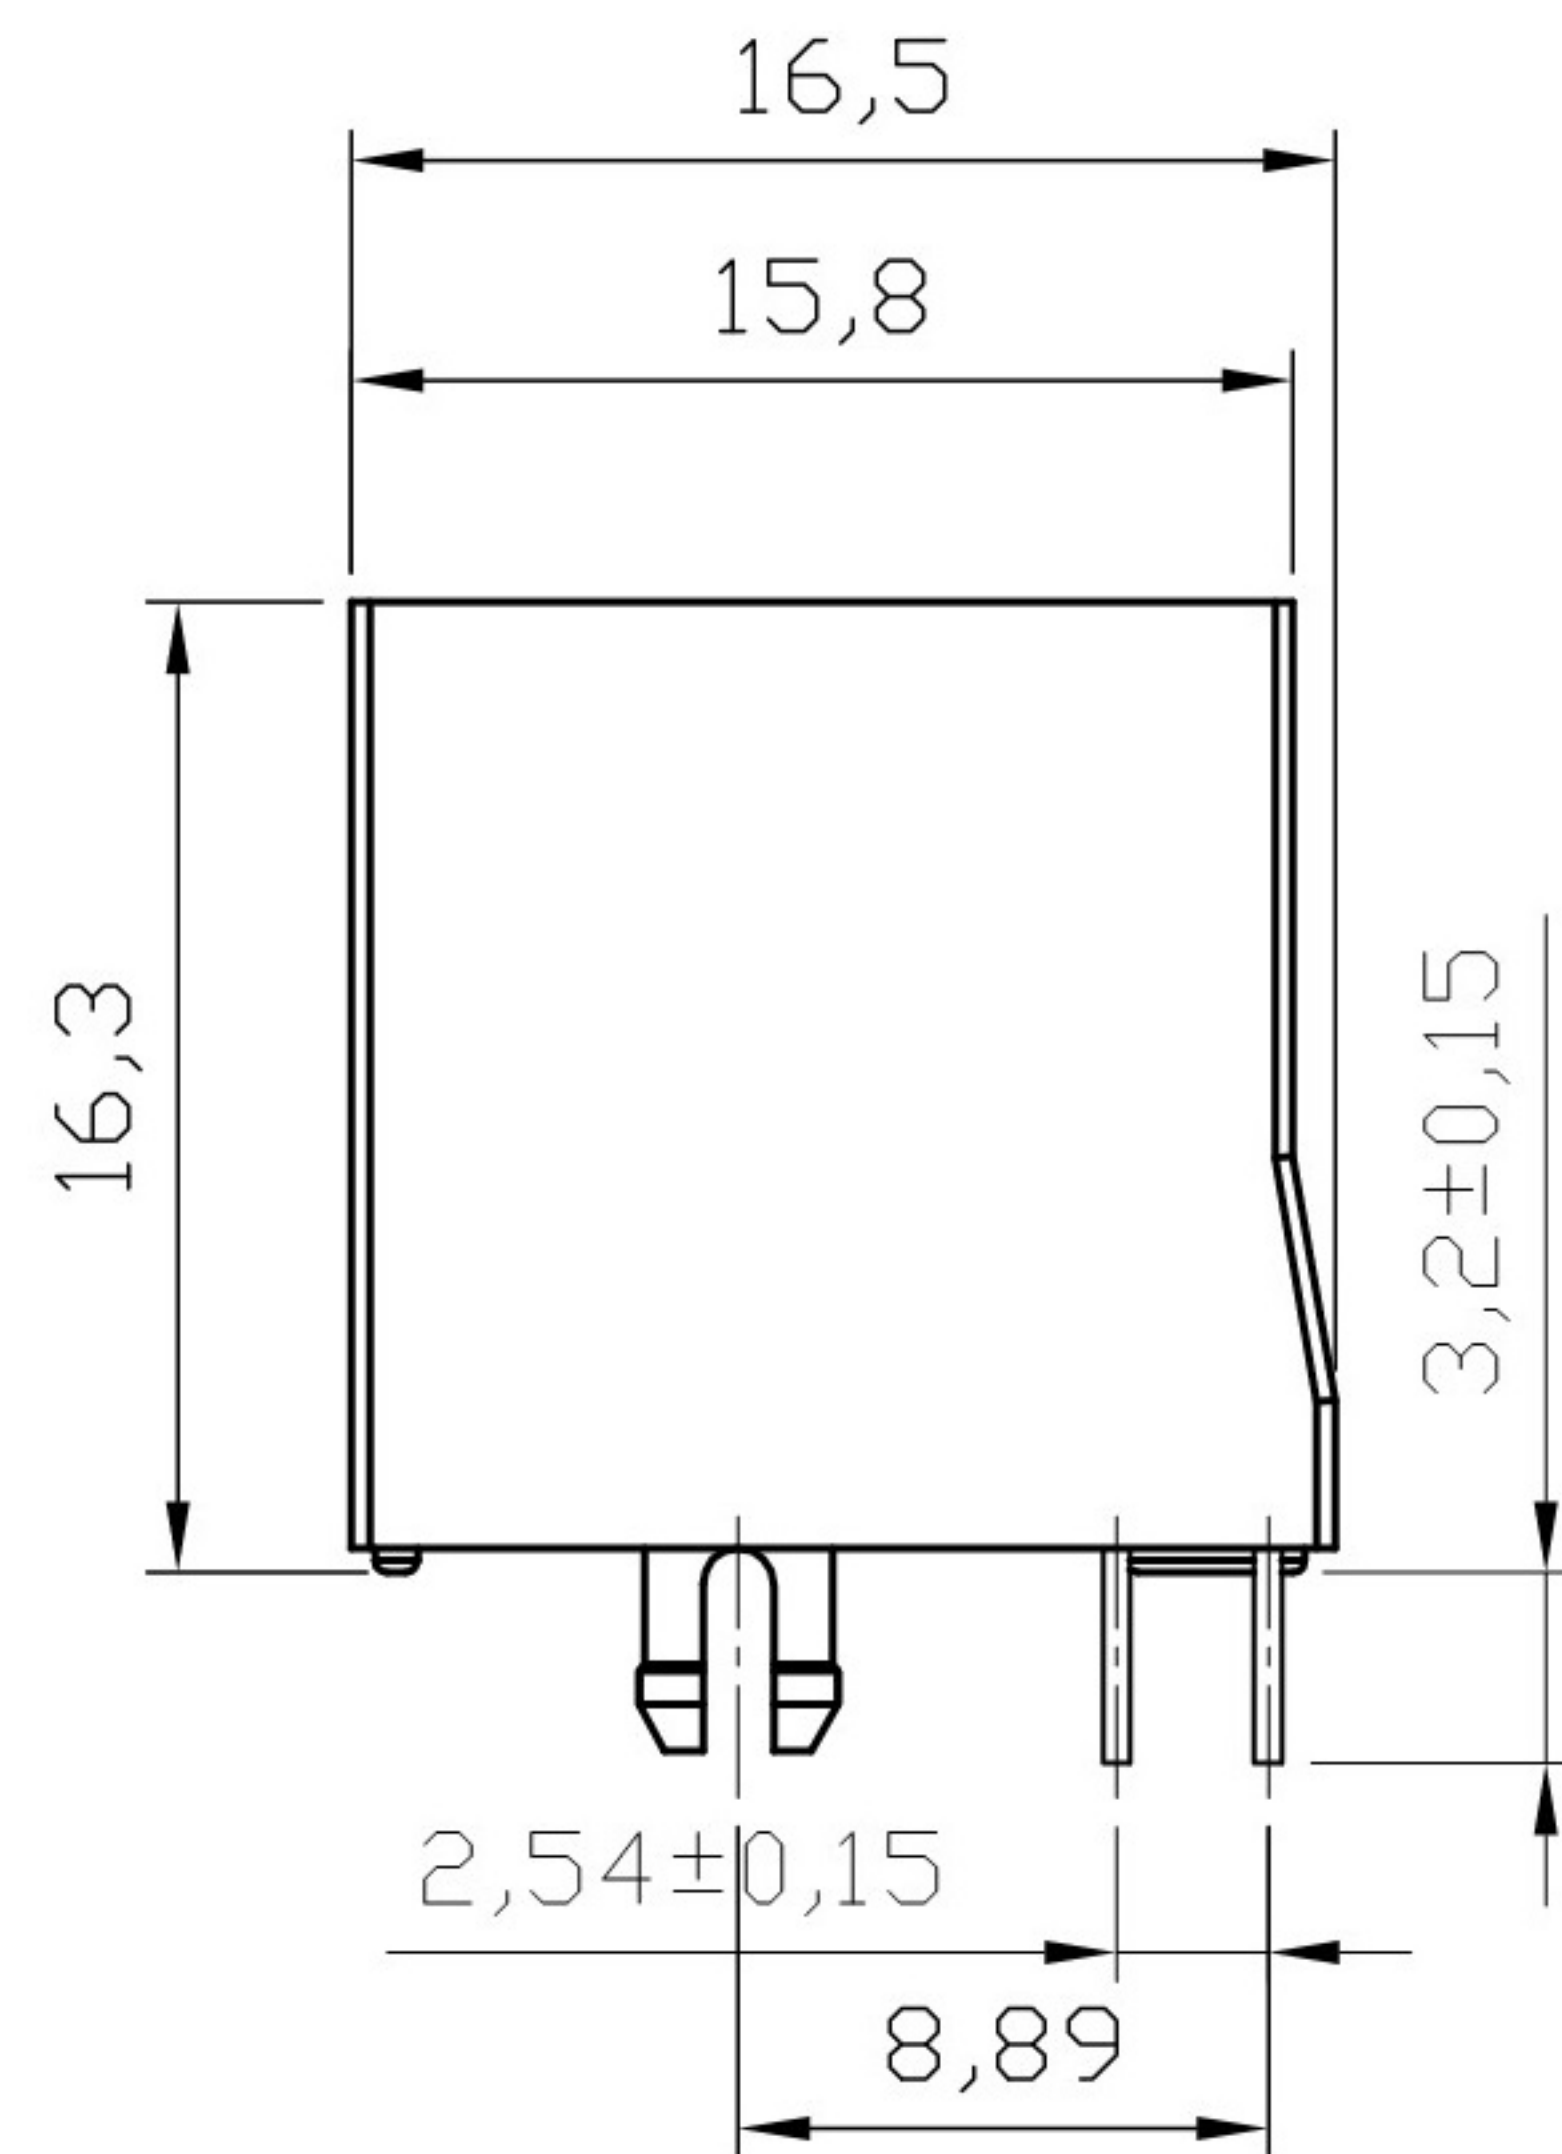
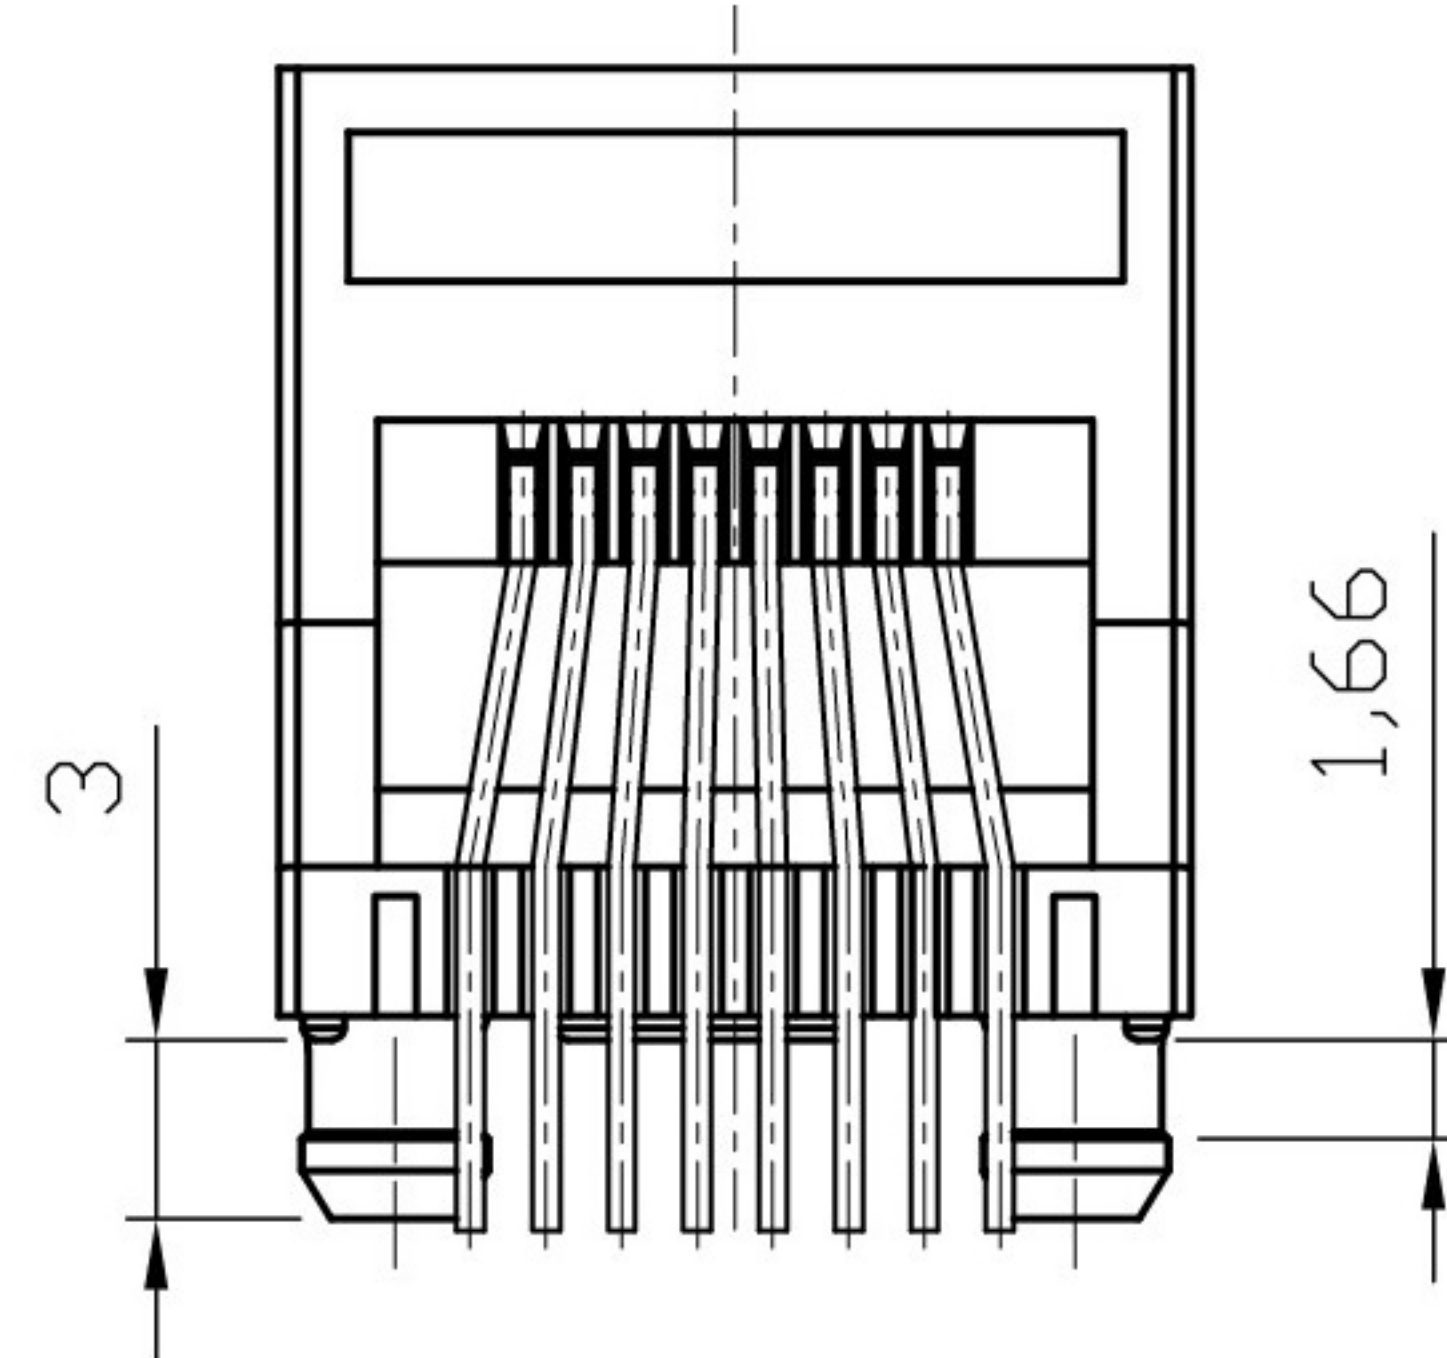


RoHS

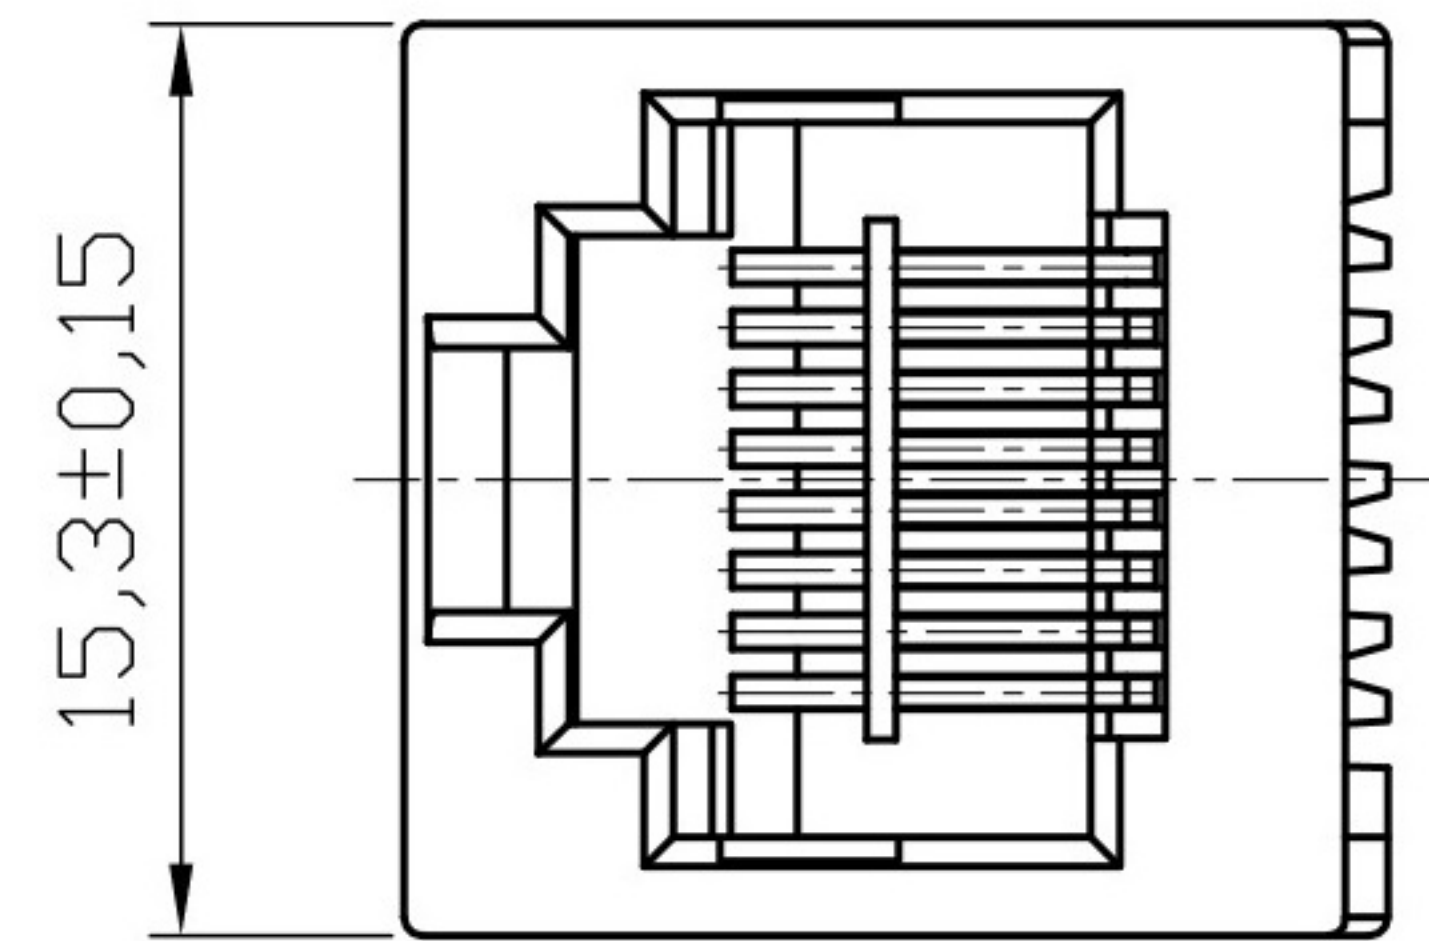

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi=0.46\text{mm}$.
3. PLATING : GOLD PLATING $3\mu\sim50\mu$ OVER NICKEL

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC WITHSTANDING RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. DURRABILITY: : 750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO 85°C .
2. OPERATION : 0°C TO 70°C .

PART NUMBER:

	ZP52A	8	X - X	X	X	X	X	X
52A SERIES JACK								
POSITIONS	CONTACTS	PEG	PANEL	PLASTIC	COLOR	LOGO	GOLD PLATING	
4-4 POSITIONS	2-2 CONTACTS	1-SPLIT LONG PEG	0-W/O PANEL	1-PBT	1-BLACK	0-W/O LOGO	1-15u'	
6-6 POSITIONS	4-4 CONTACTS	2-SPLIT SHORT PEG	1-W/ PANEL	2-NYLON66	2-WHITE	1-W/ ZPY	2-3u'	
8-8 POSITIONS	6-6 CONTACTS	3-'L' PEG		3-NYLON46	3-GRAY	2-W/ UL	3-6u'	
1-10 POSITIONS	8-8 CONTACTS			4-ABS	4-IVORY	3-W/ ZPY&UL	4-15u'	
	1-10 CONTACTS						5-30u'	
							6-50u'	

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

Address: China, Dongguan City, Guangdong Province, Huang Jiang
TLE: 0769-82055138 0769-82056828
E-mail: XB@ALPSR.CN E-mail: CN@ALPSR.CN
Website: www.alpsr.cn www.alpsr.com

TITLE:
RJ45

PART NO.:

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/2

UNITS
MM[INCH]

REV
A0

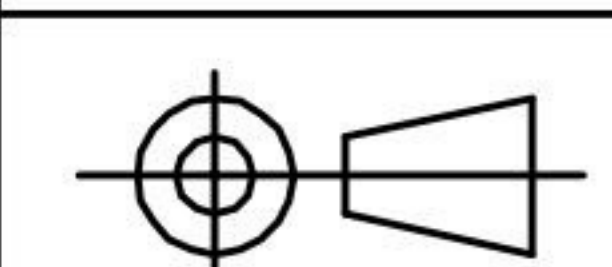

GENERAL TOLERANCES
UNLESS SPECIFIED

$x\pm0.35$	$x^{\circ}\pm3.0^{\circ}$
$.x\pm0.30$	$.x^{\circ}\pm2.0^{\circ}$
$.xx\pm0.25$	$.xx^{\circ}\pm1.5^{\circ}$
$.xxx\pm0.10$	$.xxx^{\circ}\pm1.0^{\circ}$

APPROVED BY:
JP.Gong

CHECKED BY:
TW.Xu

DESIGND BY:
ZG.Hu