
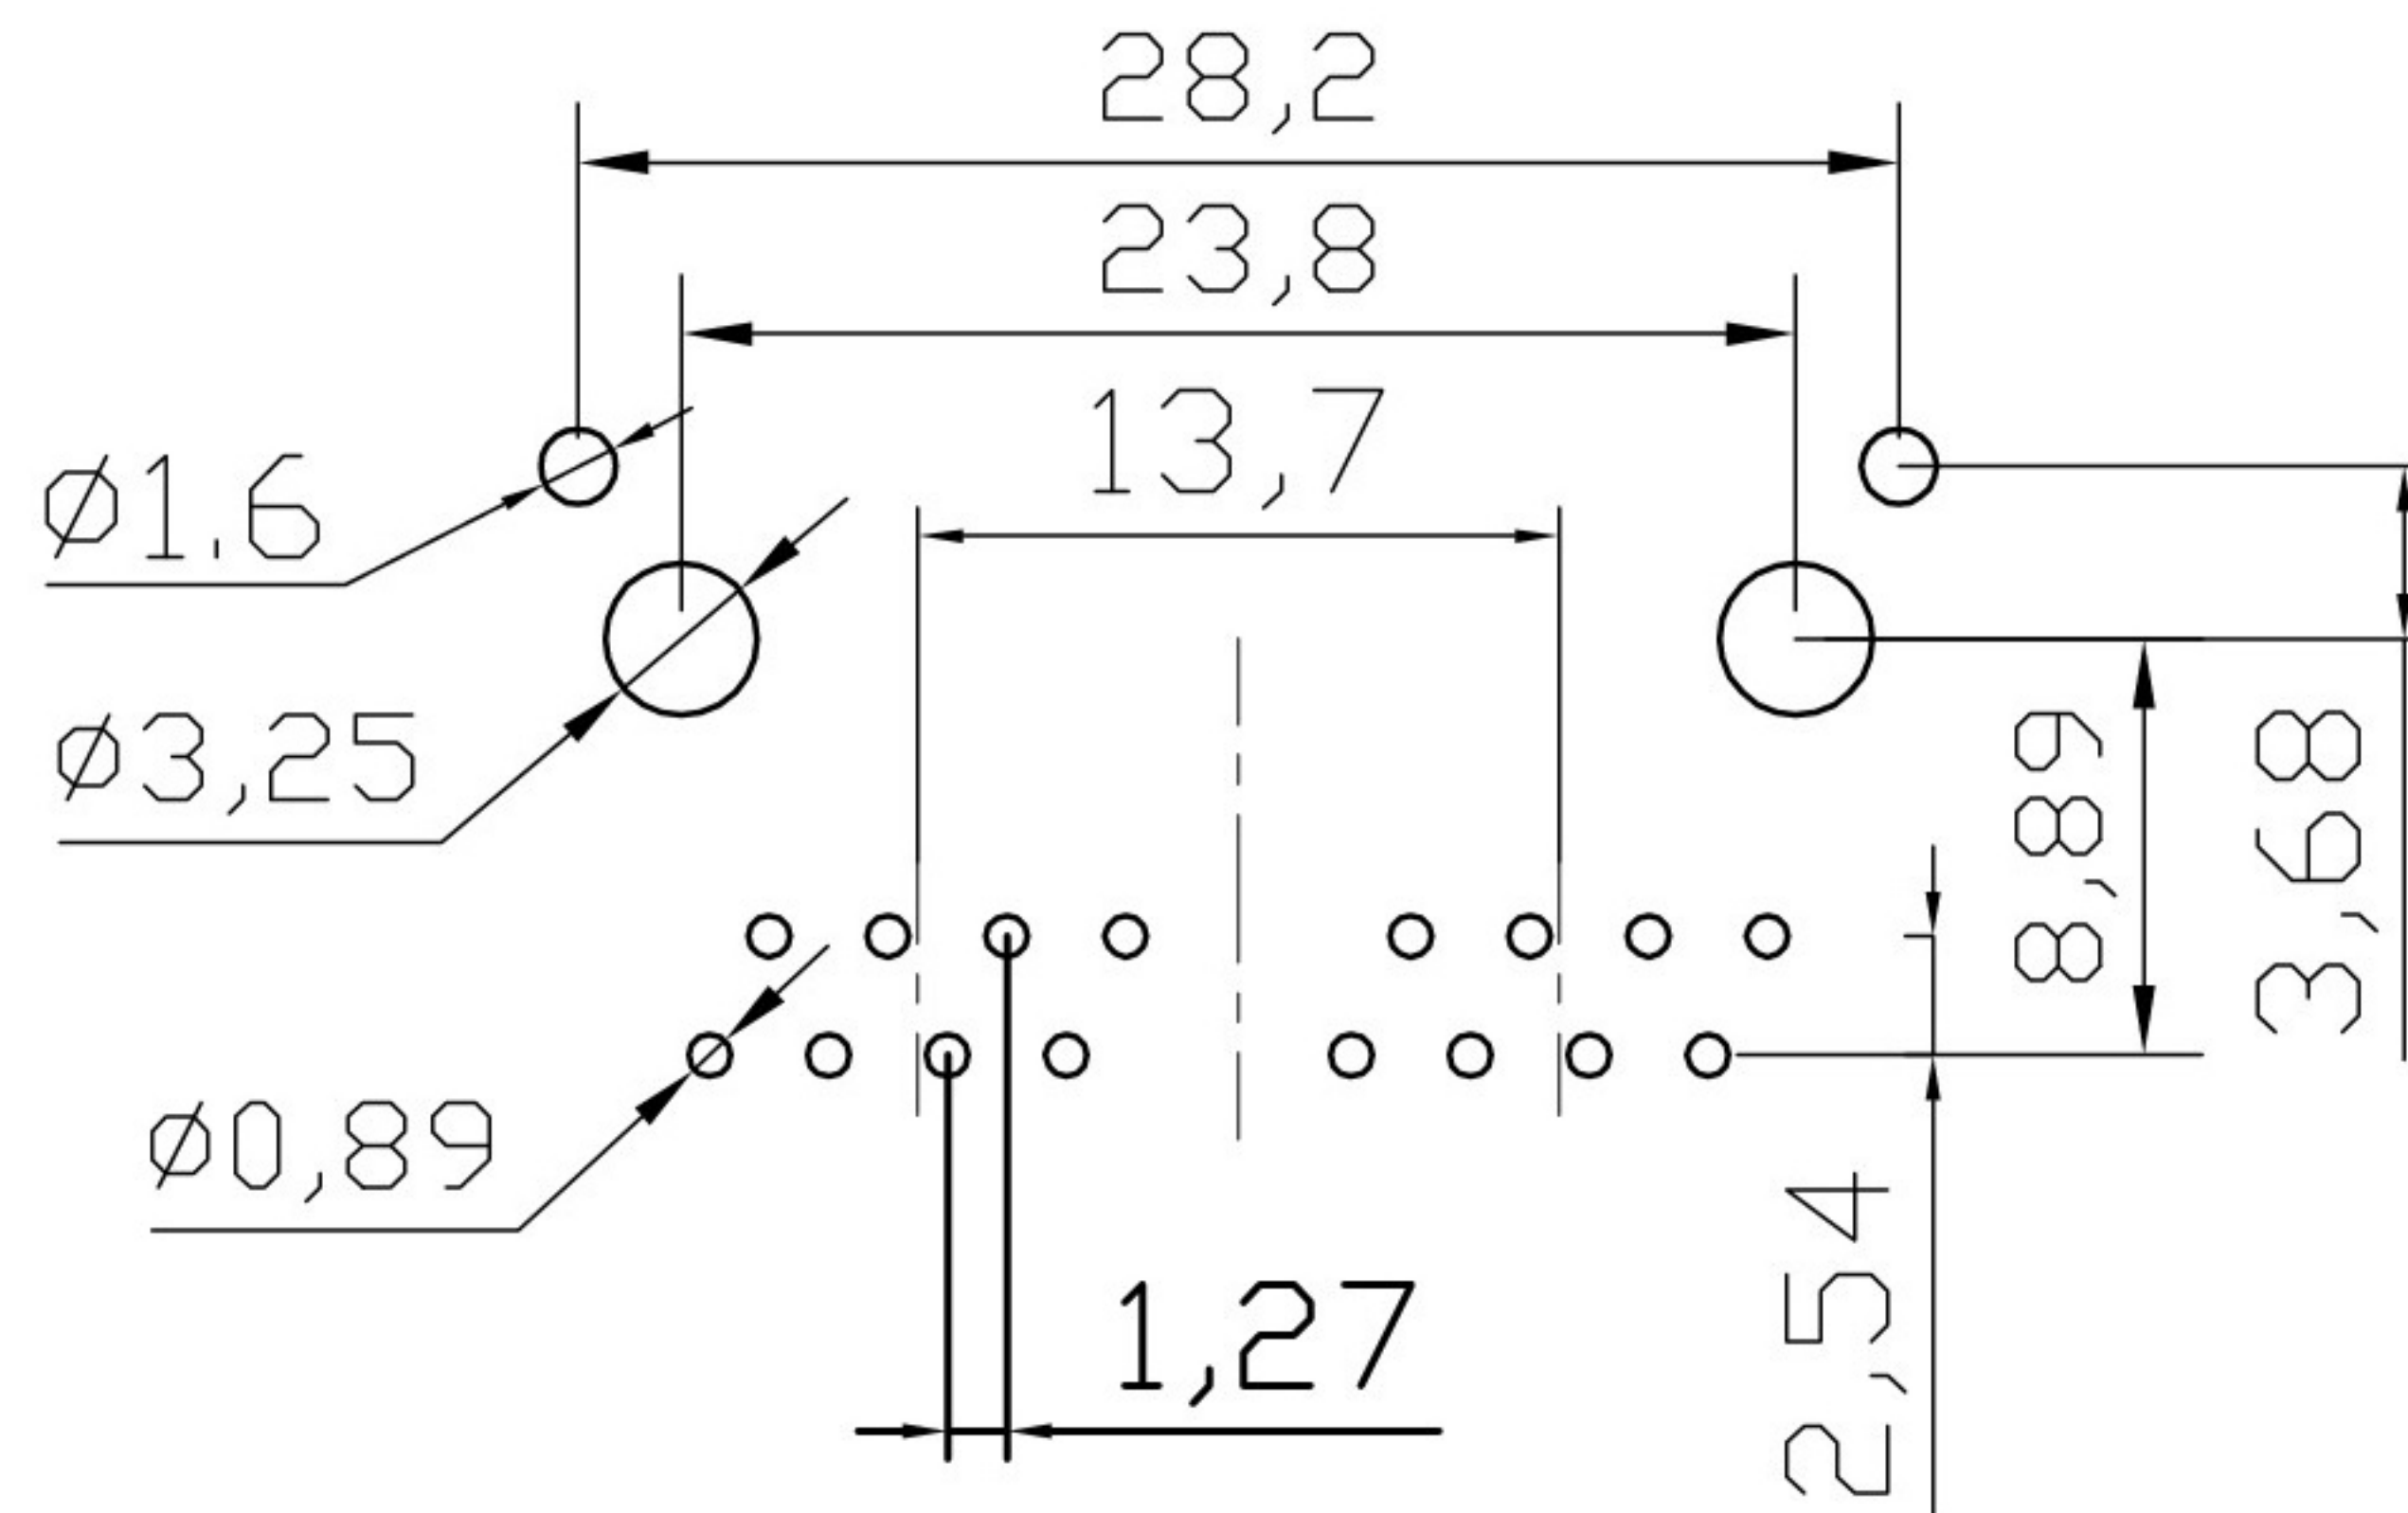
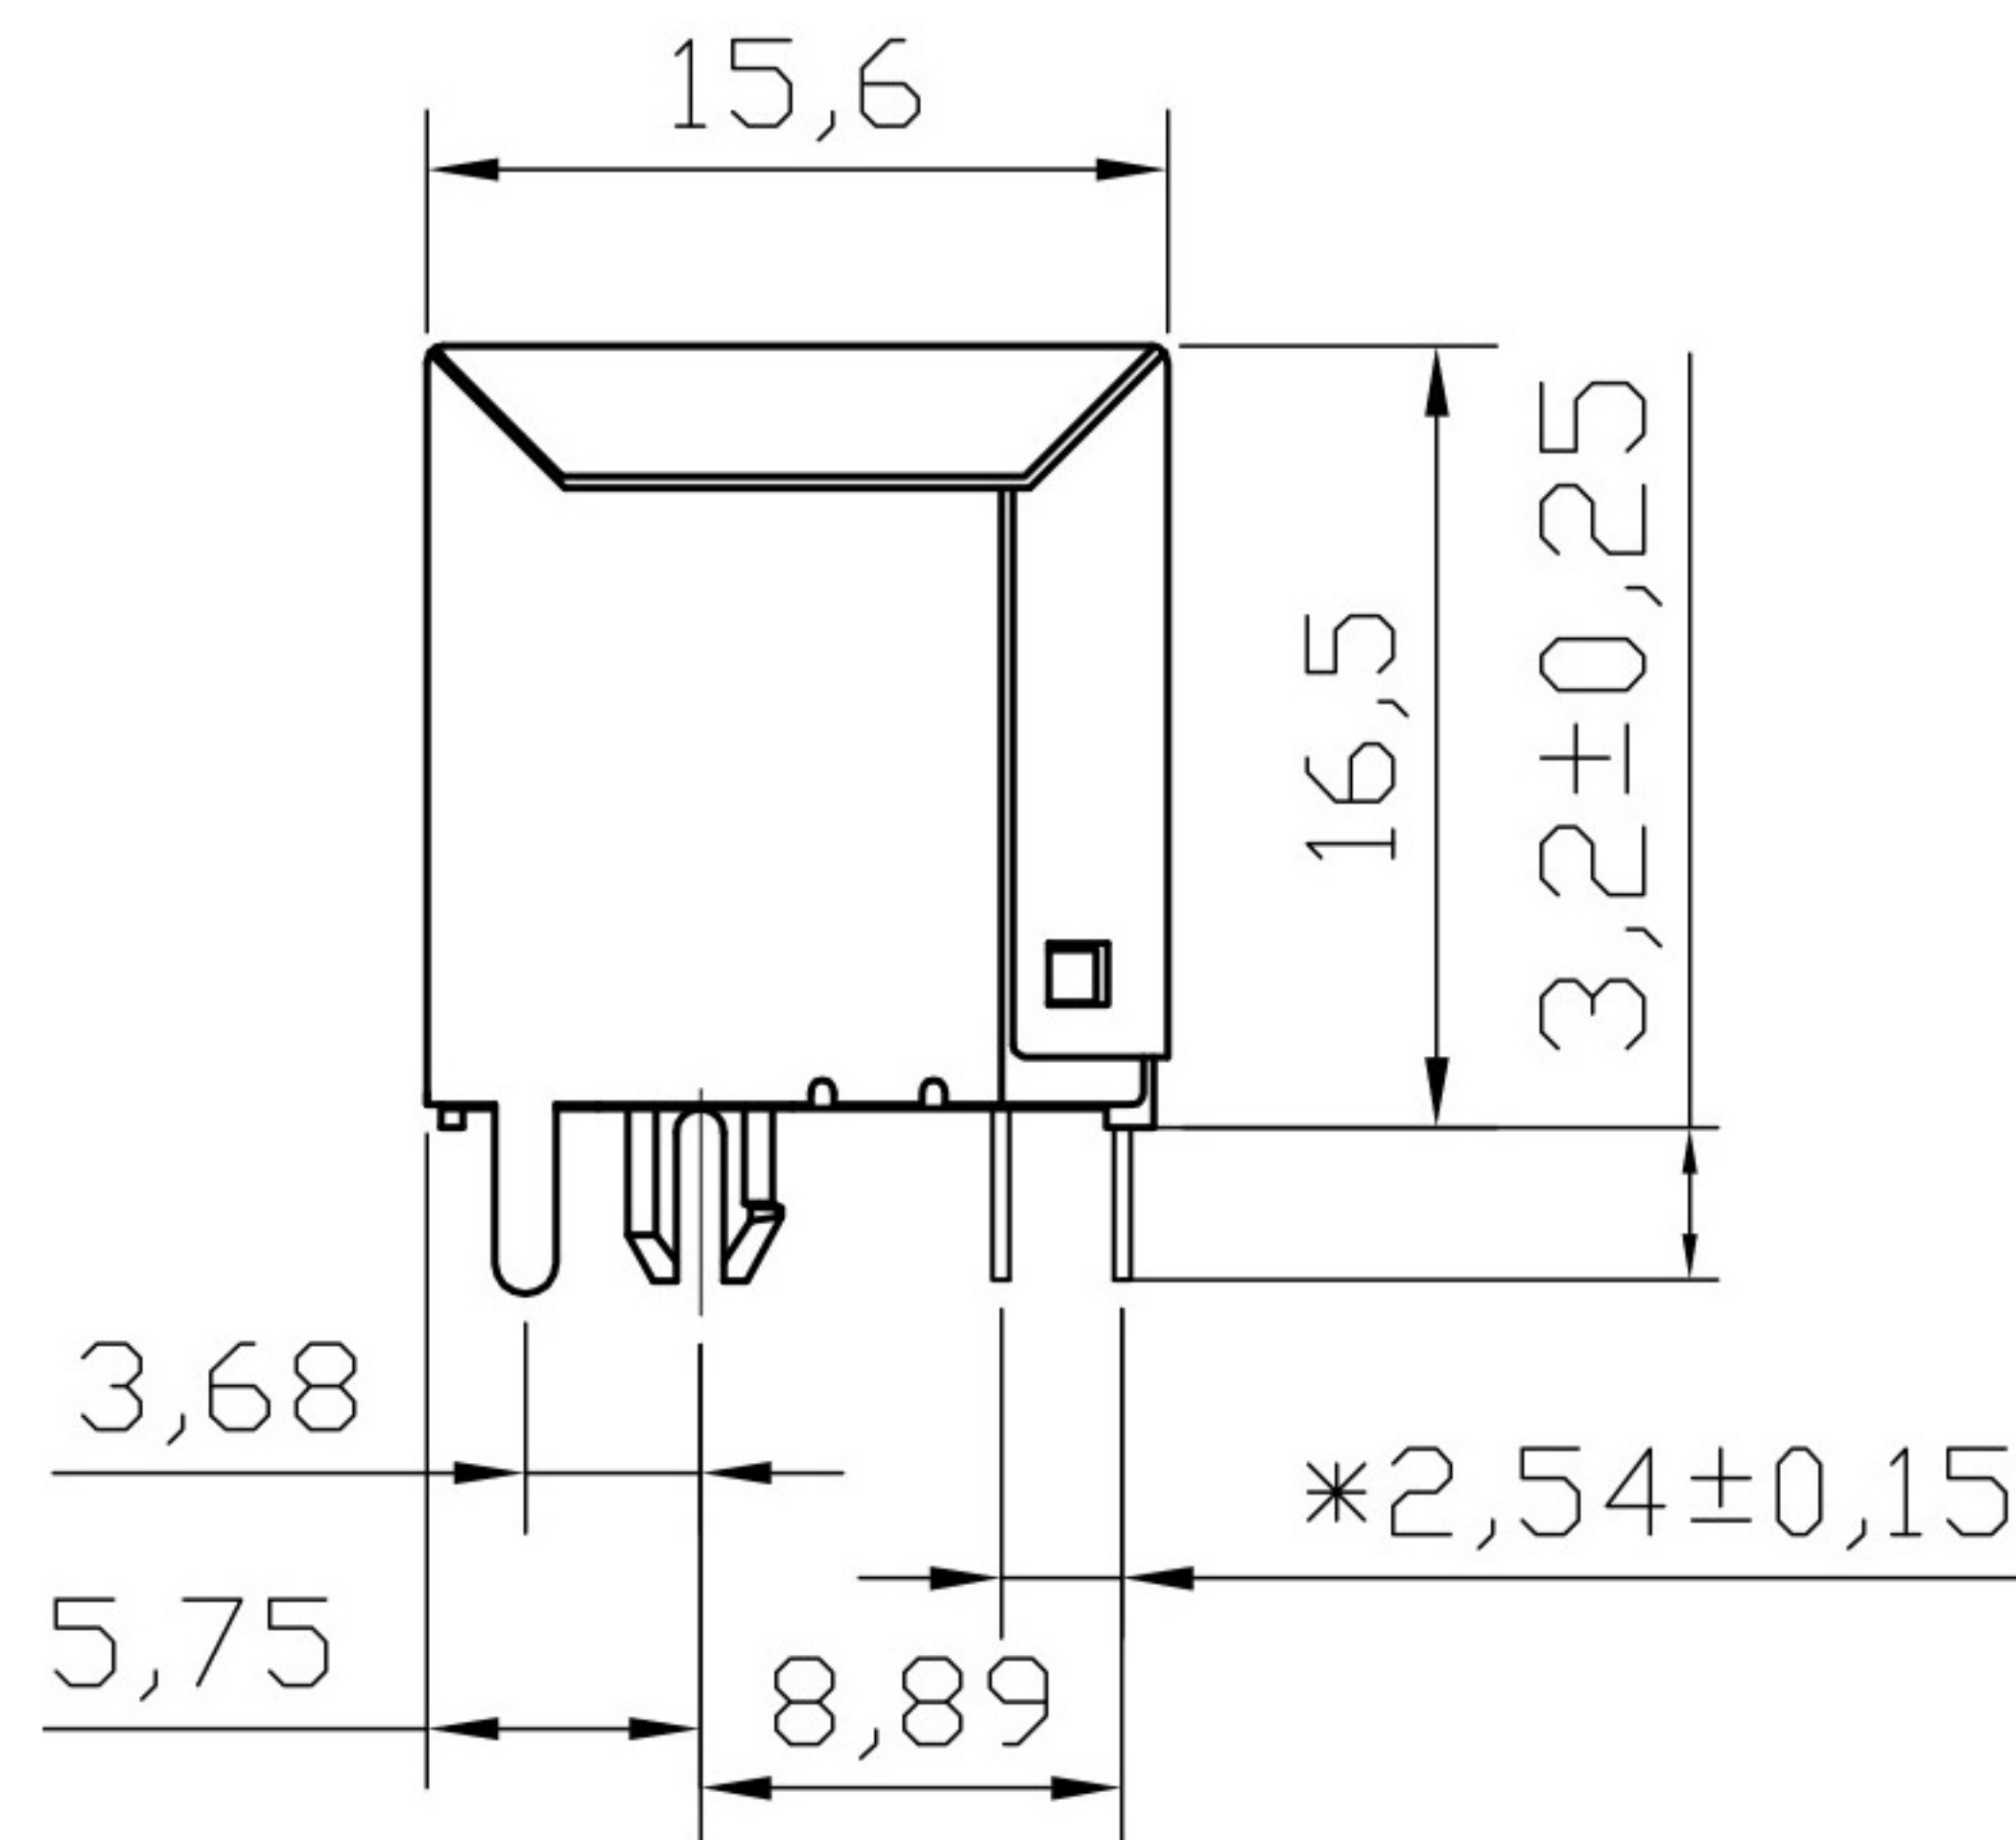
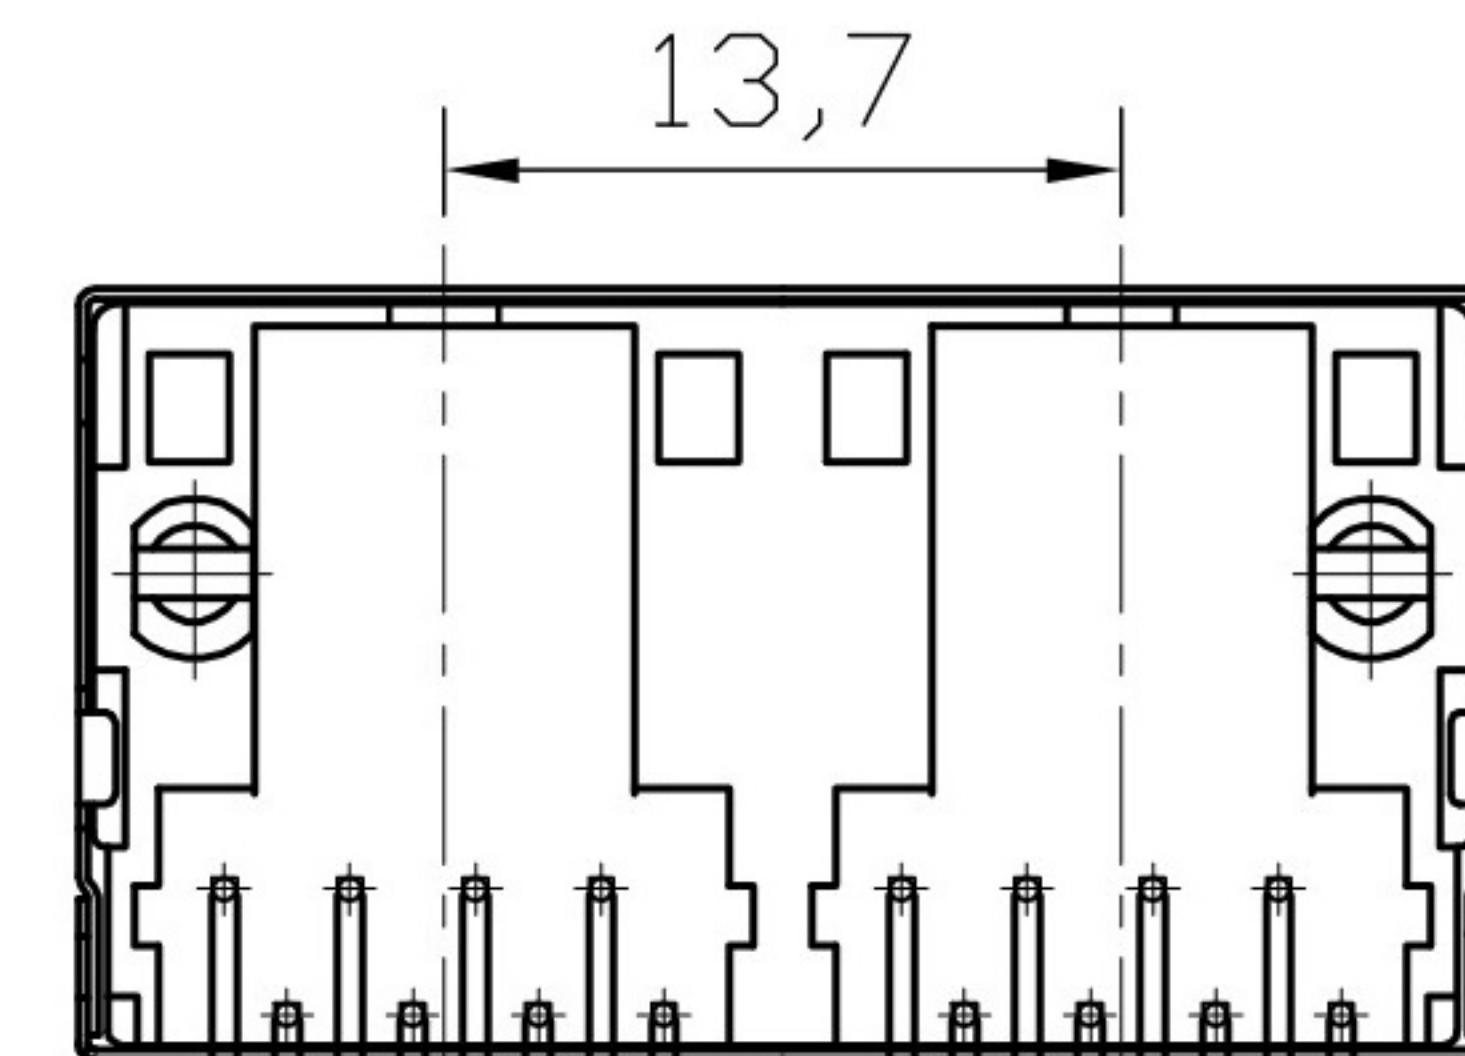
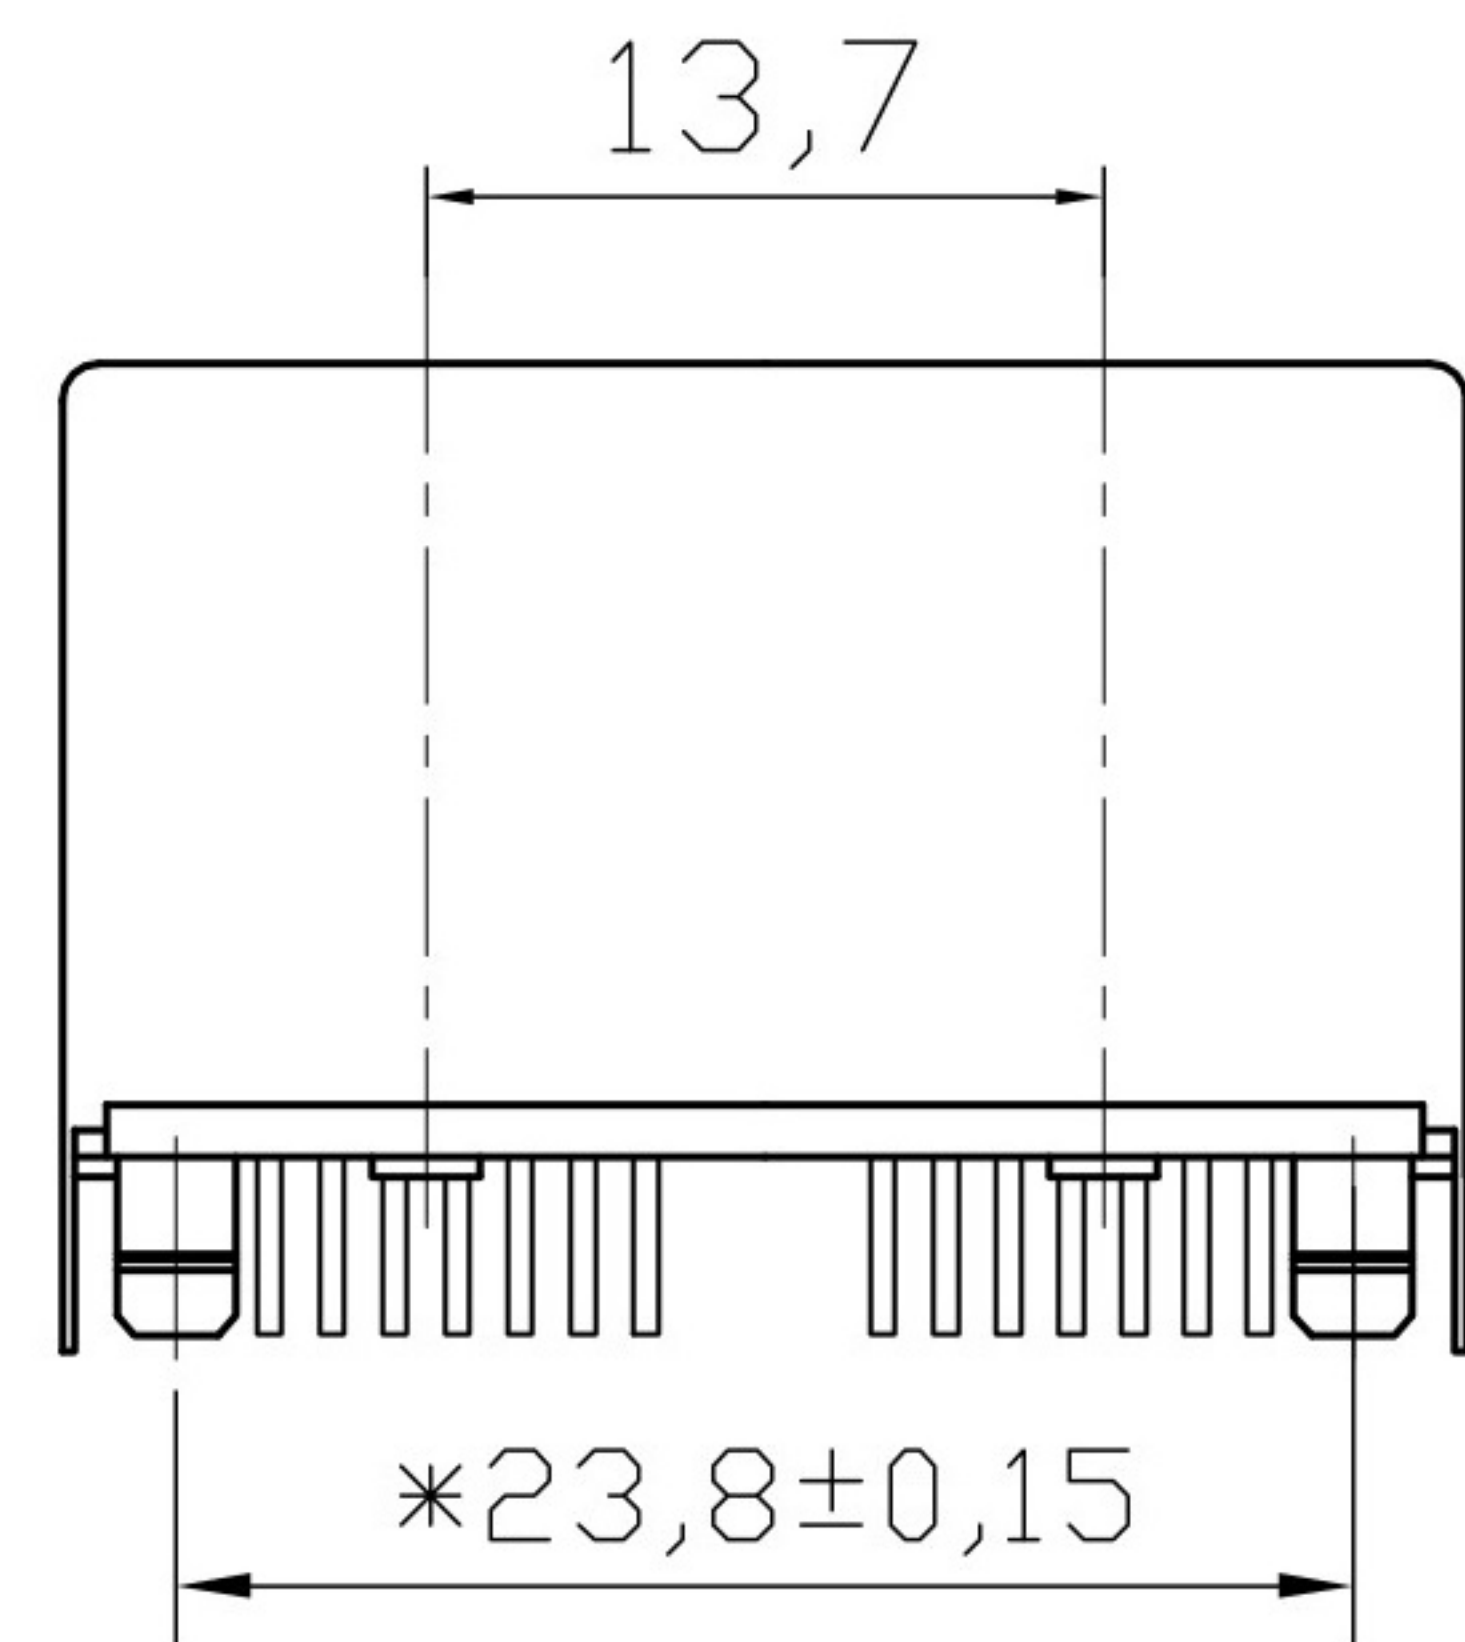


RoHS

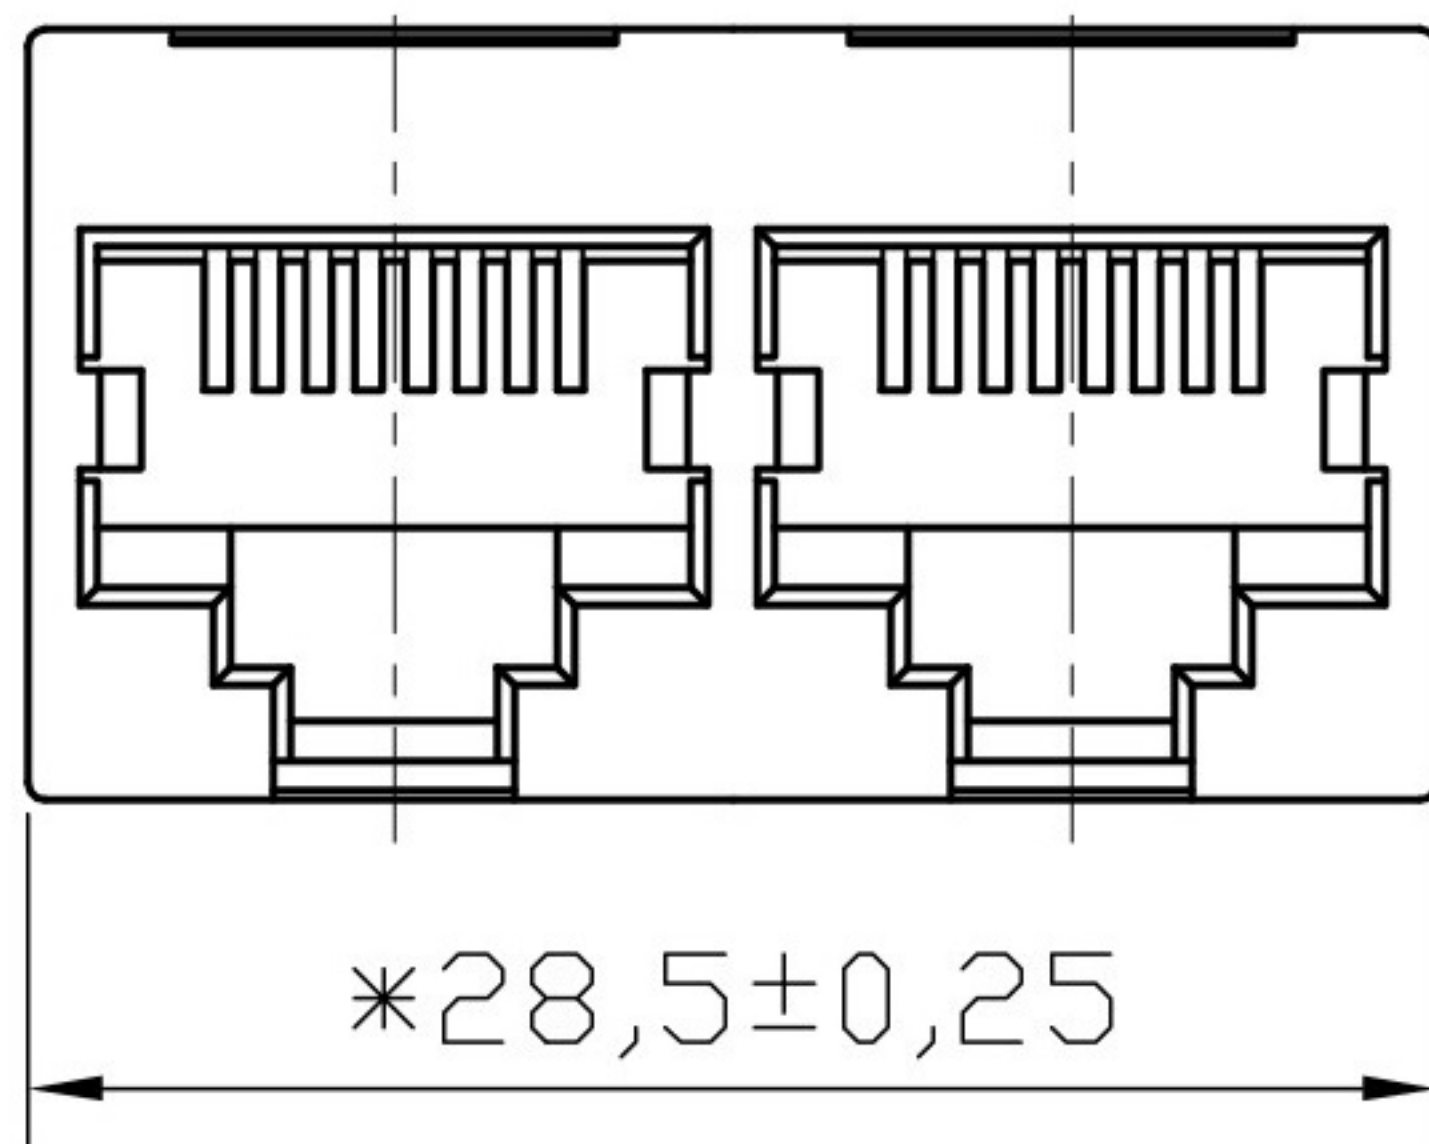

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

1. HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL :PHOSPHOR BRONZE $\phi=0.46\text{mm}$.
3. PLATING :SELECTING GOLD PLATING $3\mu\sim 50\mu$ OVER NICKEL

ELECTRICAL:

1. VOLTAGE RATING :125 VAC RMS.
2. CURRENT RATING :1.5 AMP.
3. CONTACT RESISTANCE :30 MILLIOHMS MAX.
4. INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. DURRABILITY: :750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40° C TO 85° C.
2. OPERATION : 0° C TO 70° C.

PART NUMBER:

52E SERIES JACK		ZP52E	X	X - X	X	X	X	X	X	X
POSITIONS	CONTACTS	PORTS	SHIELD	PEG/TAB	PLASTIC	COLOR	LOGO	GOLD PLATING		
4-4 POSITIONS 6-6 POSITIONS 8-8 POSITIONS	2-2 CONTACTS 4-4 CONTACTS 6-6 CONTACTS 8-8 CONTACTS	1-1PORTS 2-2PORTS 4-4PORTS 5-5PORTS 6-6PORTS 8-8PORTS	0-W/O SHIELD 1-W/ SHIELD	0-W/O PEG 1-FRONT 3.05 2-FRONT 3.68 3-FRONT 4.57 4-BACK 3.05	1-PBT 2-NYLON66 3-NYLON46 4-ABS	1-BLACK 2-WHITE 3-GRAY 4-IVORY	0-W/O LOGO 1-W/ ZPY 2-W/ UL 3-W/ ZPY&UL	1-15u' 2-3u' 3-6u' 4-15u' 5-30u' 6-50u'		

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

Address: China, Dongguan City, Guangdong Province, Huang Jiang
TLE: 0769-82055138 0769-82056828
E-mail: XB@ALPSR.CN E-mail: CN@ALPSR.CN
Website: www.alpsr.cn www.alpsr.com

TITLE:
RJ45

PART NO.:

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/2

UNITS
MM[INCH]

REV
A0

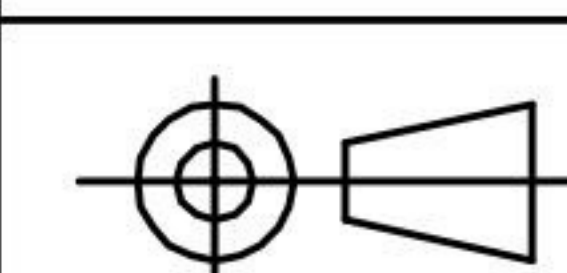

GENERAL TOLERANCES
UNLESS SPECIFIED

$x\pm 0.35$	$x^{\circ}\pm 3.0^{\circ}$
$.x\pm 0.30$	$.x^{\circ}\pm 2.0^{\circ}$
$.xx\pm 0.25$	$.xx^{\circ}\pm 1.5^{\circ}$
$.xxx\pm 0.10$	$.xxx^{\circ}\pm 1.0^{\circ}$

APPROVED BY:
JP.Gong

CHECKED BY:
TW.Xu

DESIGND BY:
ZG.Hu