
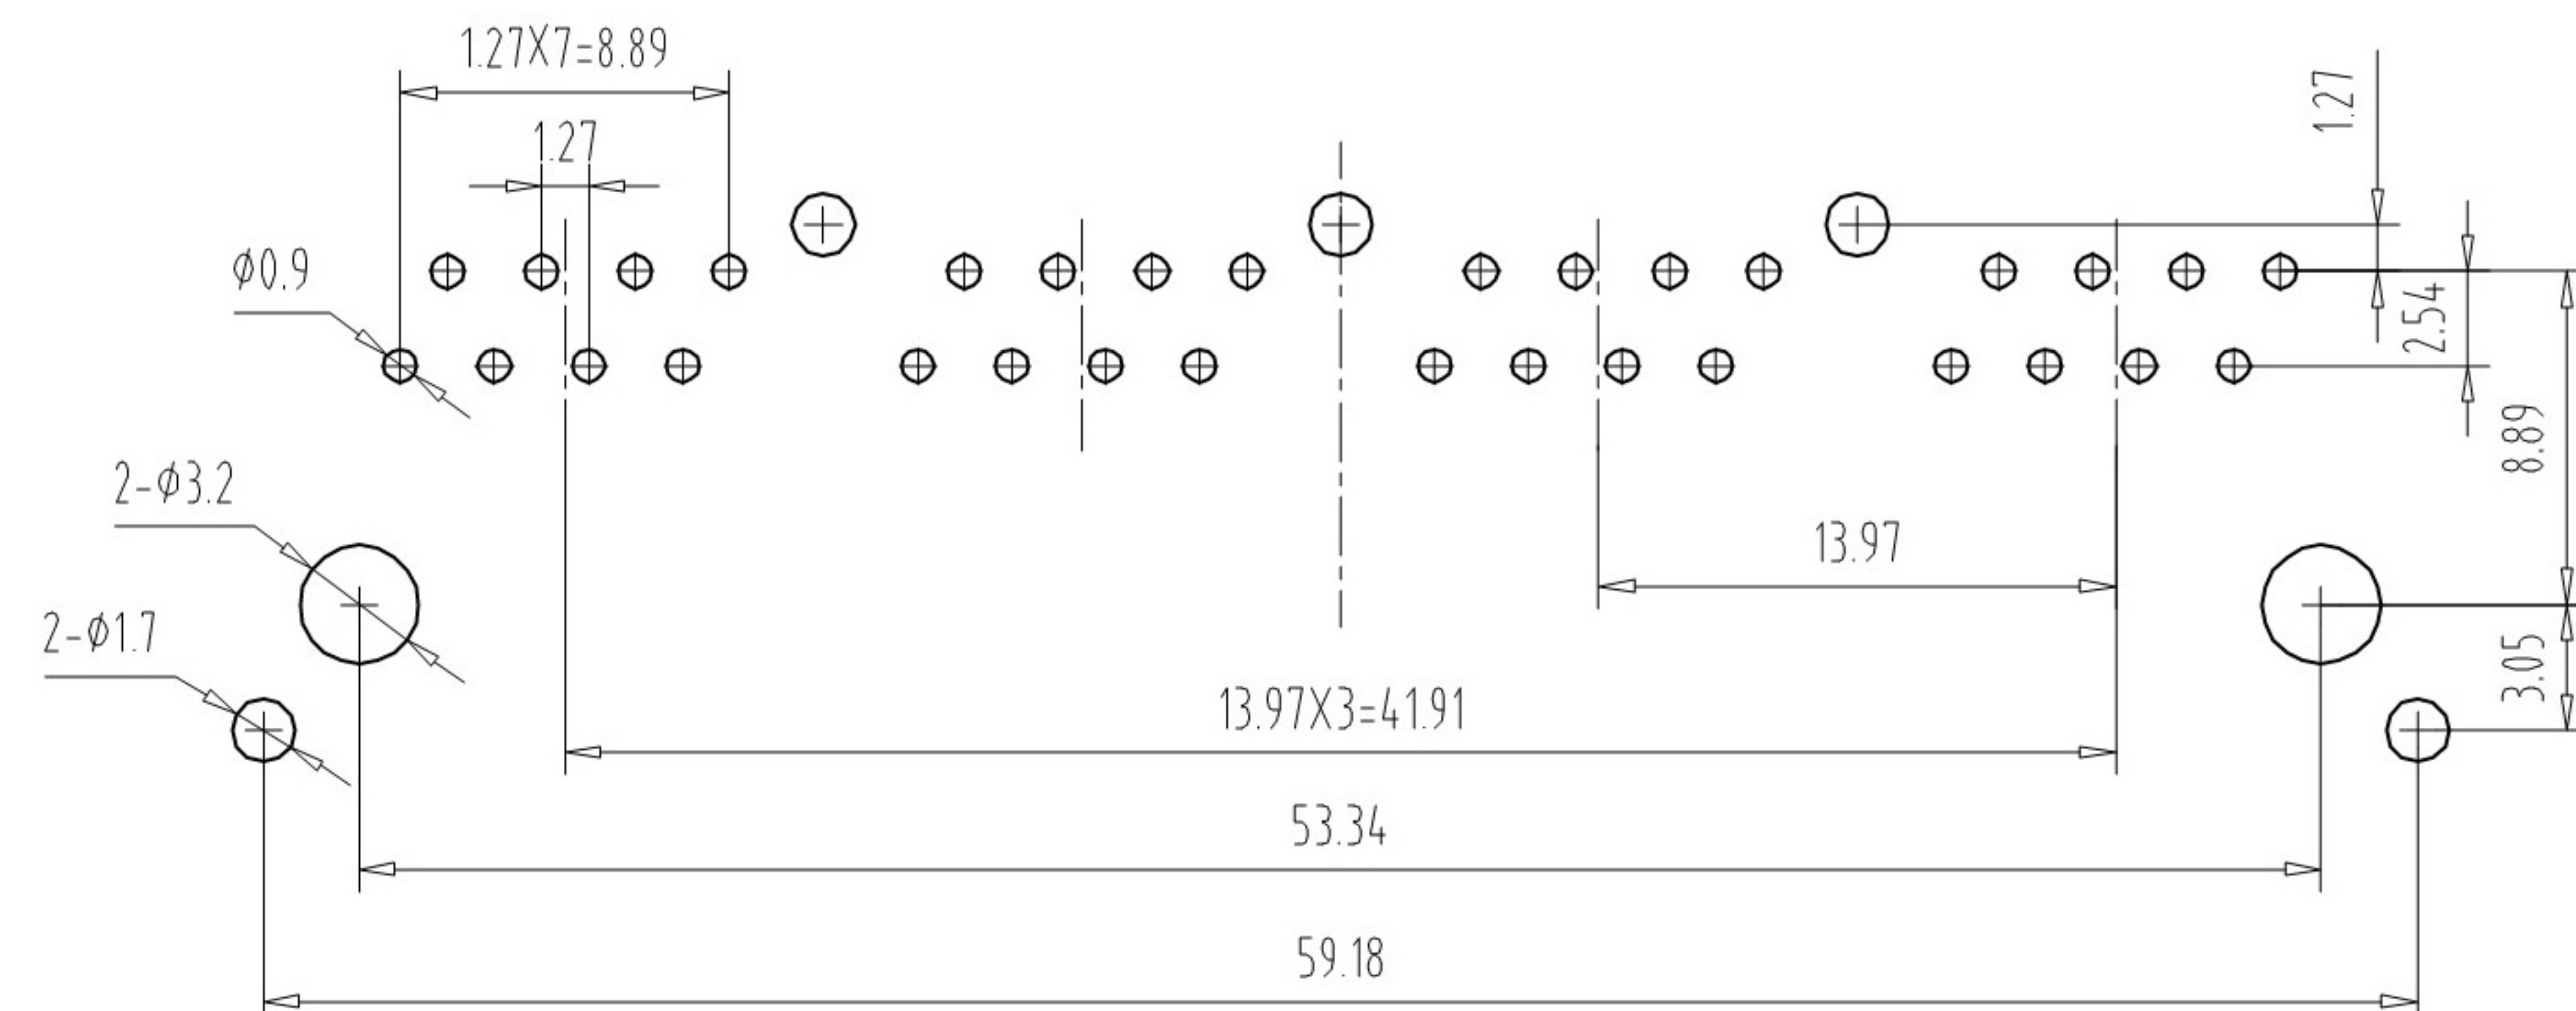
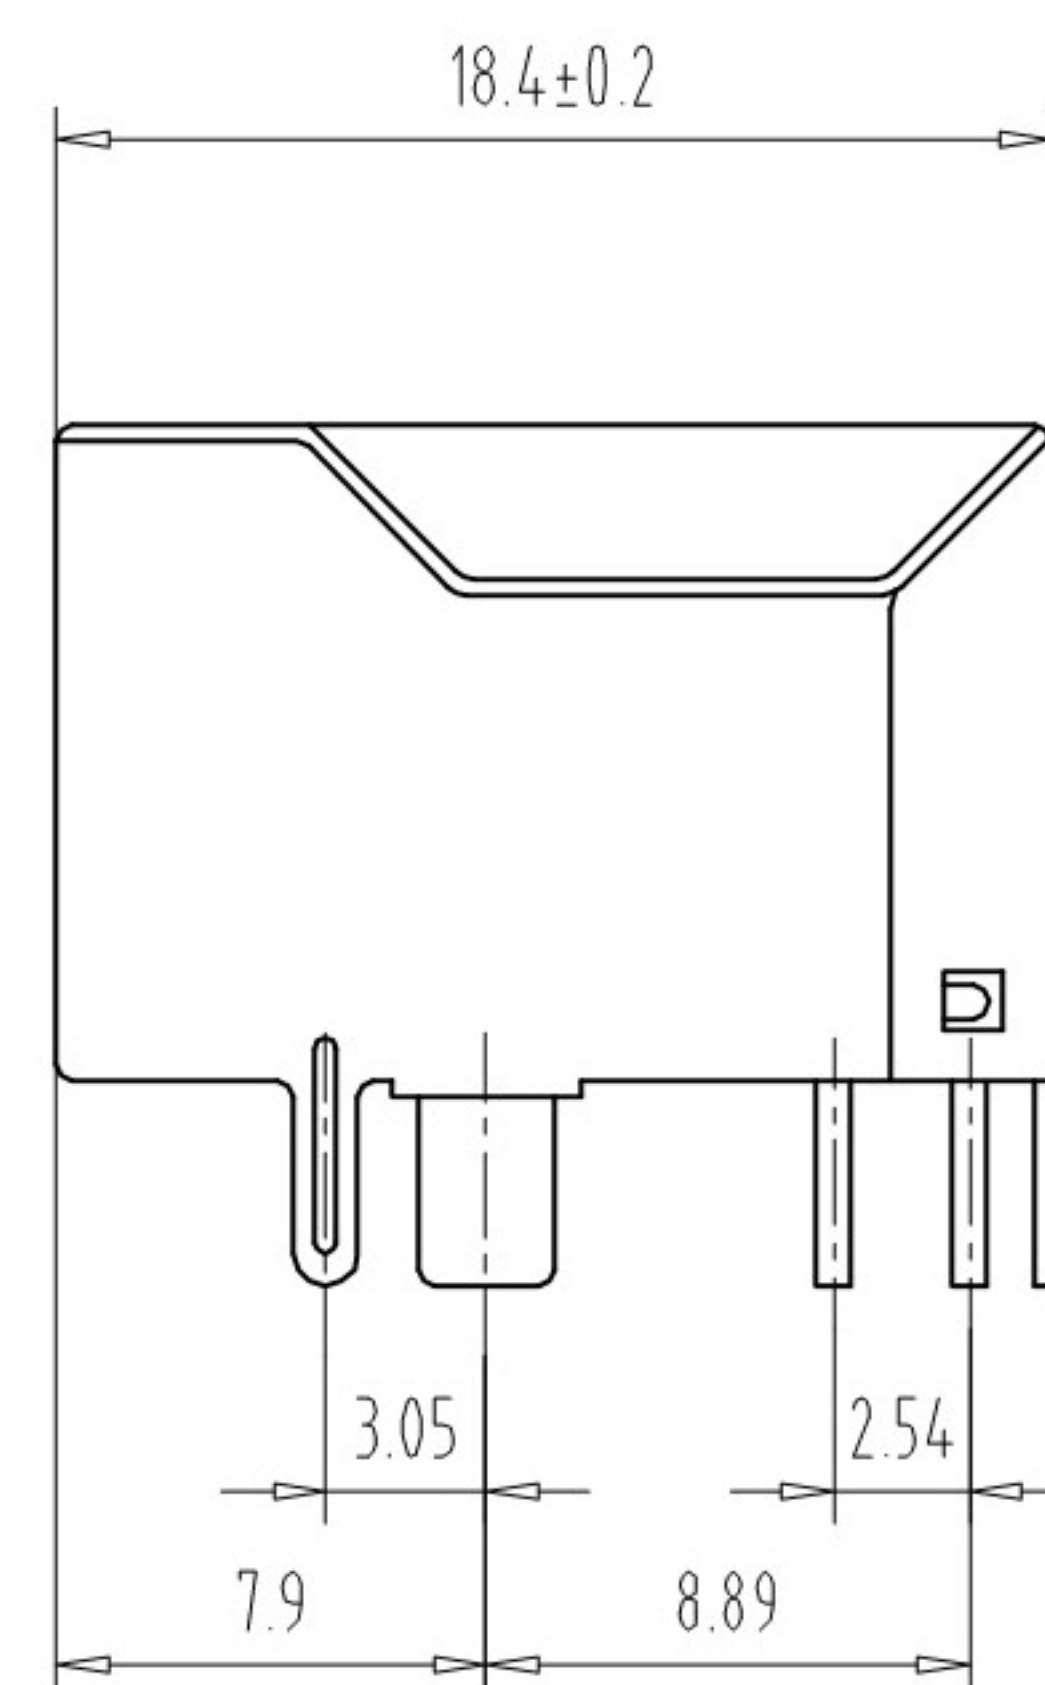
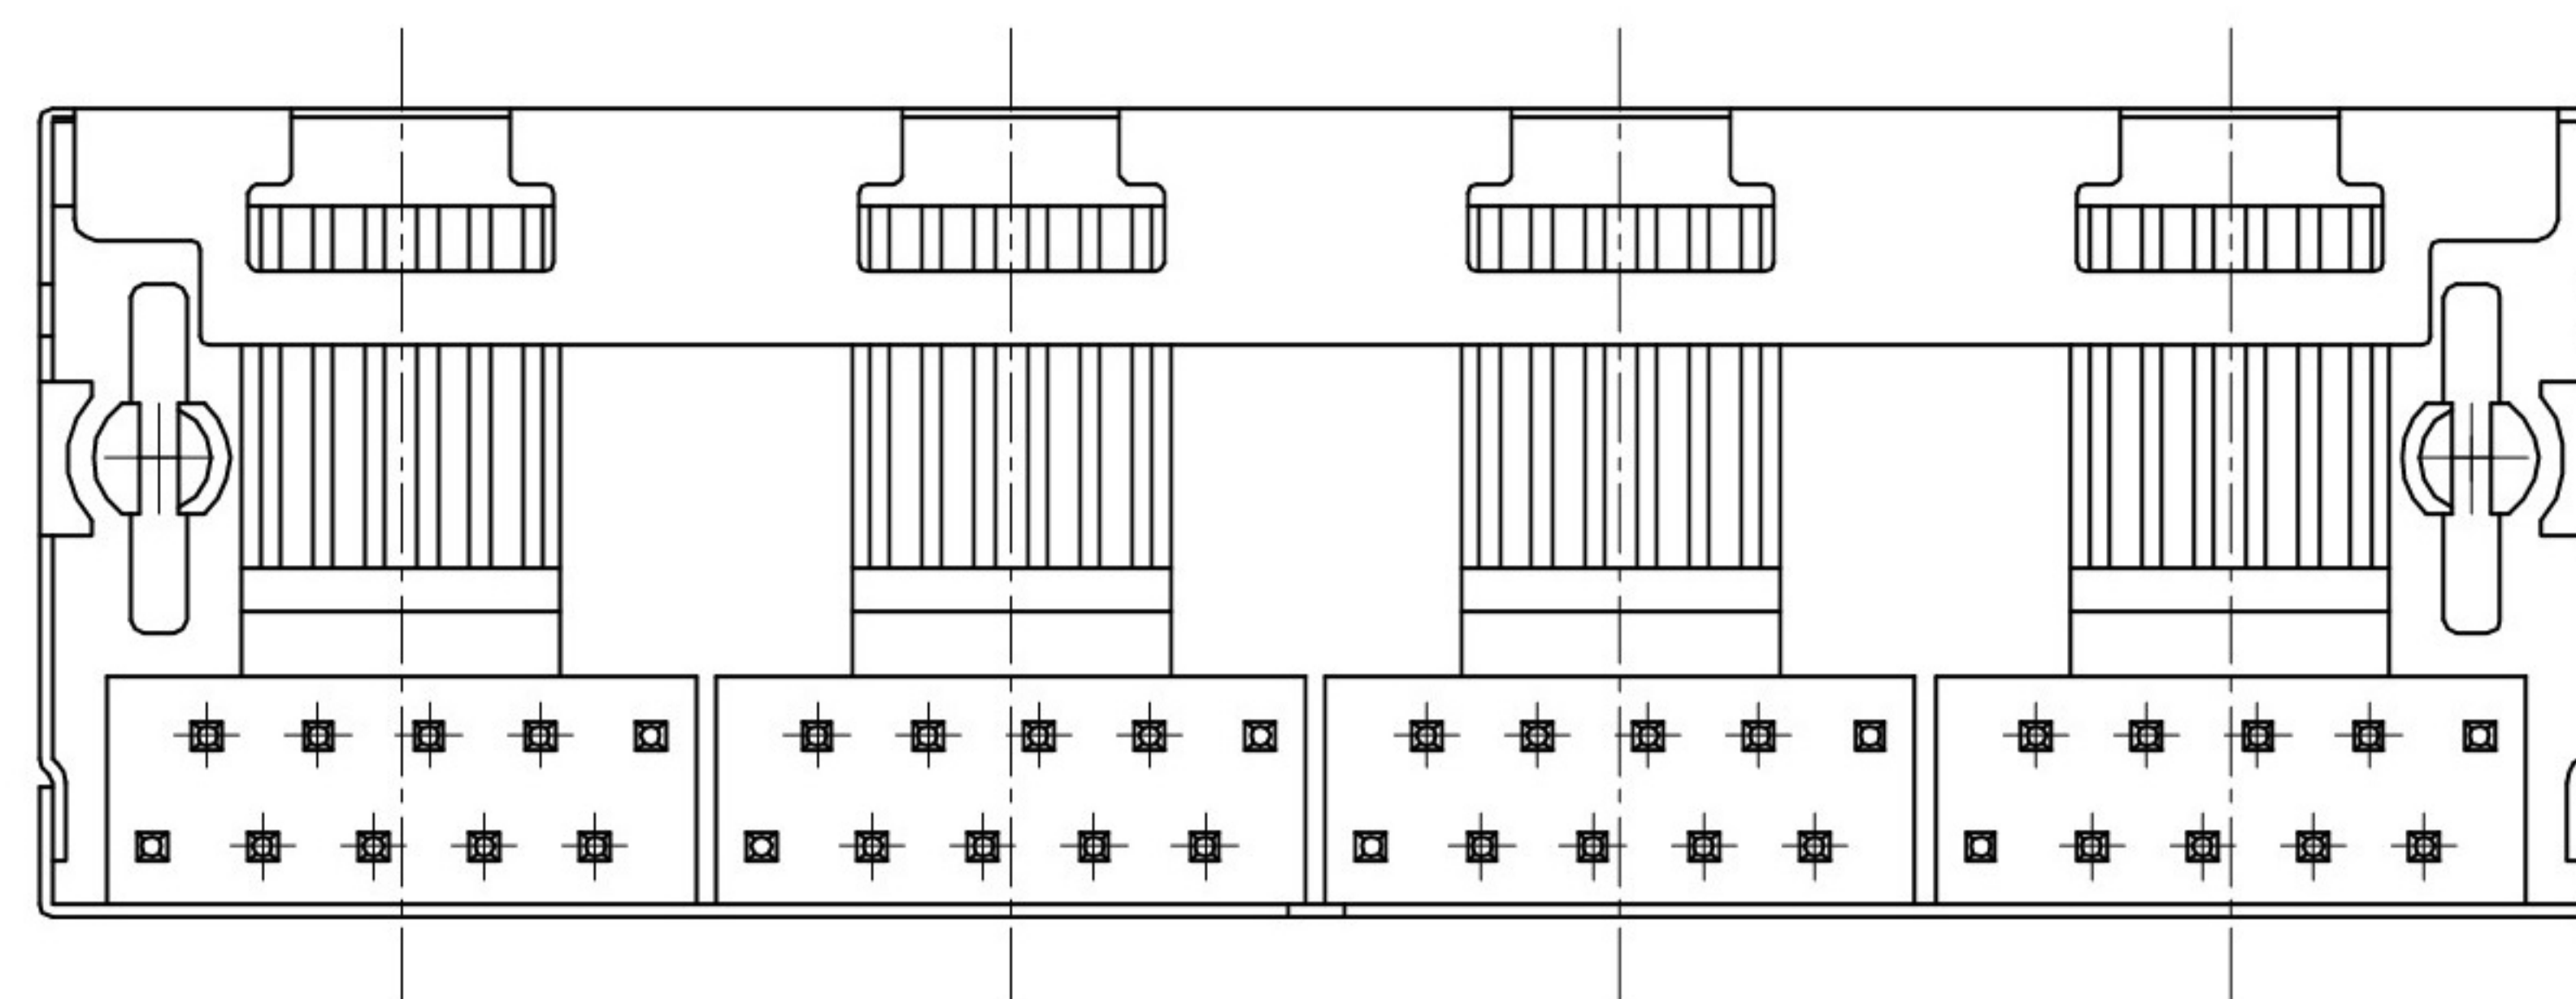


RoHS

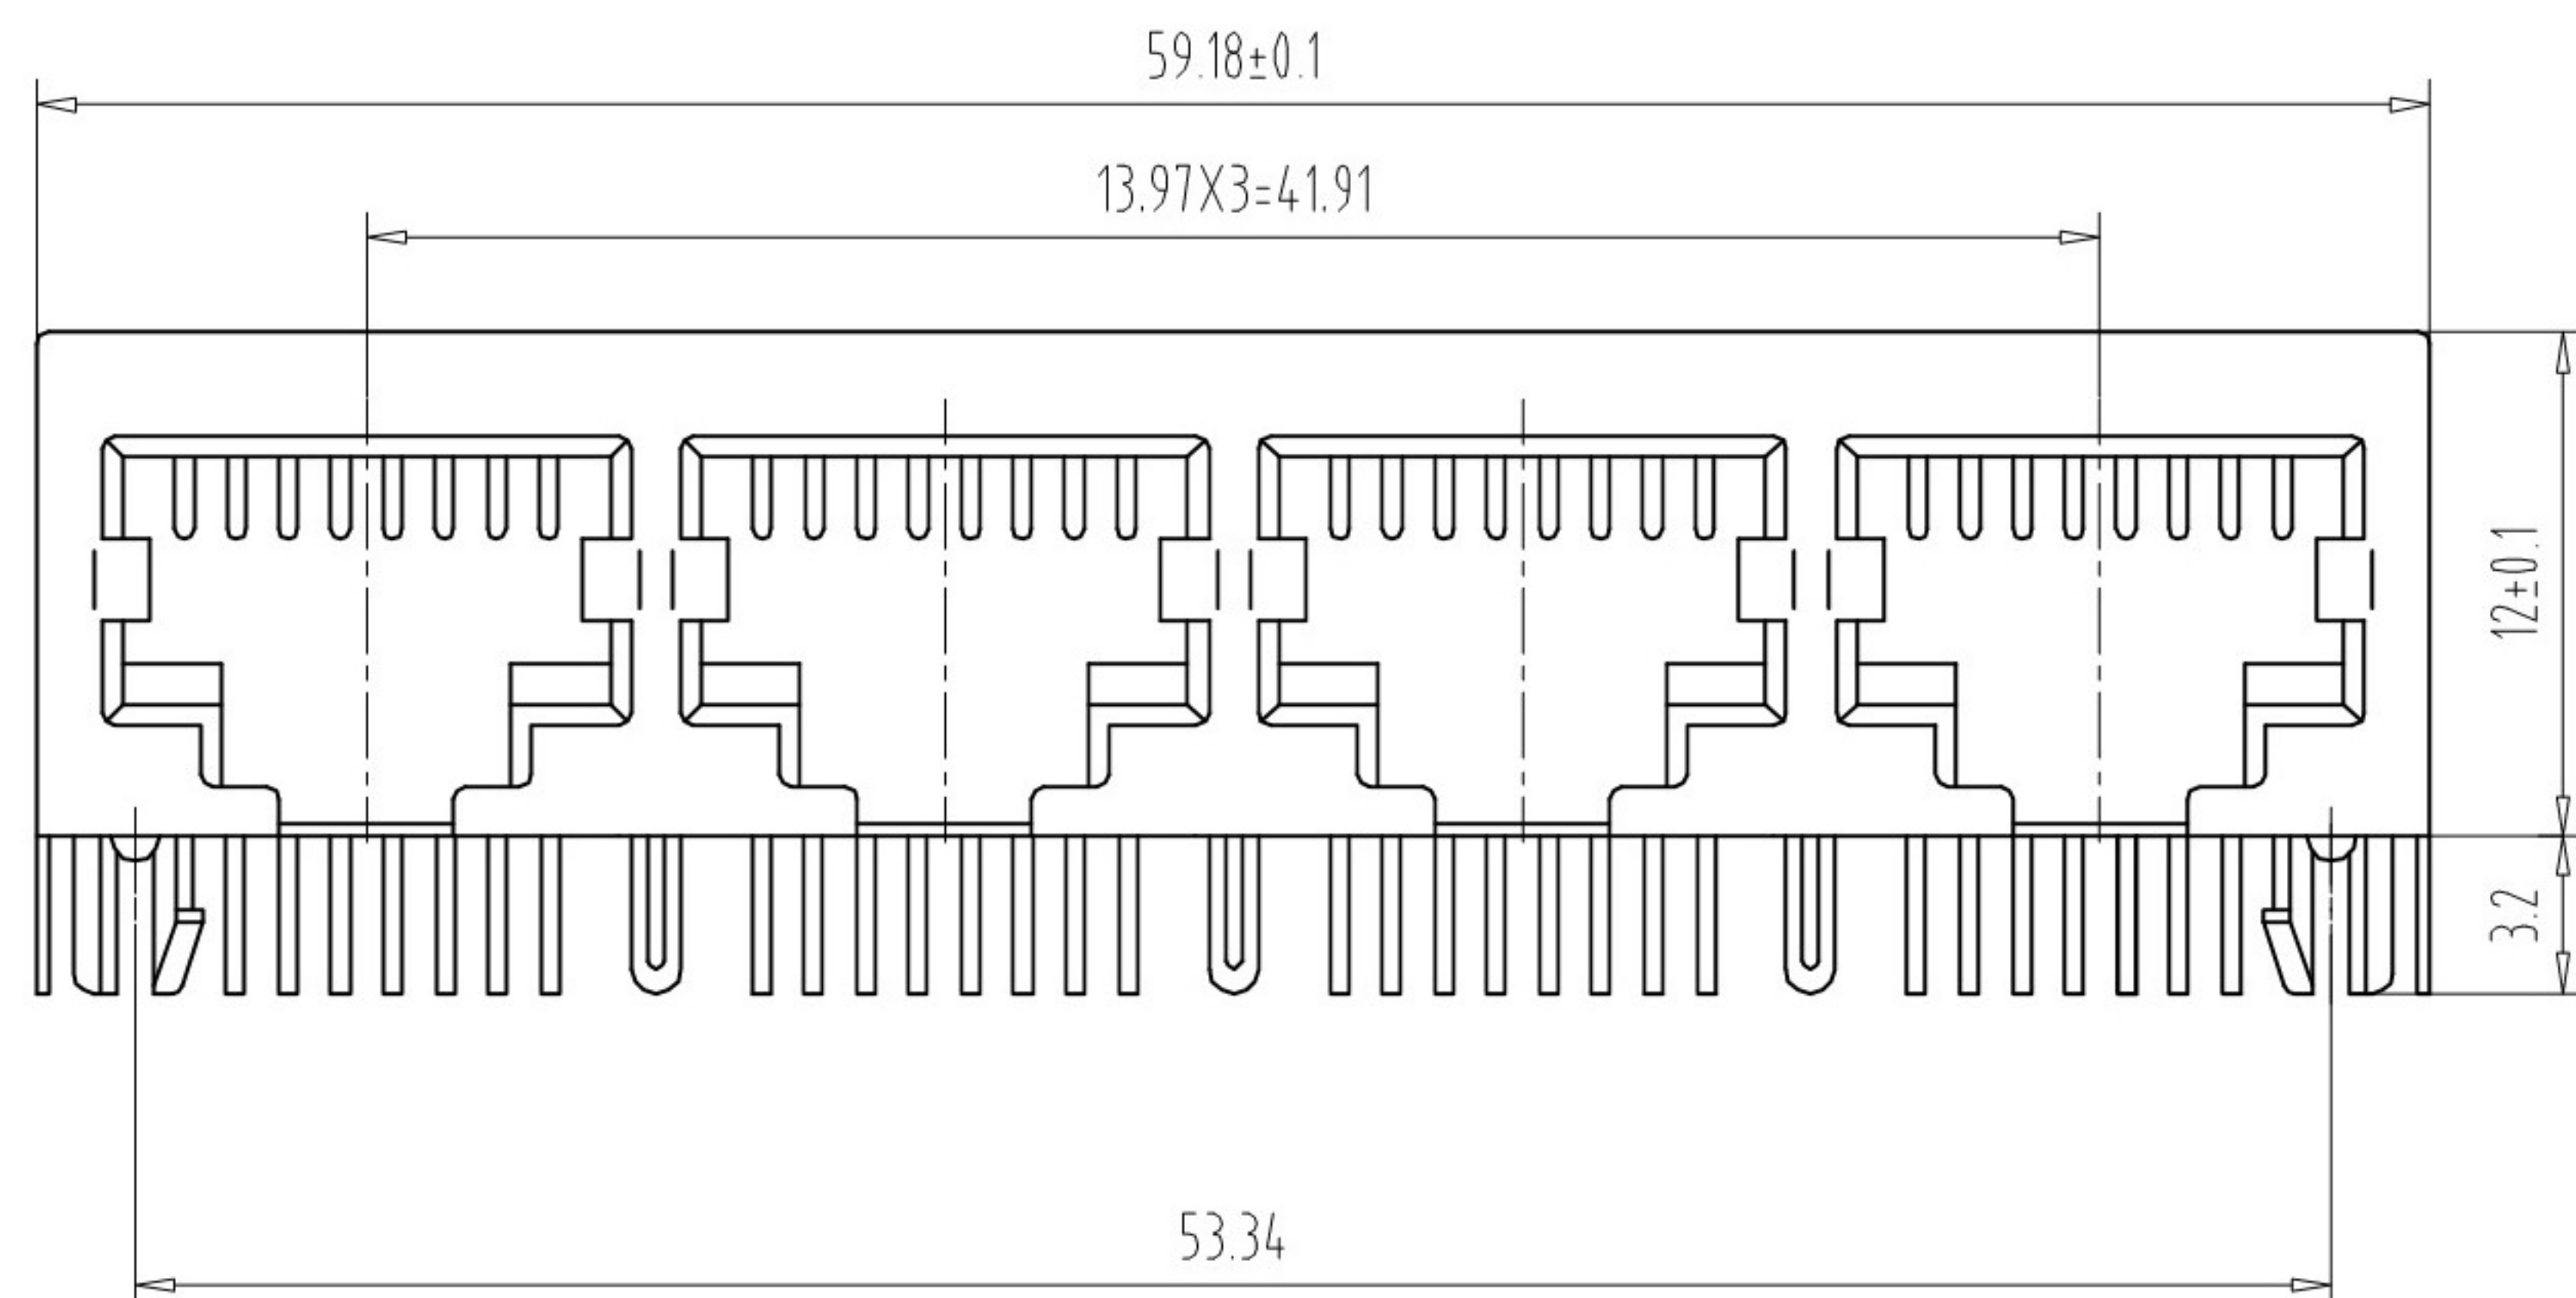

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

- 1.HOUSING MATERIAL
- 2.CONTACT MATERIAL
- 3.PLATING
- 4.SHIELD

- 1.GLASS FILLED POLYESTER UL94V-0
- 2.PHOSPHOR BRONZE $\phi 0.45\text{mm}$
- 3.GOLD PLATING OVER NICKEL
- 4.0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL:

- 1.VOLTAGE RATING
- 2.CURRENT RATING
- 3.CONTACT RESISTANCE
- 4.INSULATION RESISTANCE
- 5.DIELECTRIC WITHSTANDING RESISTANCE

- 1:125 VAC RMS
- 2:1A AMP.
- 3:30 MILL OHMS MAX.
- 4:500 MEGOHMS MIN @ 500V DC.
- 5:1000V AT RMS 50Hz 1MIN

MECHANICAL:

- 1.DURABILITY
- 2.PCB RETENTION PRE-SOLDER


- 1:250 CYCLES MIN.
- 2:1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE
- 2.OPERATION

- 1:-40 $^{\circ}$ ~+85 $^{\circ}$
- 2:0 $^{\circ}$ C TO 70 $^{\circ}$ C

PART NUMBER:

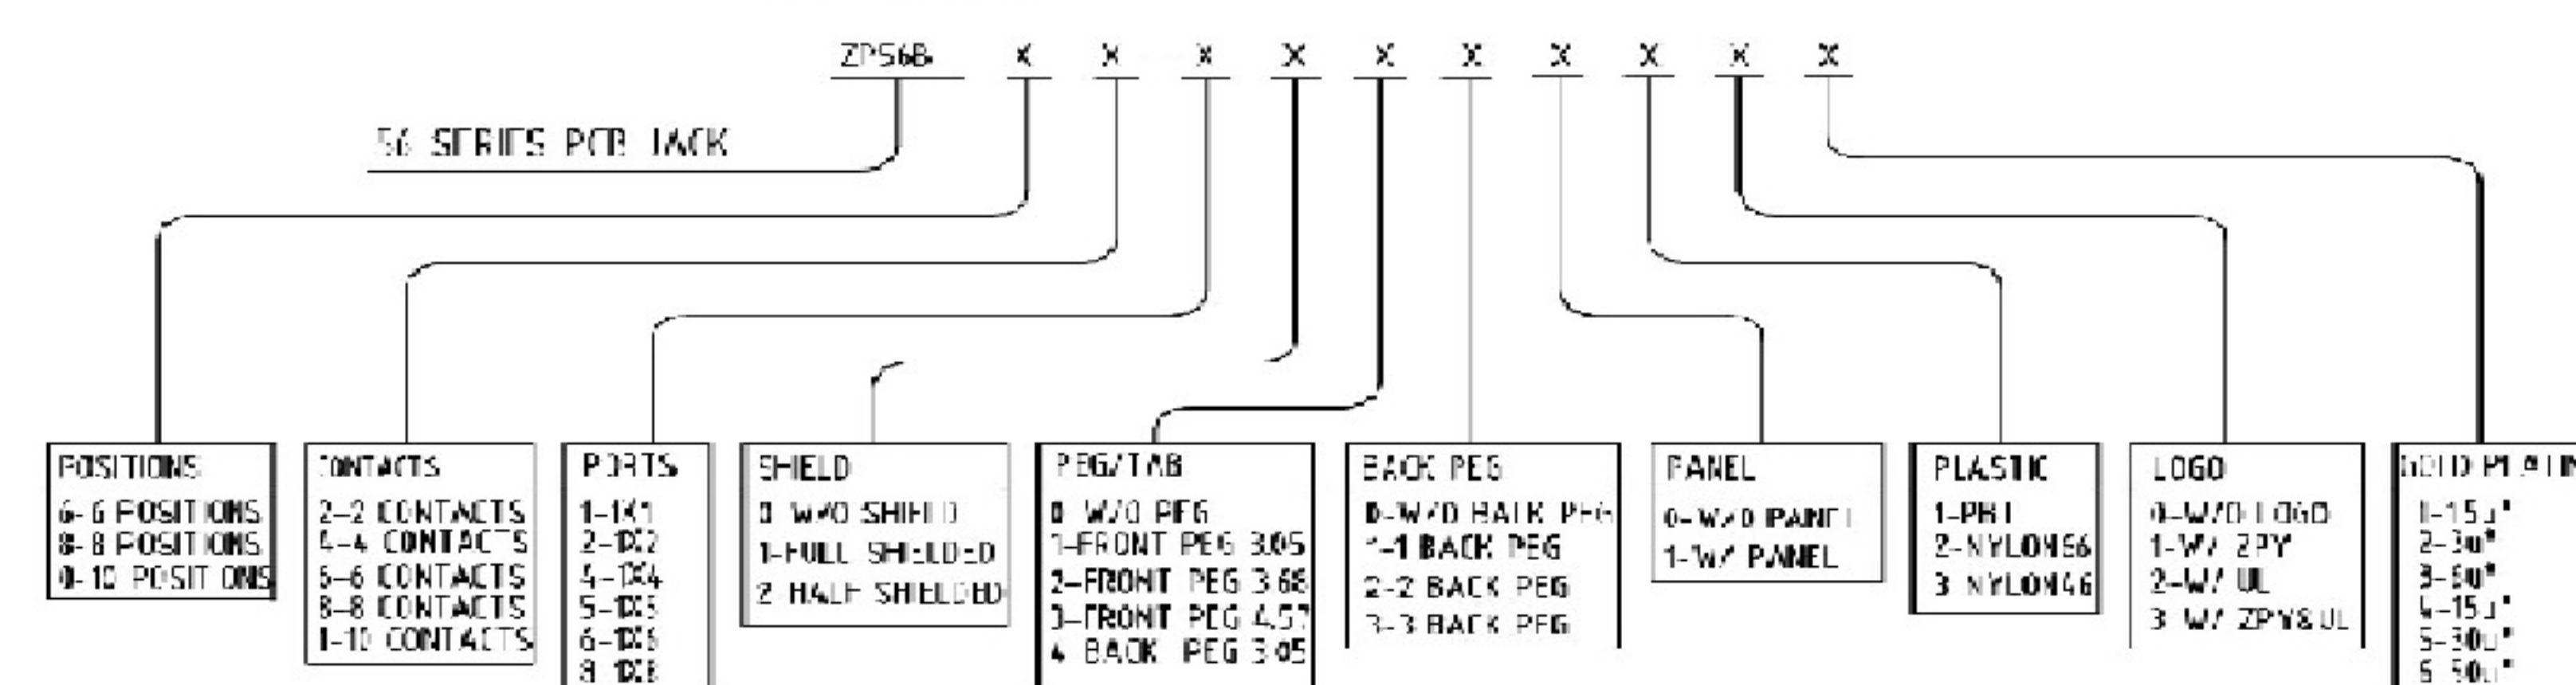

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO.,LTD

Address: China, Dongguan City, Guangdong Province, Huang Jiang
TLE: 0769-82055138 0769-82056828
E-mail: XB@ALPSR.CN E-mail: CN@ALPSR.CN
Website: www.alpsr.cn www.alpsr.com

TITLE: RJ45	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: JP.Gong
PART NO.:	SACLE 1:1	REV A0	$x\pm 0.35$	$x^{\circ}\pm 3.0^{\circ}$	CHECKED BY: TW.Xu
REMARK:	SHEET 1/2		$.x\pm 0.30$	$.x^{\circ}\pm 2.0^{\circ}$	DESIGND BY: ZG.Hu
			$.xx\pm 0.25$	$.xx^{\circ}\pm 1.5^{\circ}$	
			$.xxx\pm 0.10$	$.xxx^{\circ}\pm 1.0^{\circ}$	