

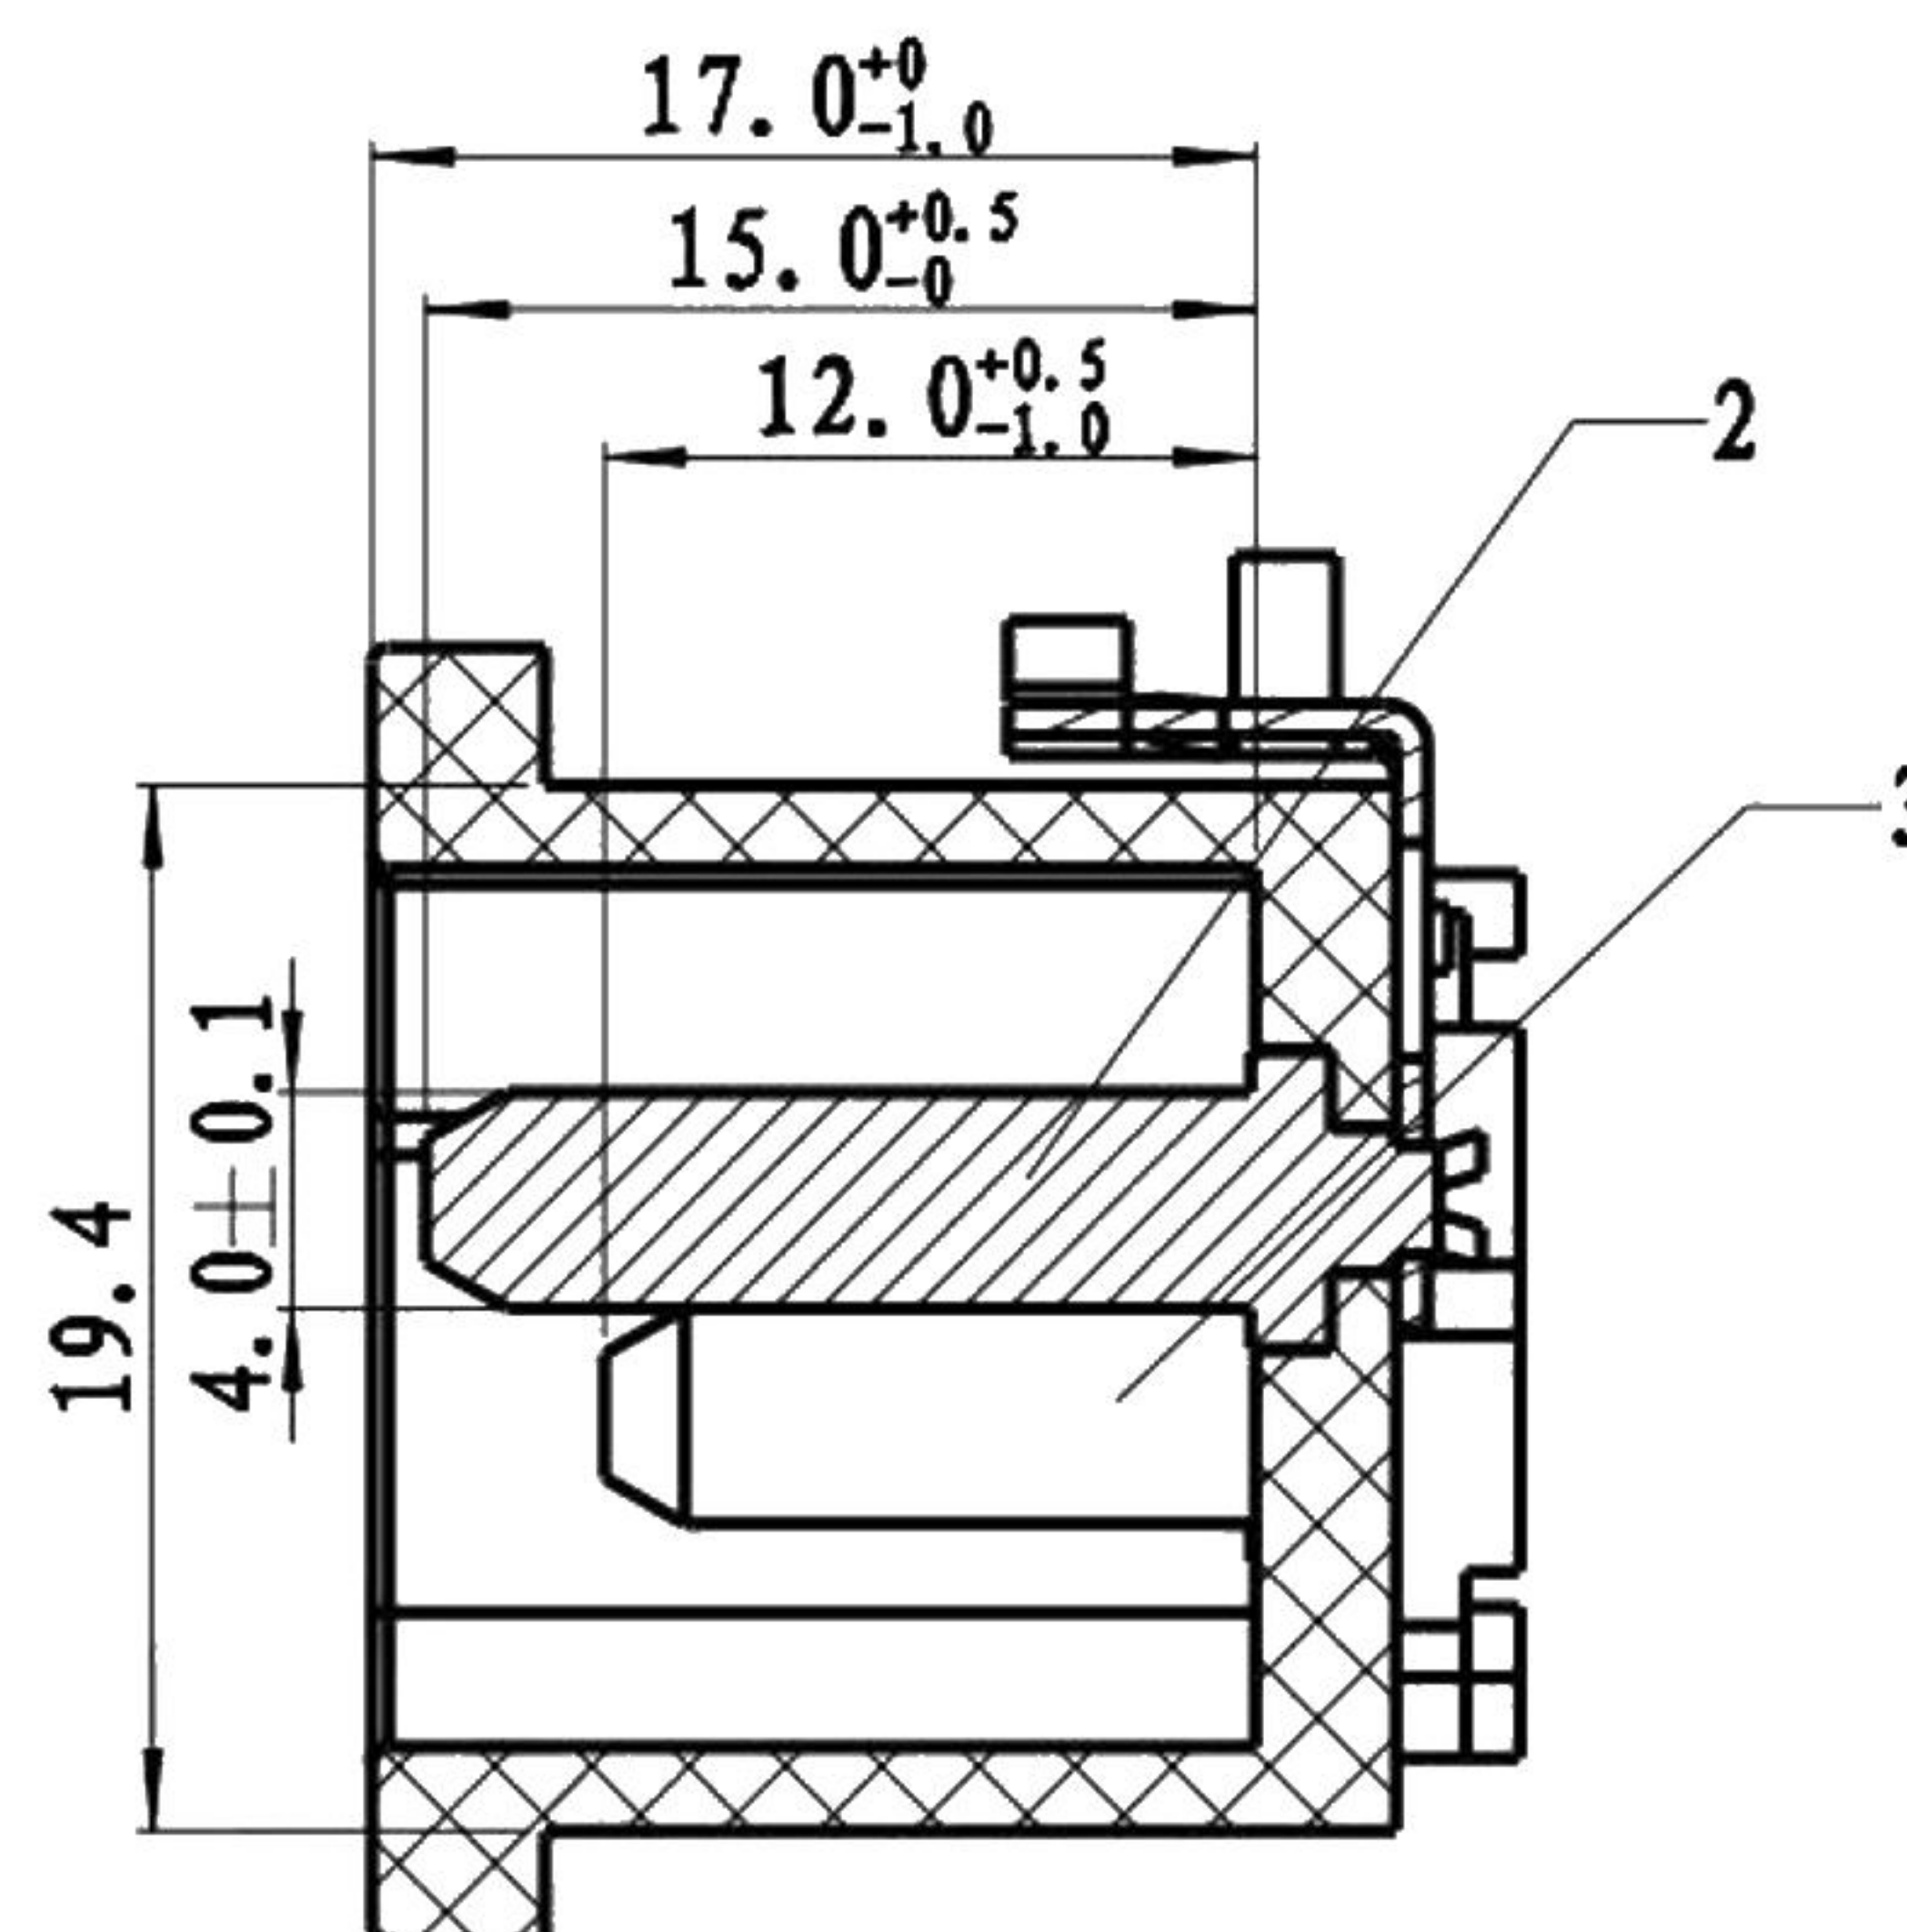


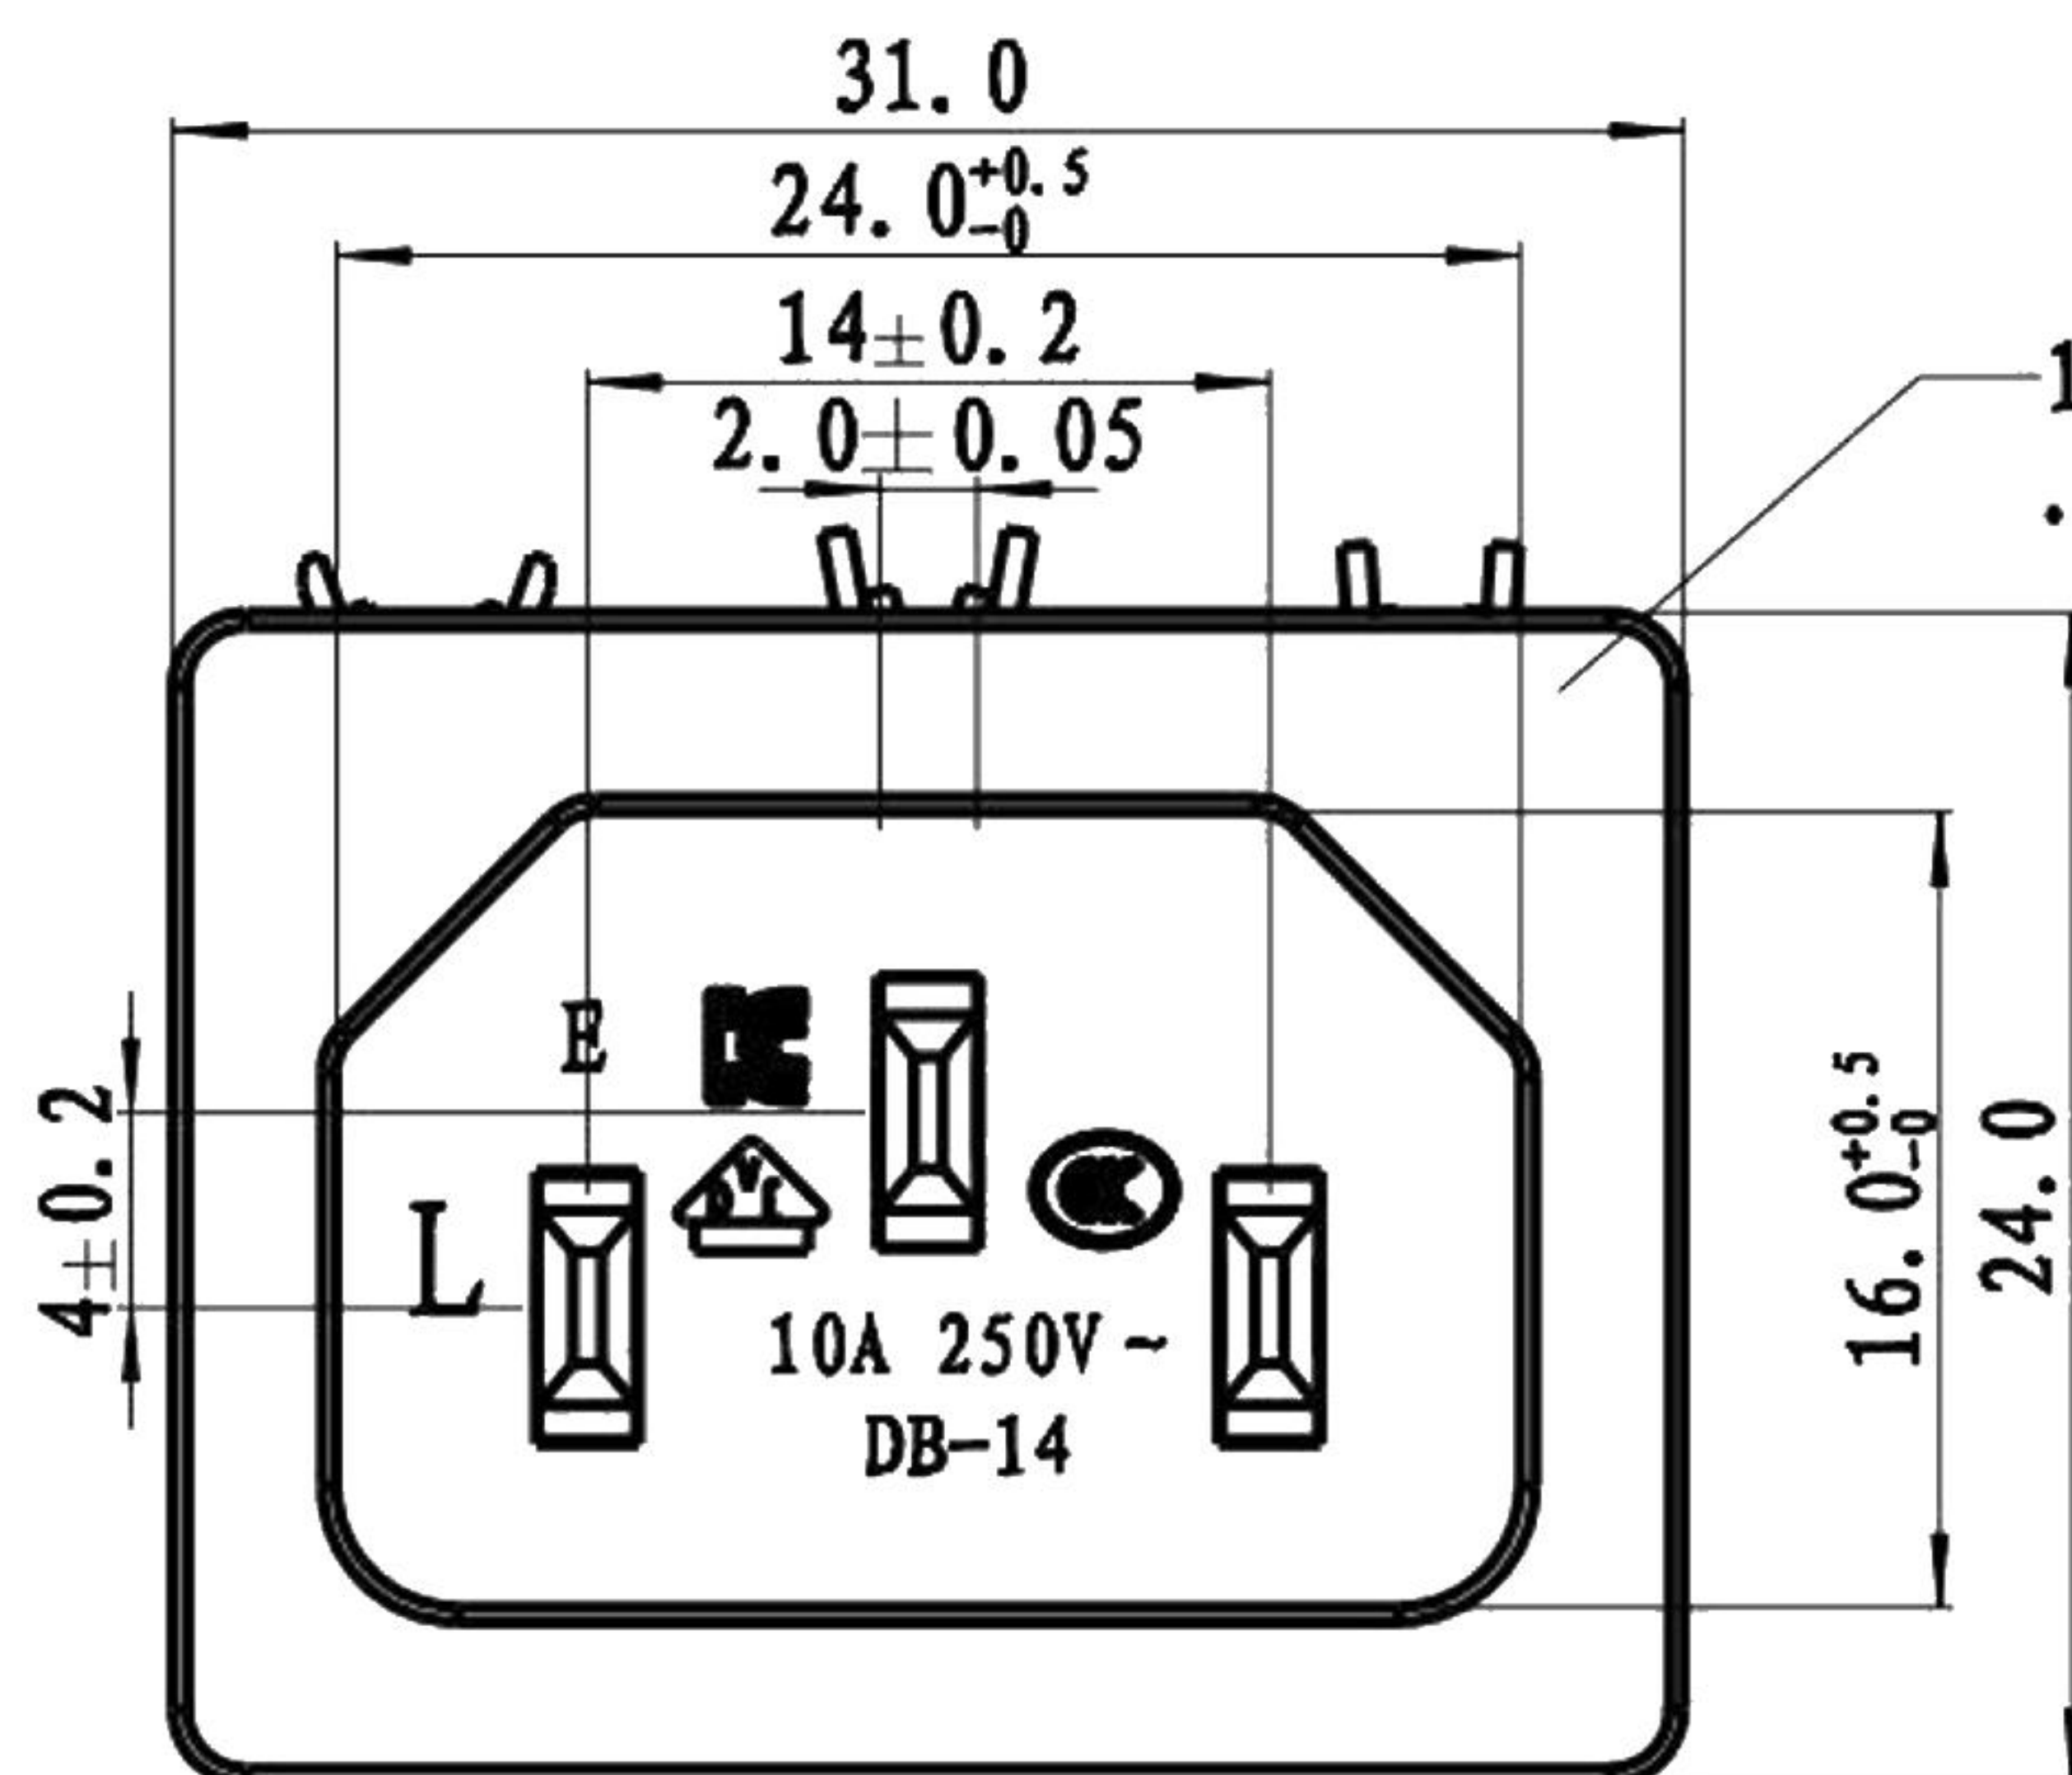

剖面 A-A

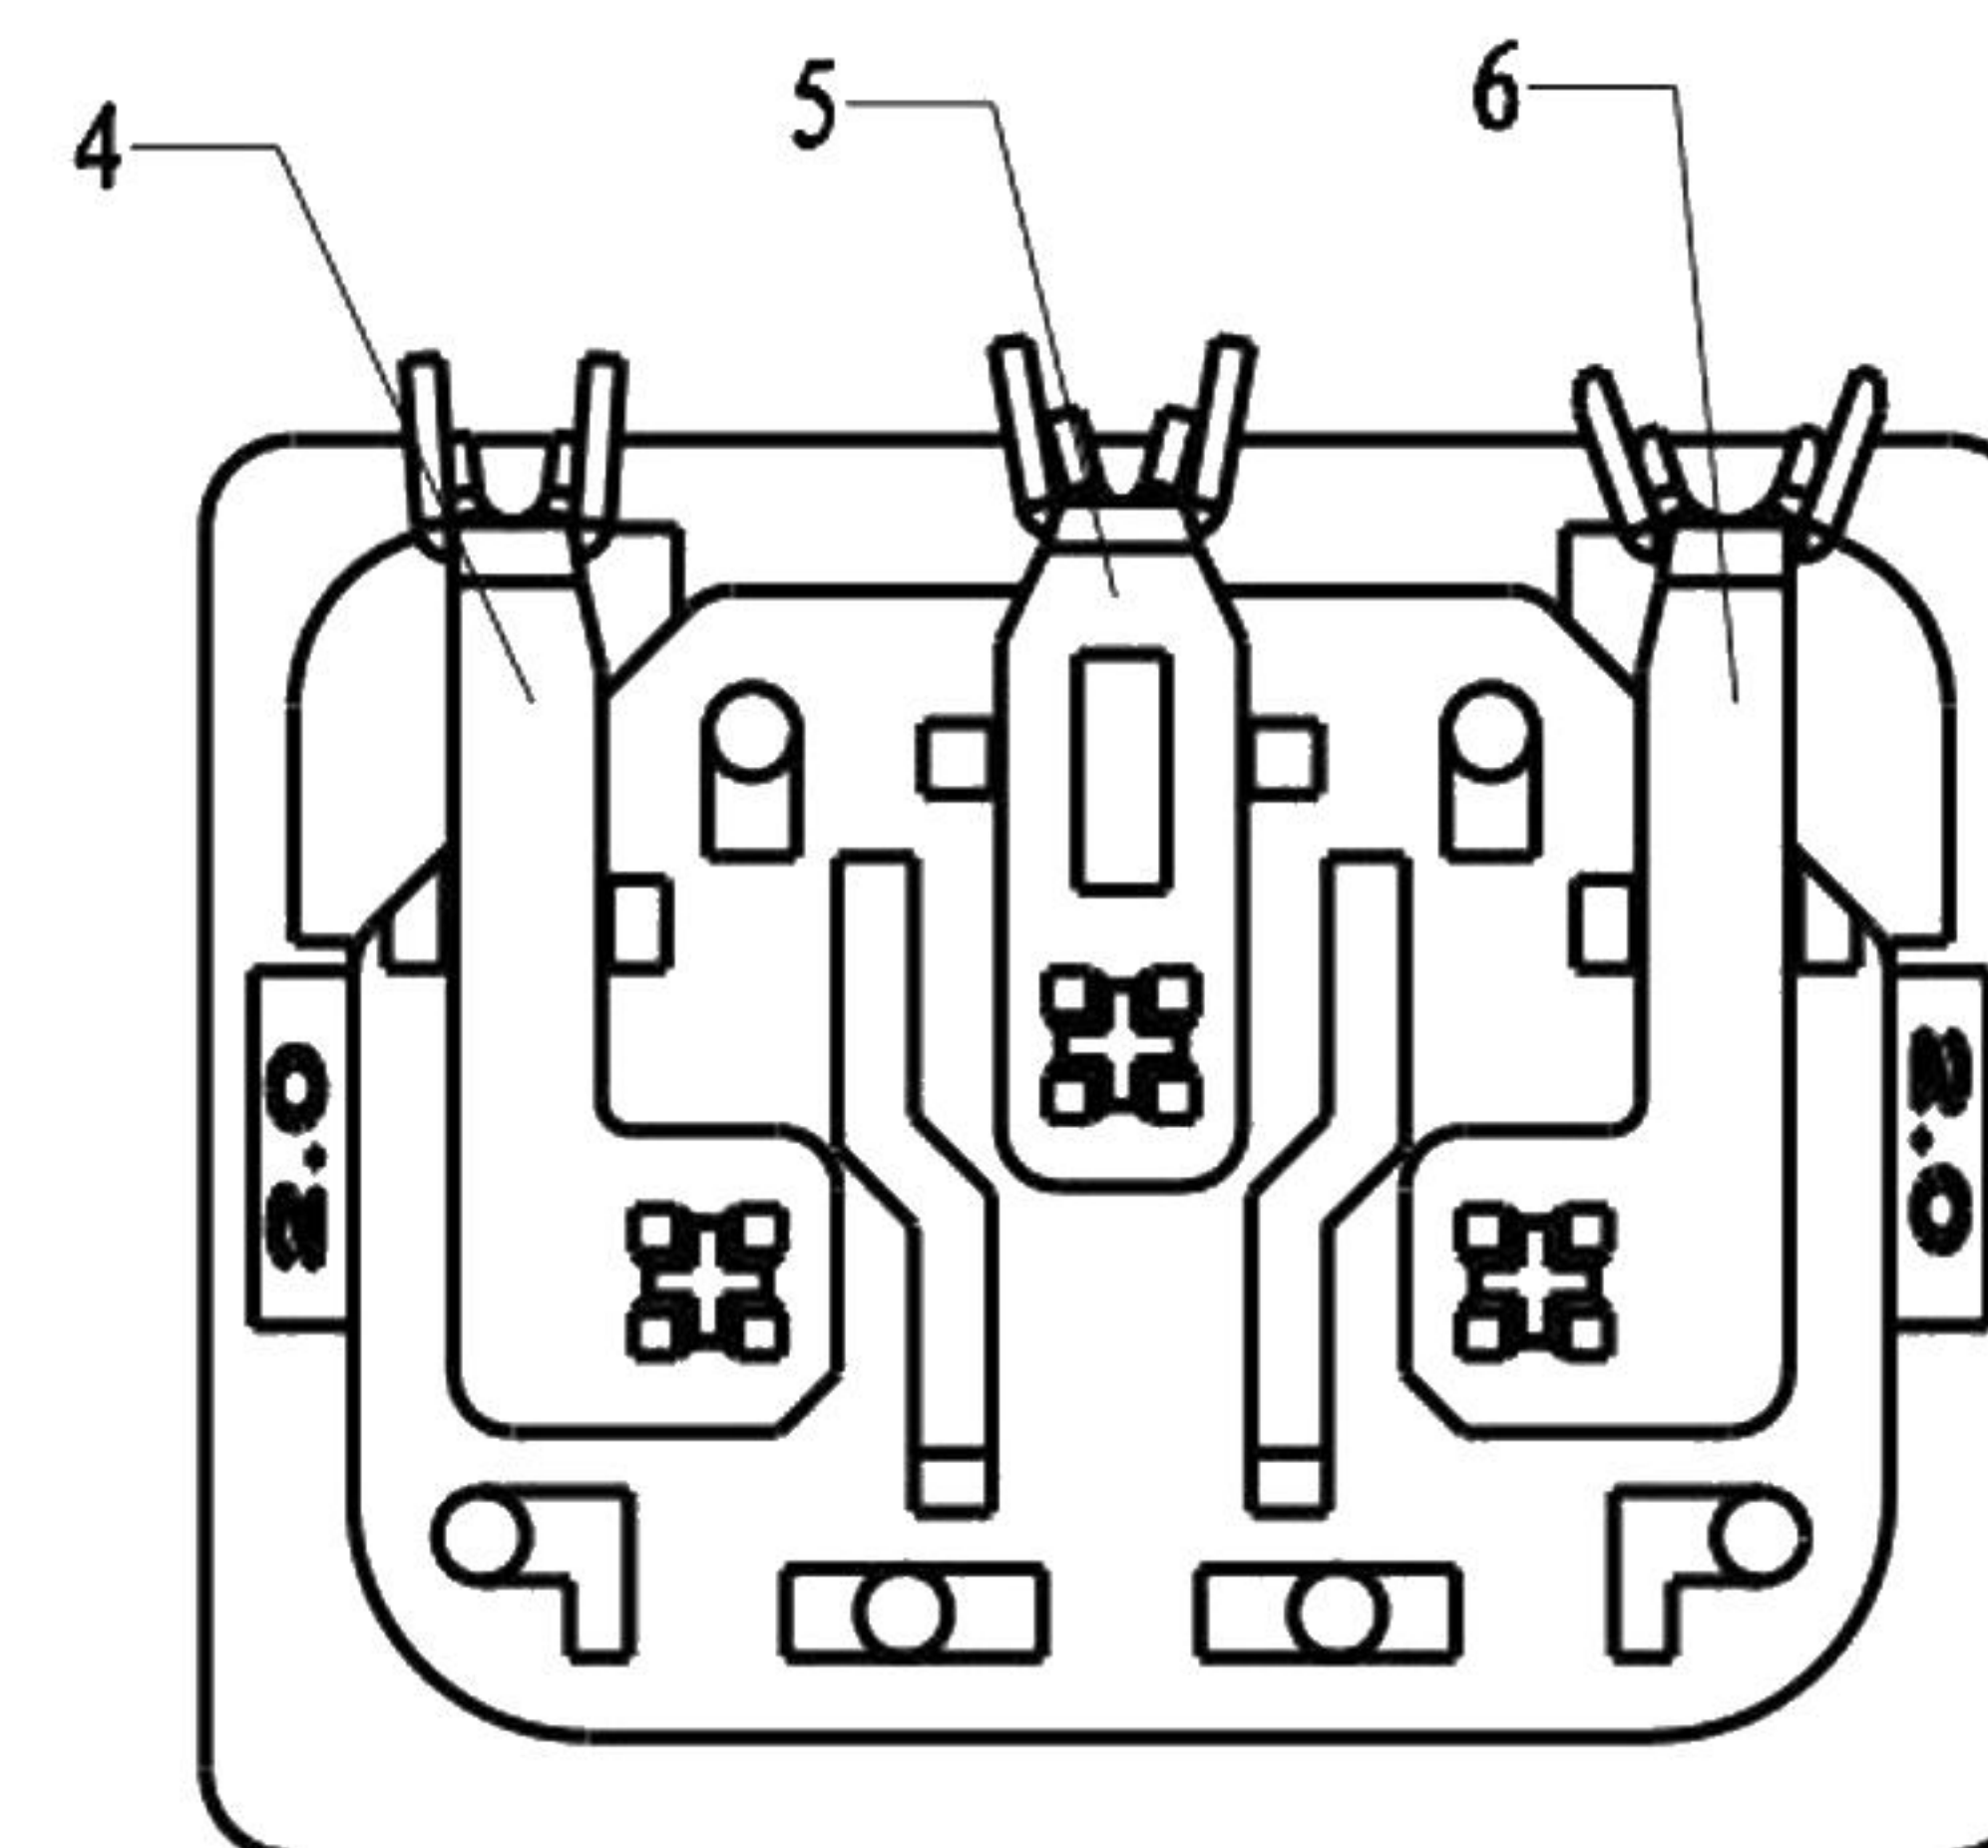

Rating:

10A 250V AC VDE 3C KC

Insert And Extract Force: 20N ~ 50N

Terminal Strength: > 60N

Operating Life: > 6000 cycles



Withstand Voltage: Between all terminals: 2500VAC(50-60Hz) 1min

Terminals to Base: 3750V AC(50-60Hz) 1min

Leakage Current: 1mA

Insulation Resistance: > 100MΩ 500V DC

Body Material: PBT 94V0

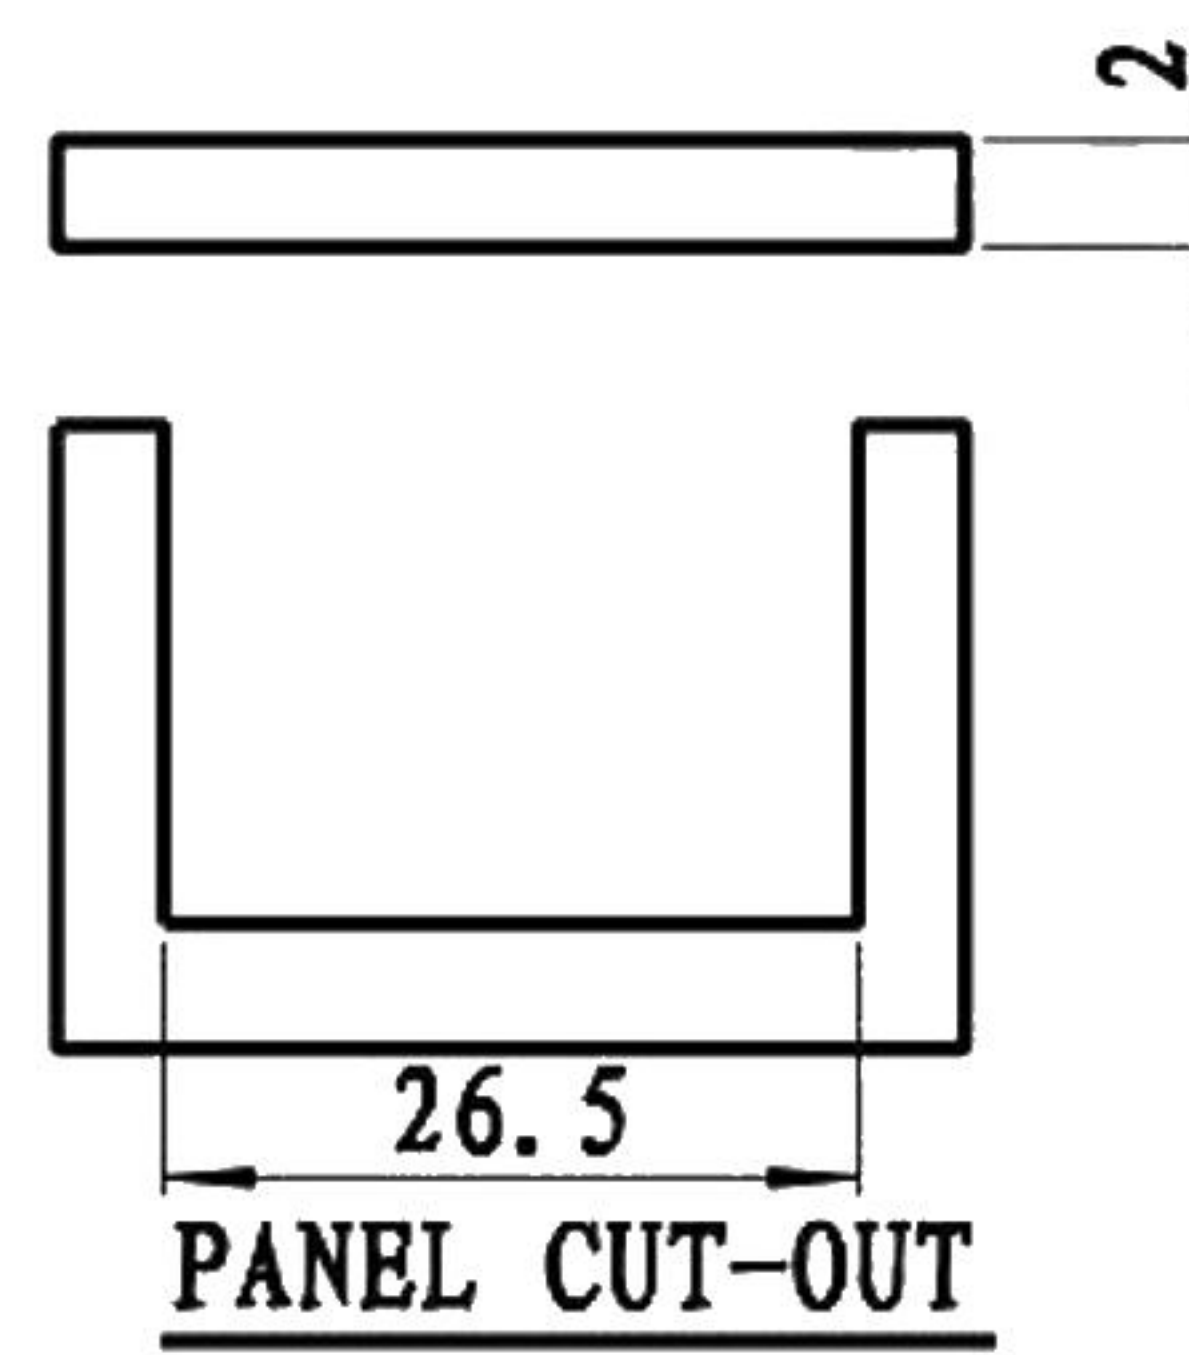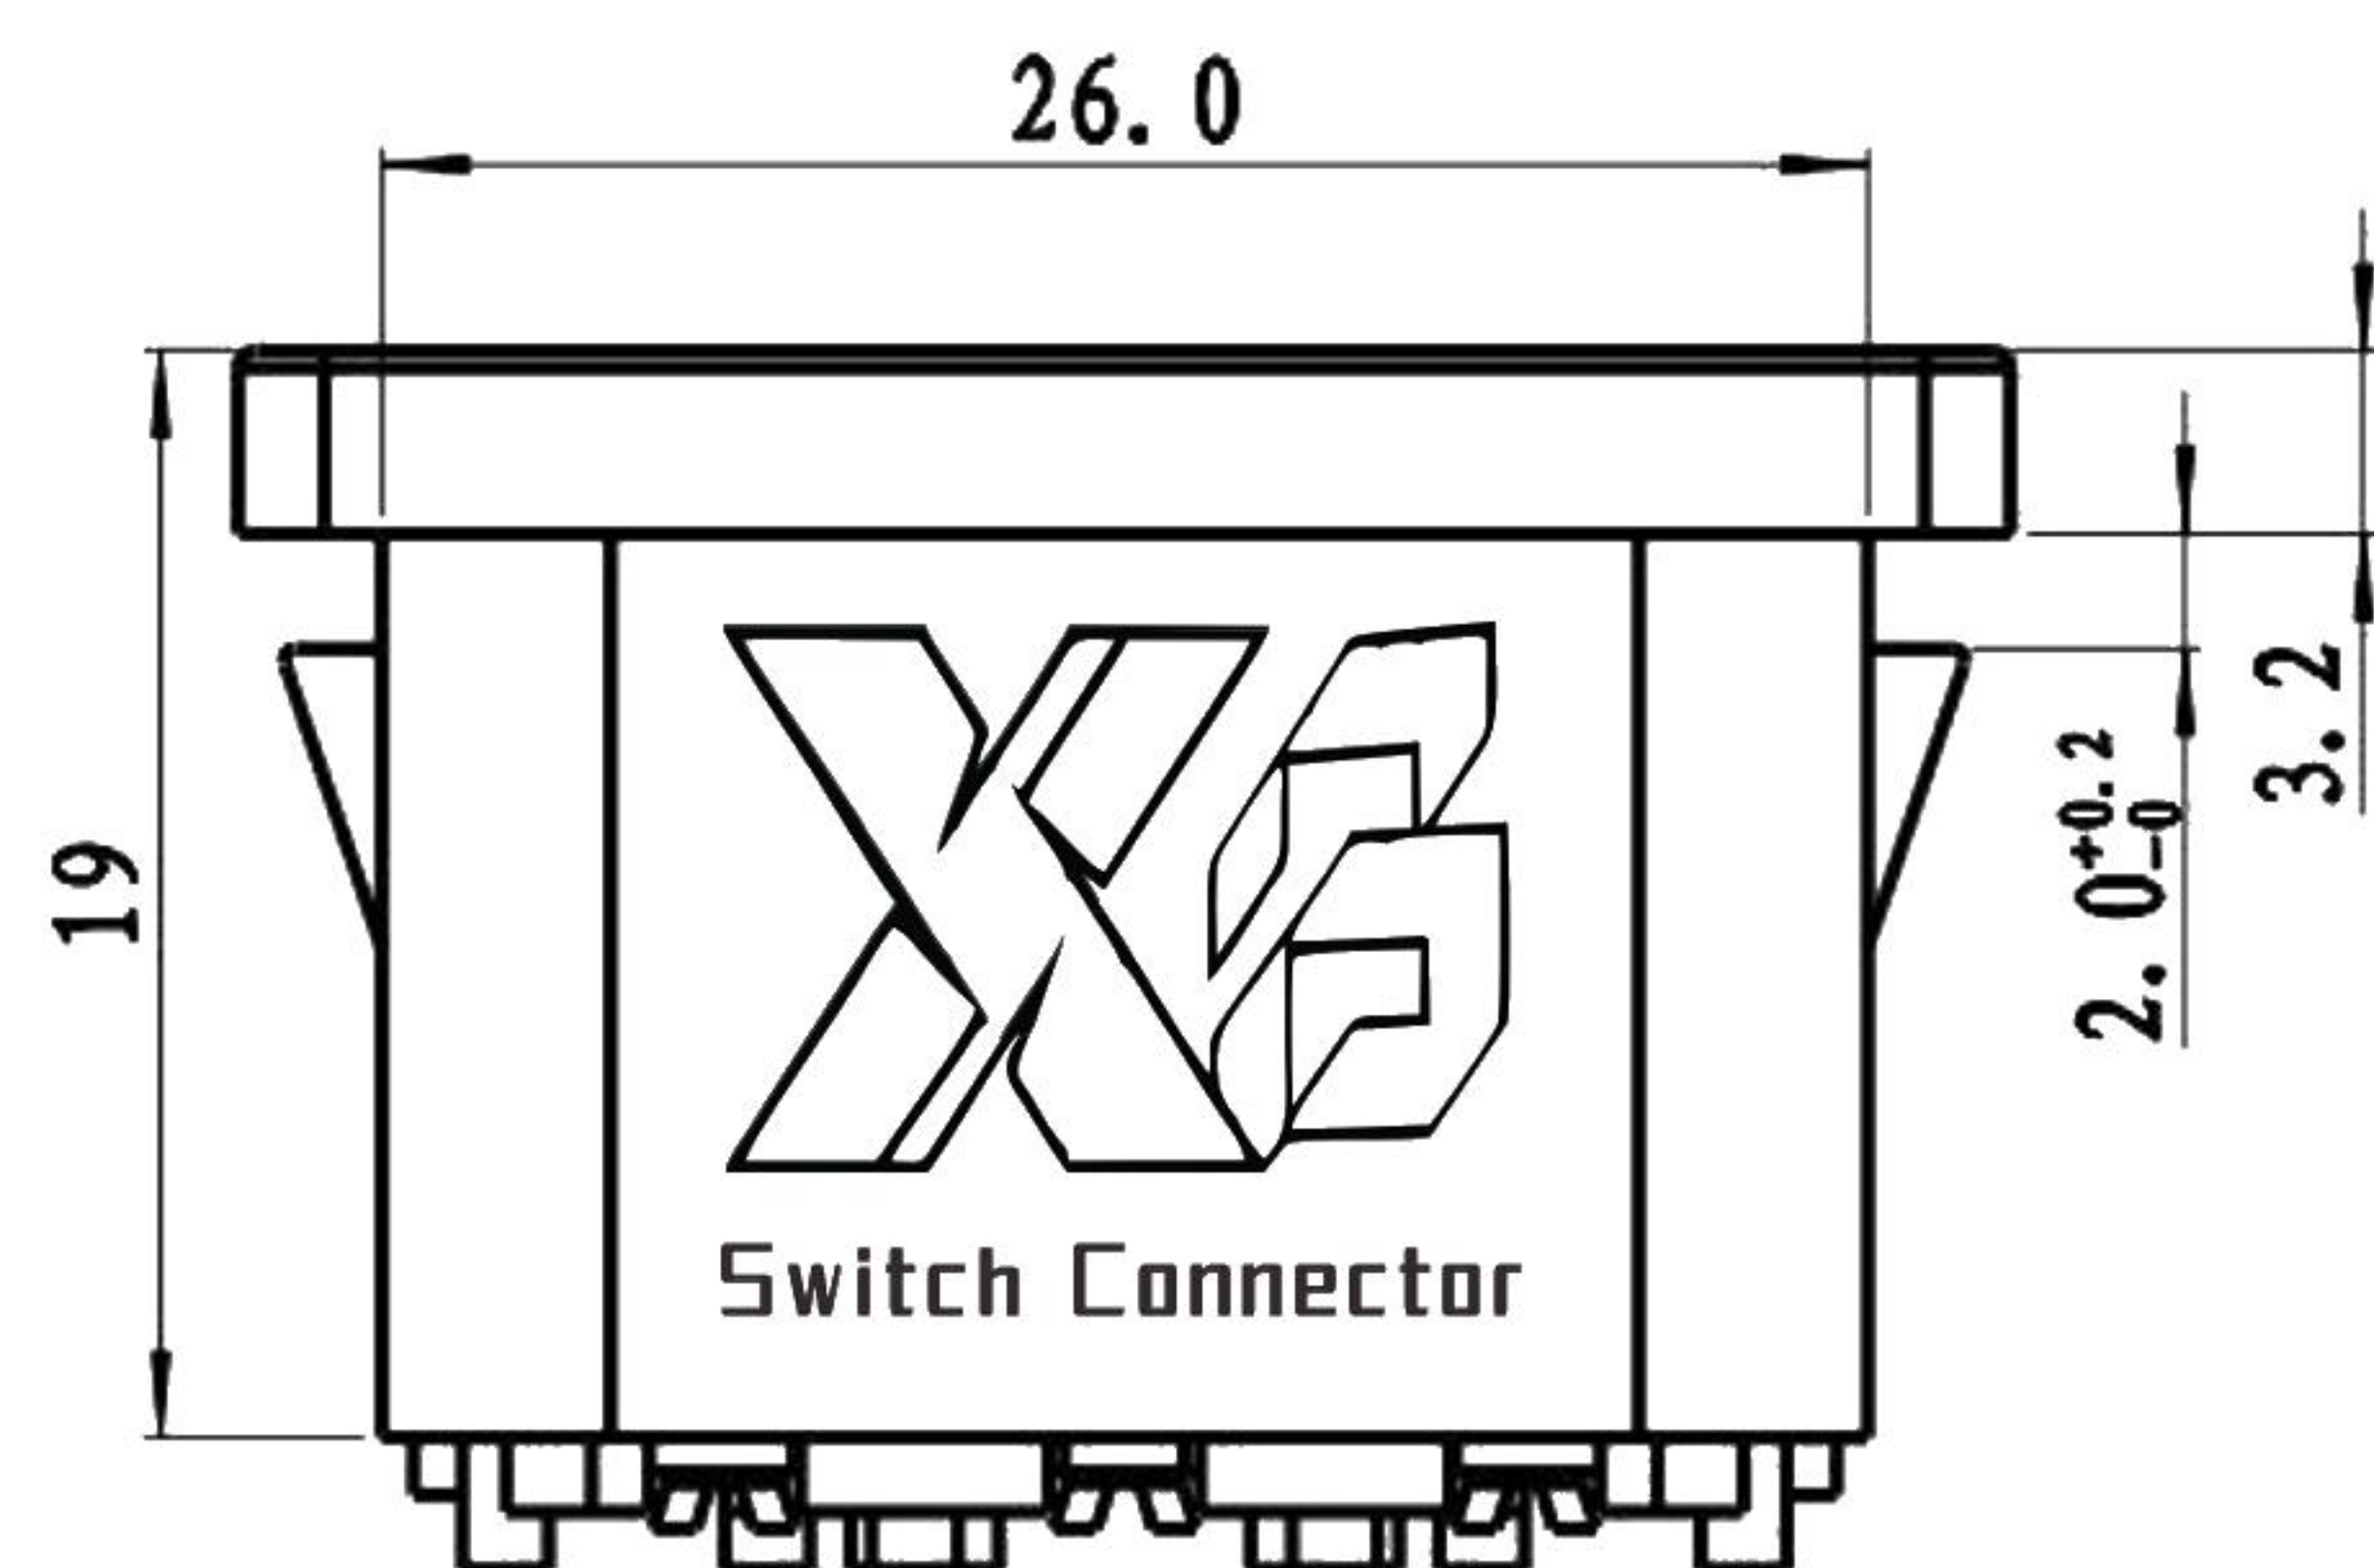

55*43*23.5cm箱, 50只*40吸盒装=2k件, 净重: 20.4 毛重: 23.4=KG,

序号	名称	材料	处理	数量	备注
1	DB-14-3PE塑料件	PBT	黑色	1	
2	DB-14-PA(A)长插销	黄铜	镀镍	1	
3	DB-14-P1(1)短插销	黄铜	镀镍	2	
4	DB-14-HBR	黄铜	镀锡	1	
5	DB-14-E3	黄铜	镀锡	1	
6	DB-14-HBL	黄铜	镀锡	1	

普通公差:

COMMON TOLERANCE:

UP TO 5 ±0.20

ABOVE 5 TO 30 ±0.30

ABOVE 30 ±0.50

ANGULAR ±5°

单位

mm

绘图

金泽杰

日期

2022/4/30

日期

2022/4/30



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

投影



核校

张华龙

核准

周子雷

核准

周子雷

品名

AC Inlet C14

型号

/DB-14

料号

DB-14-3PE-E3HB(2.0)-ZP

料号

DB-14-3PE-E3HB(2.0)-ZP

比例

SCALE

Free

Free

REV.	DATE	REVISION DESCRIPTION	ISSUE