
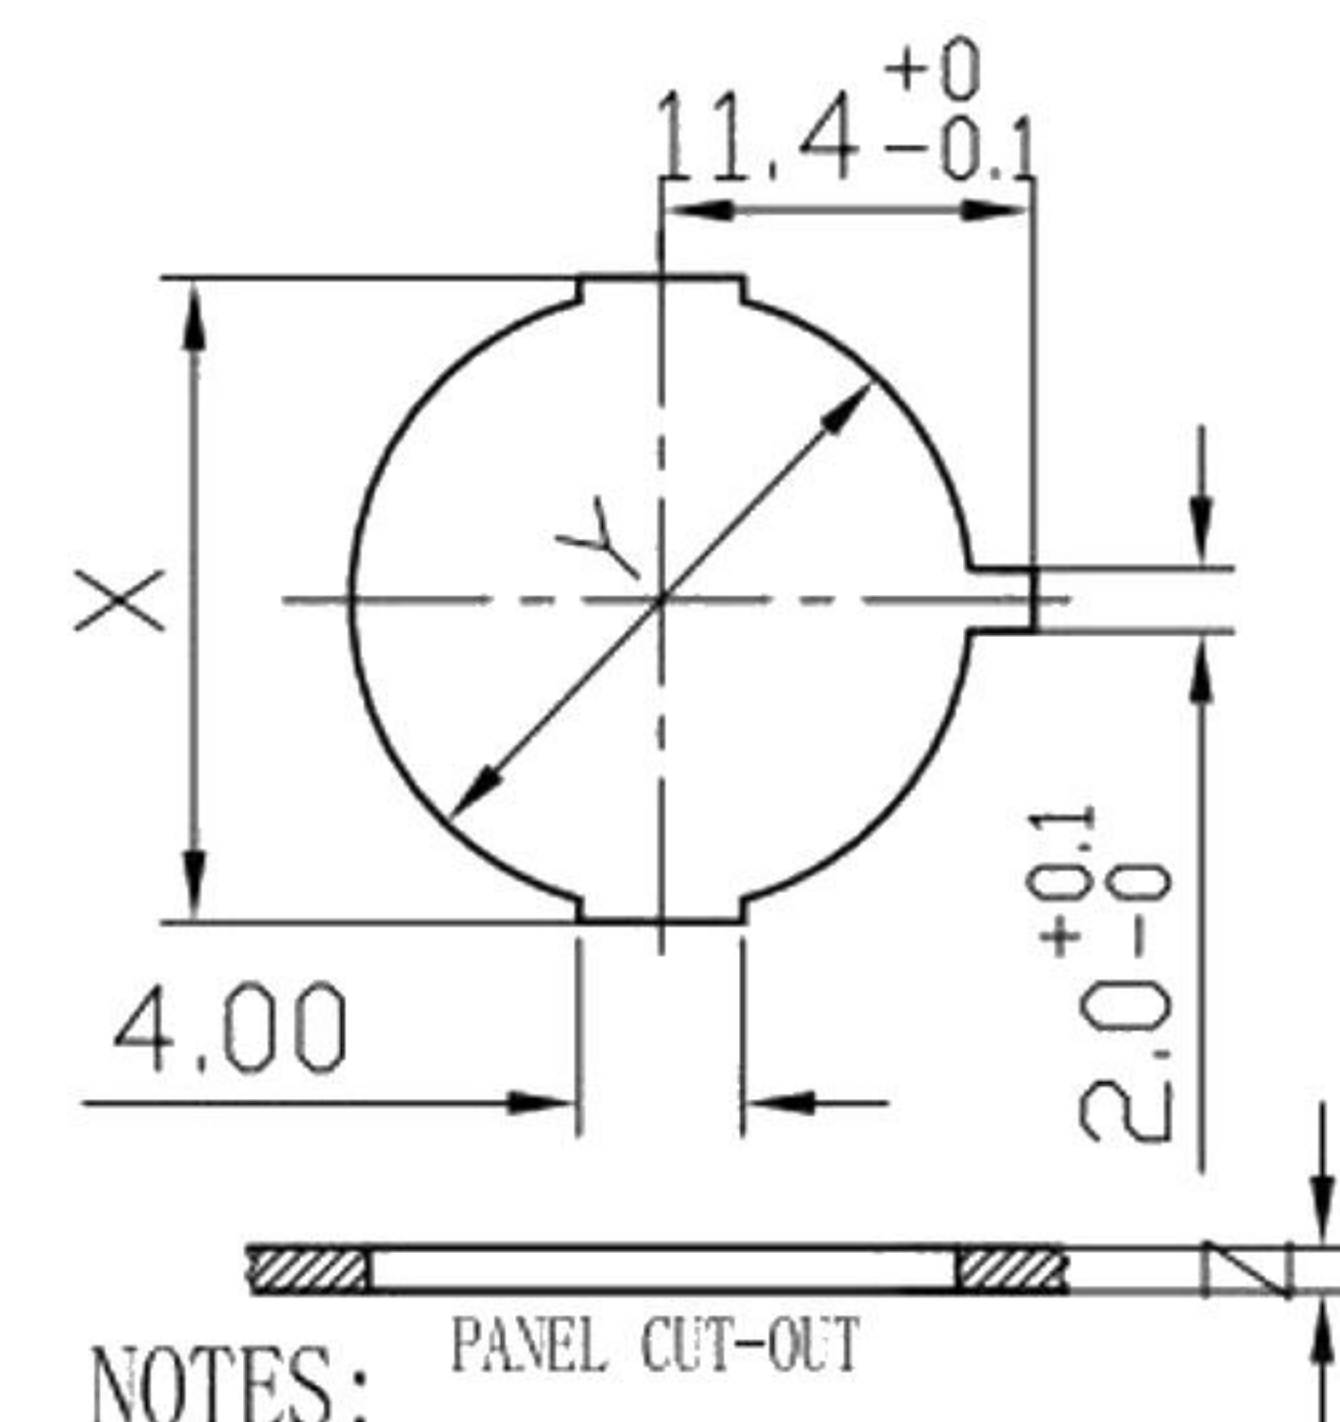
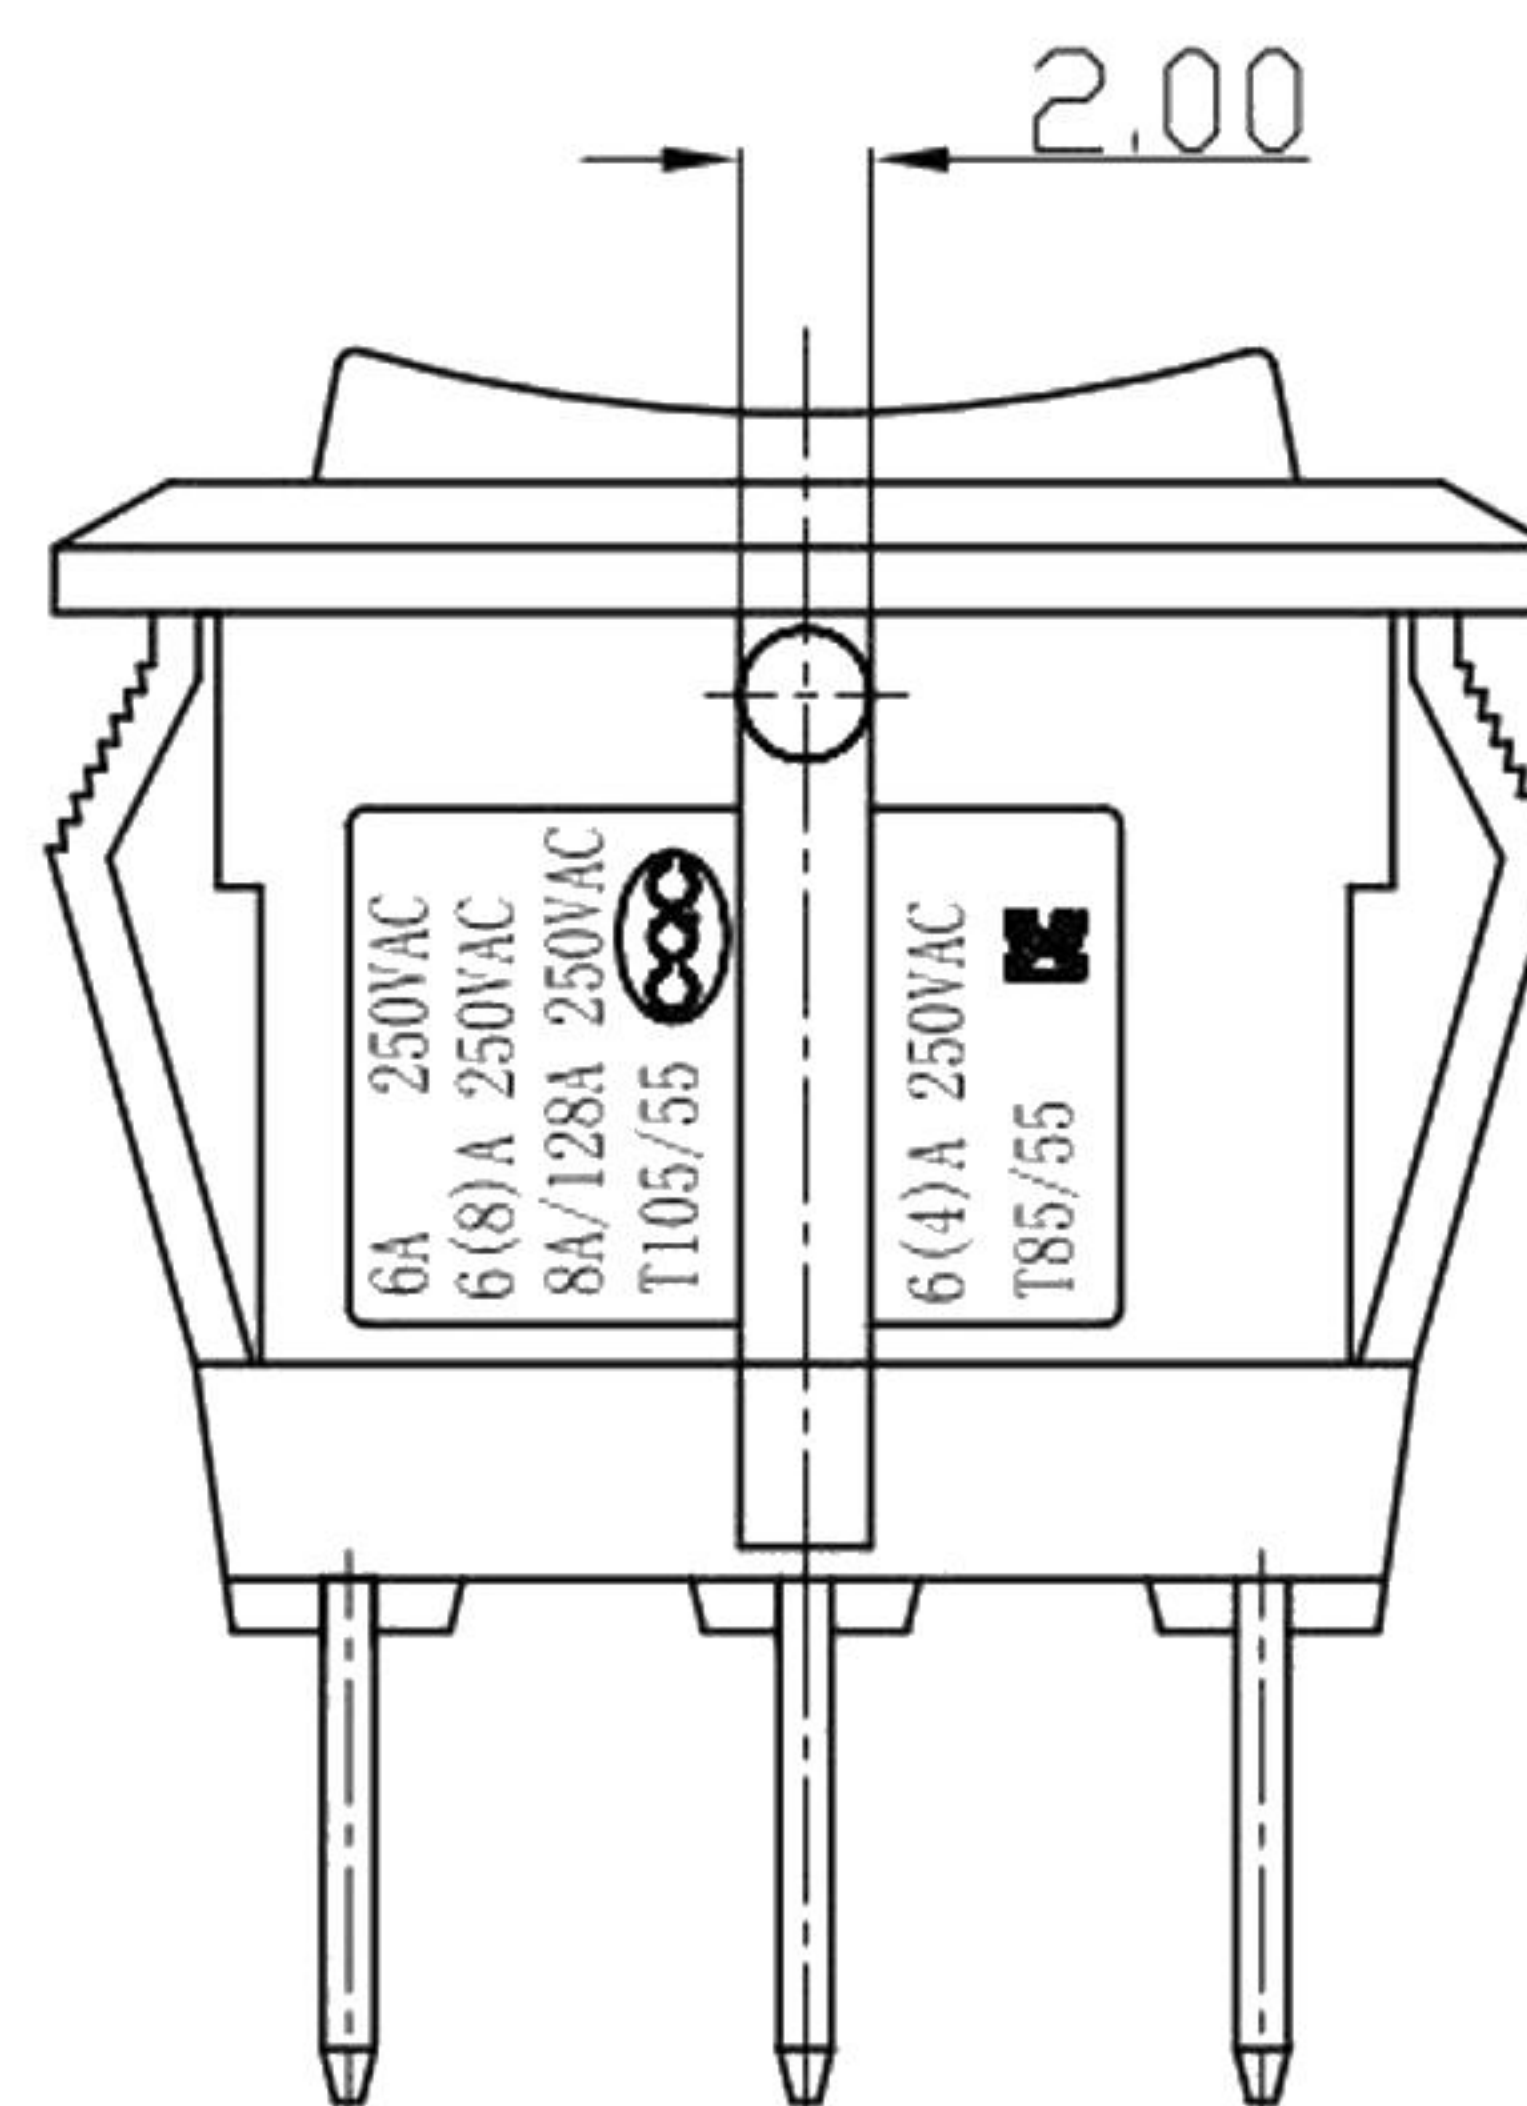
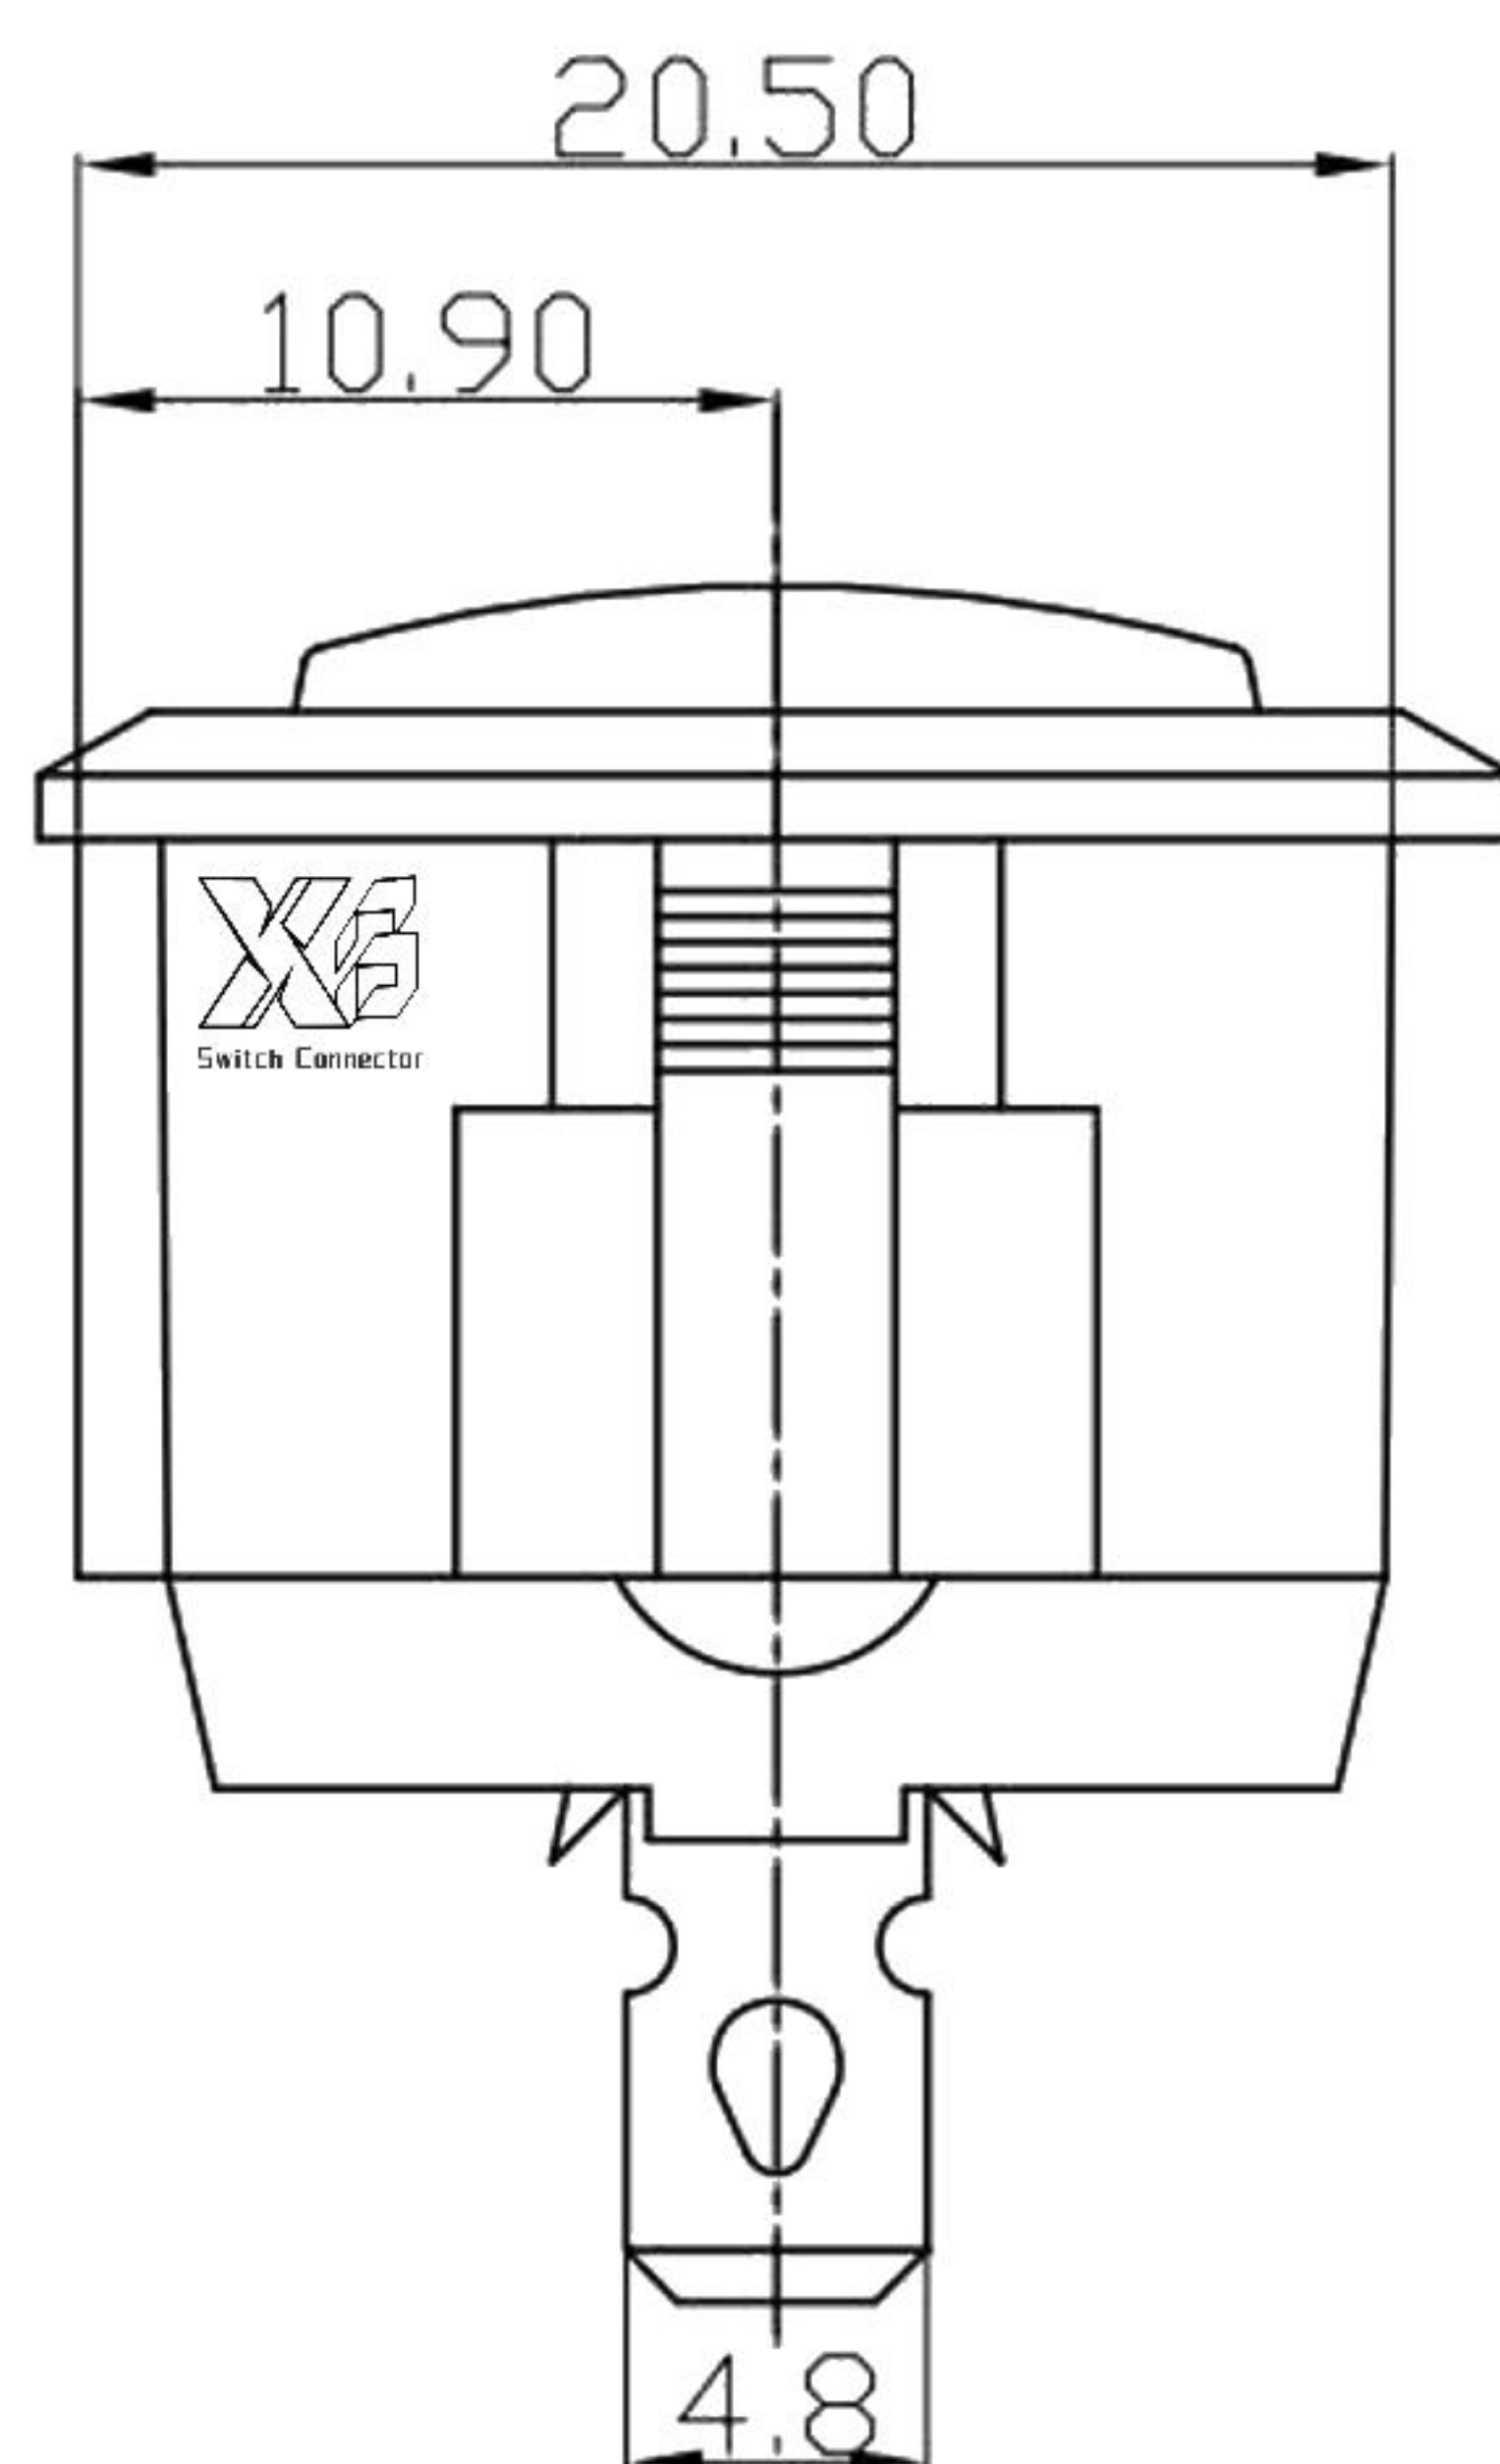


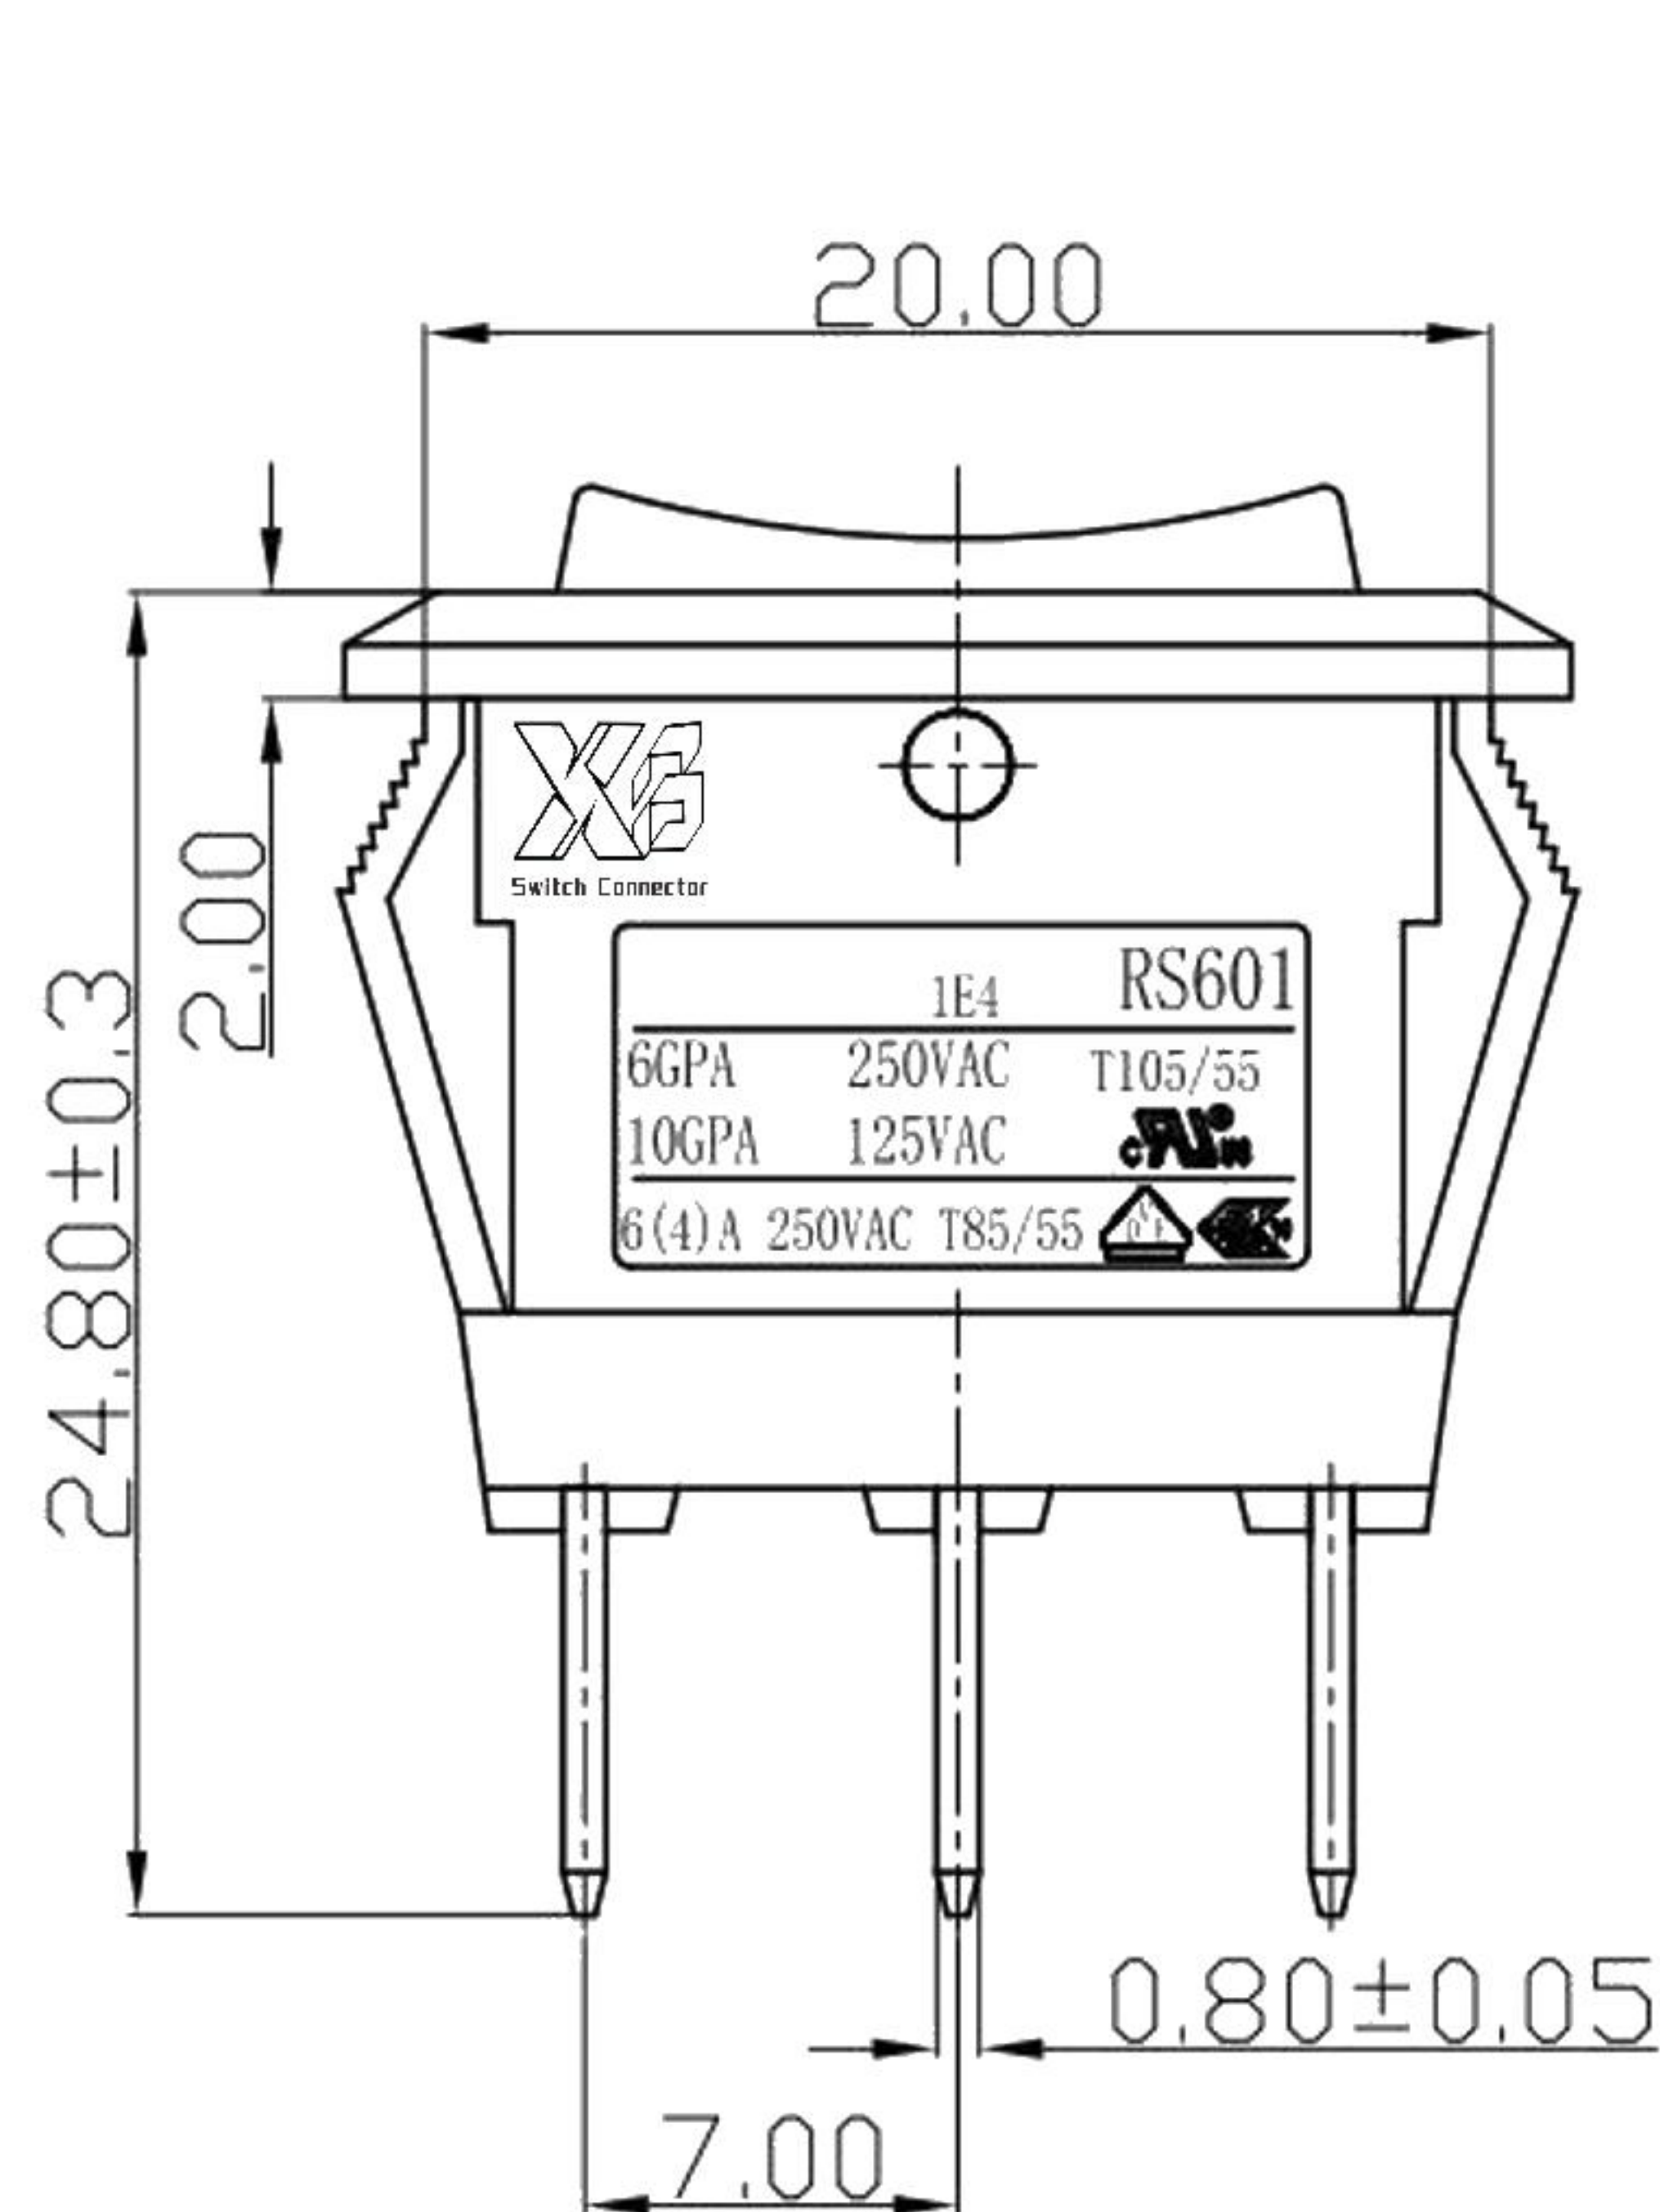

PANEL CUT-OUT		
Z	X	Y
0.80~1.50	19.90~20.10	19.3~19.5

NOTES:

1. Rating:

CQC 6A 250V AC T105/55

6(8)A 250VAC

8A/128A 250VAC

cUL 6GPA 250V AC

10GPA 125V AC T105/55

VDE ENEC 6(4)A 250V AC T85/55

KC 6(4)A 250V AC T85/55

2. Circuit Diagram: 3P ON-OFF-ON

3. Terminal Strength: $\geq 80N$



4. Electrical life: ≥ 10000 cycles

5. Withstand Voltage: Withstand Voltage: 1800VAC 1min
Terminals to Button: 3000VAC 1min
Leakage Current: 1mA

6. Current resistance: $\leq 50m\Omega$ (initial)

7. Insulation resistance: $\geq 100M\Omega$

8. Body Material: NYLON 66 94V-0~2

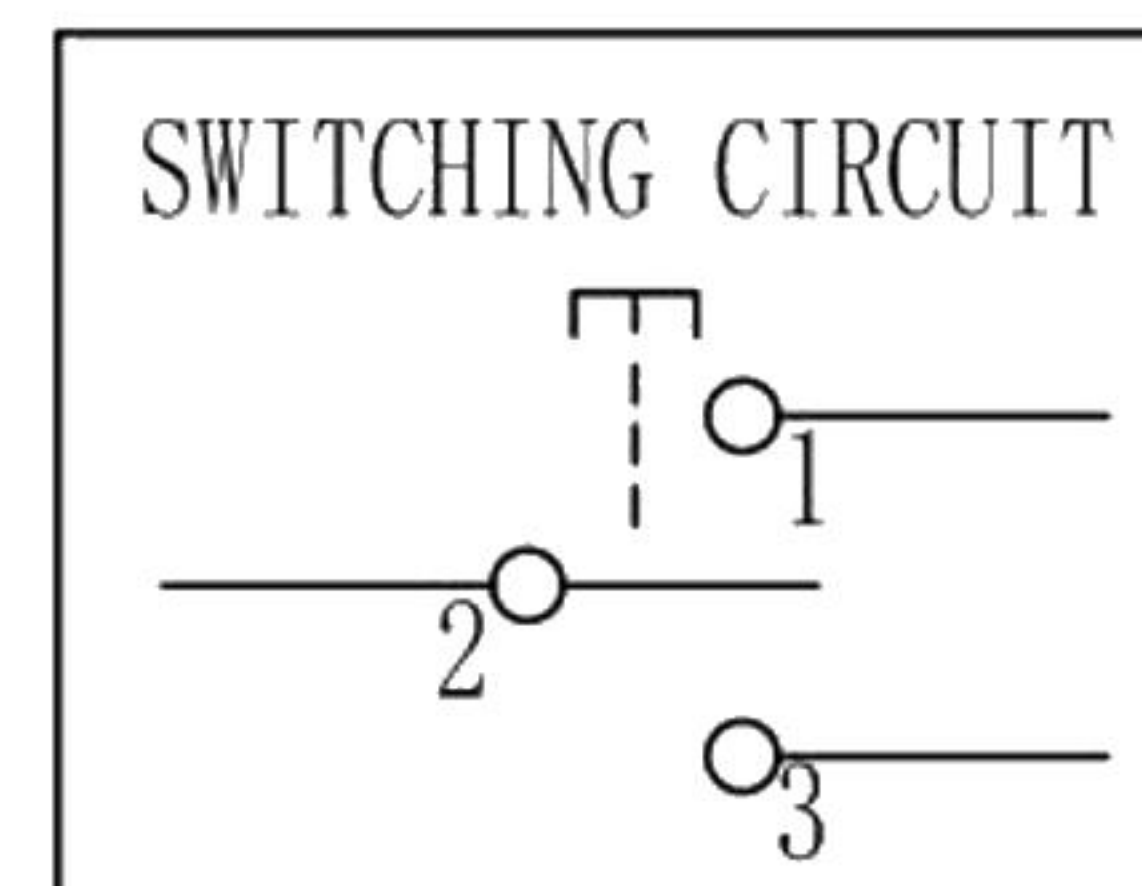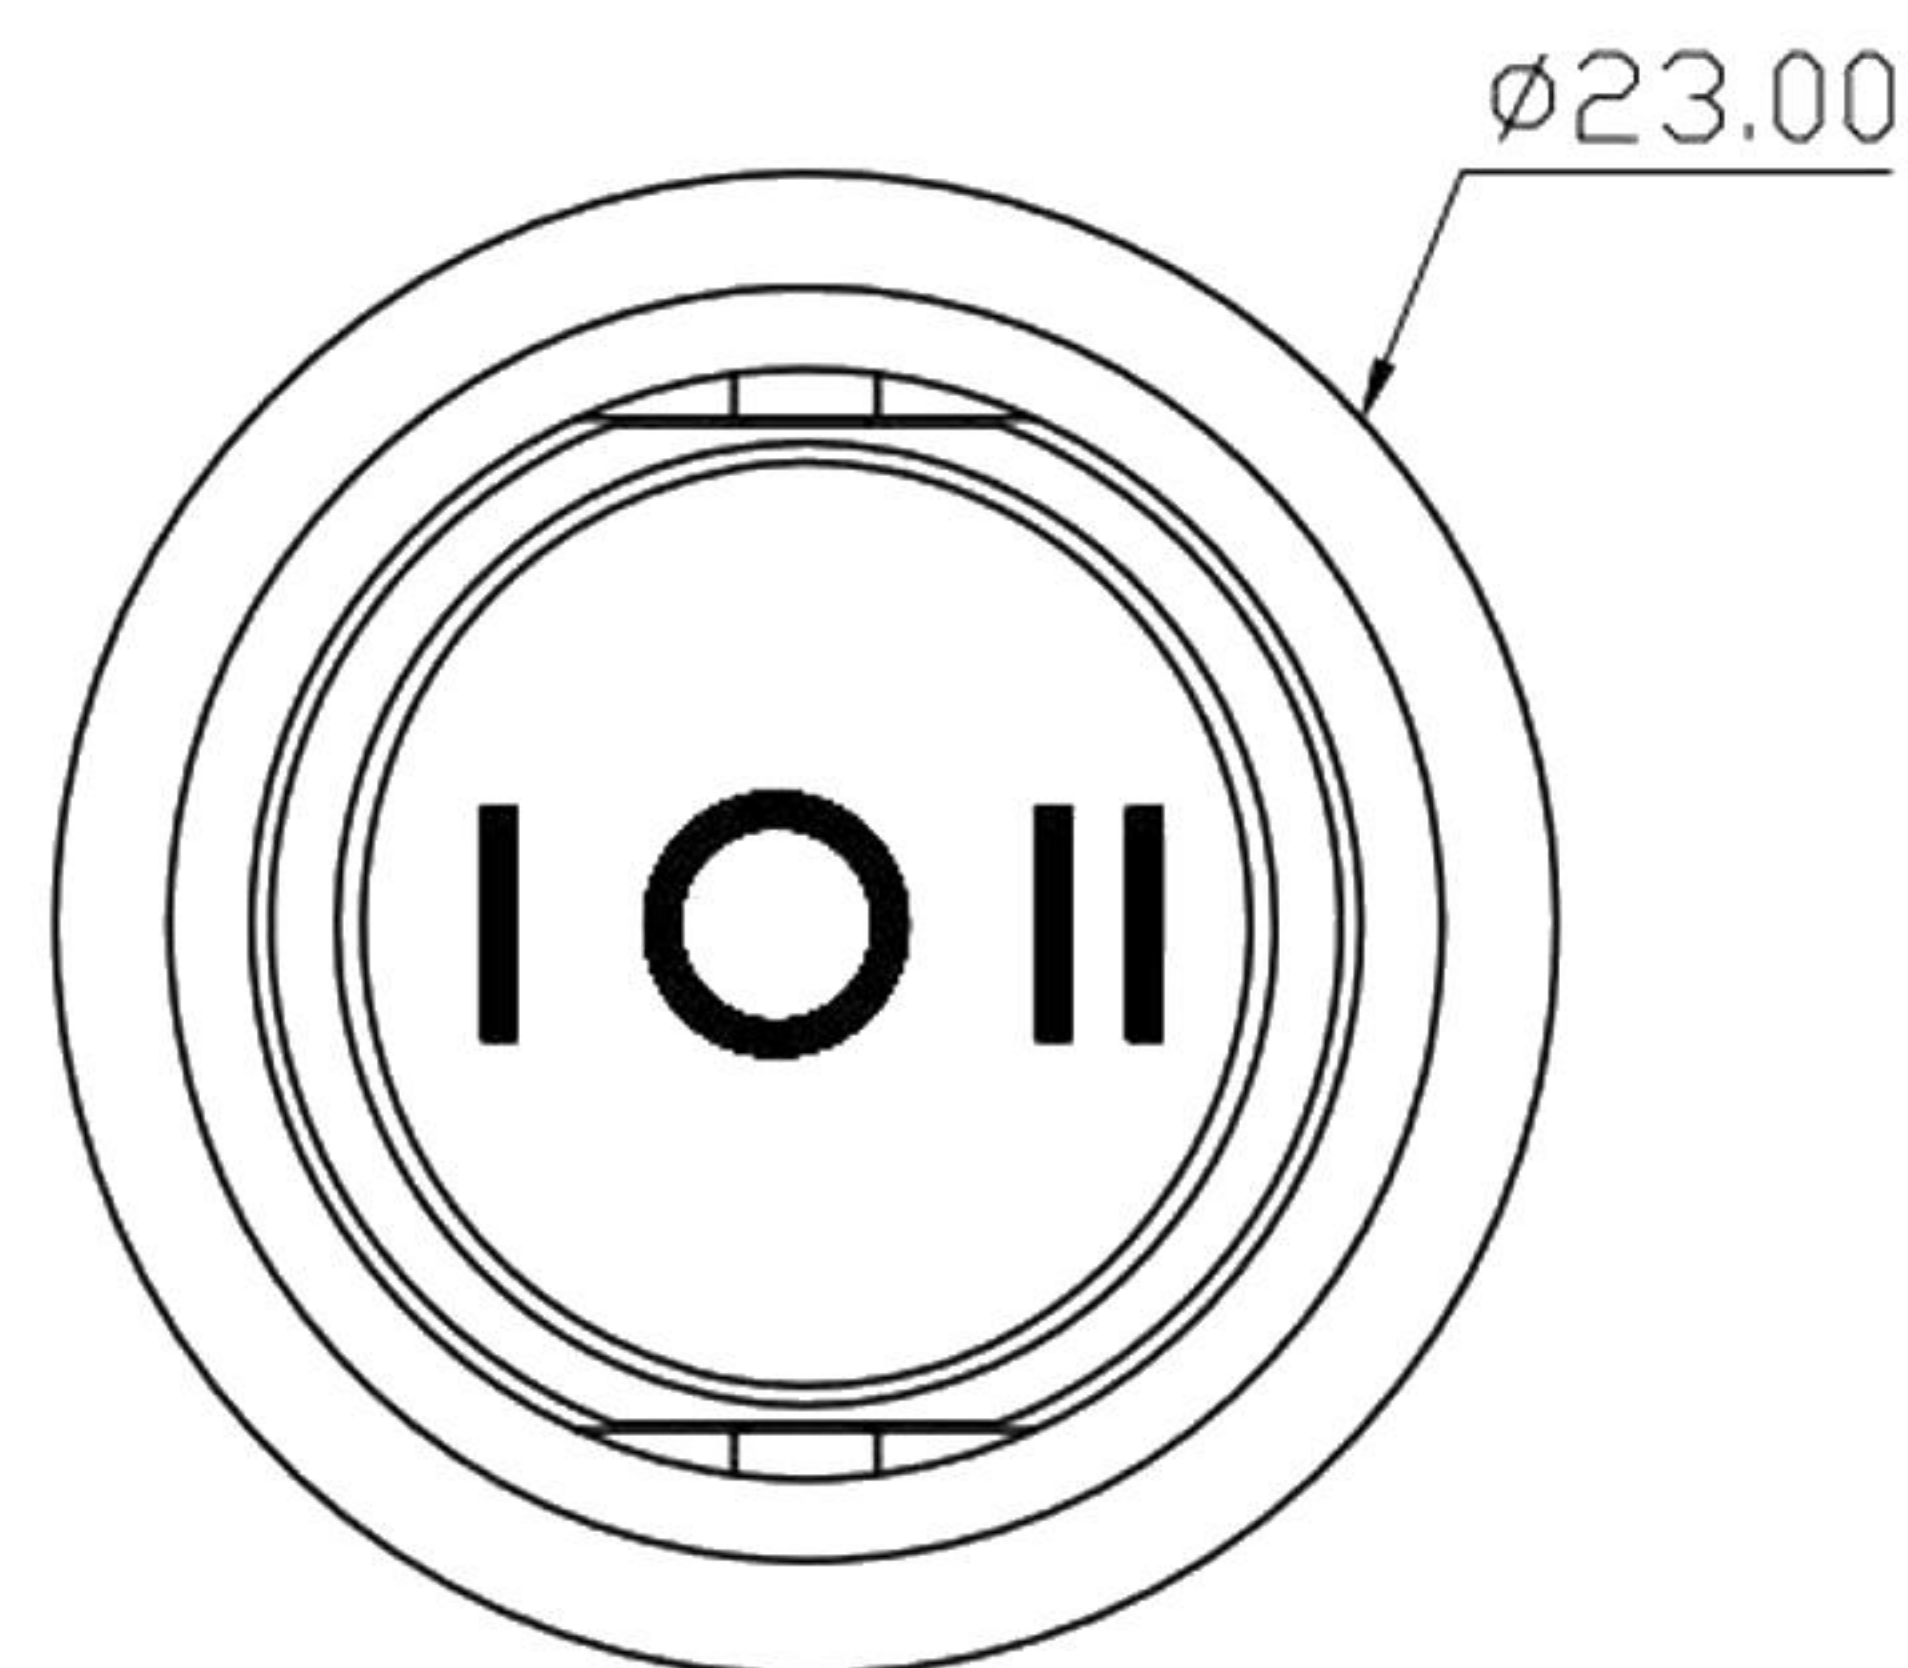

7	基座	1	环保阻燃PA66		
6	弯端	2	0.8mm黄铜带+复合银触点	镀锡	
5	中端	1	0.4mm黄铜带	镀锡	
4	接触桥	1	0.6mm黄铜带+复合银触点	镀银	
3	套管	1	0.3mm拉伸钢	镀镍	
2	弹簧	1	φ0.4mm弹簧钢丝	发黑	
1	按钮	1	环保阻燃PA66		
序号	名称	数量	材料	处理	备注

47*34*25cm箱, 100只*30袋装=3K件, 净重. 14.7 KG, 毛重. 17.2=KG,

A4				普通公差: COMMON TOLERANCE :		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
A3											
A2				UP TO 5	±0.20	单位	mm	投影	品名	跷板开关	比例
				ABOVE 5 TO 30	±0.30			PRODUCT NAME			Free
A1				ABOVE 30	±0.50	绘图	干方毅	核对	型号	RS601C-1030041BB-ZP	
				ANGULAR	±5°	DRAWN BY		CHECKED BY	图号		
REV.	DATE	REVISION DESCRIPTION	ISSUE			日期	2021.06.23	核准	周培雷	/RS601	
						DATE		APPROVAL BY			