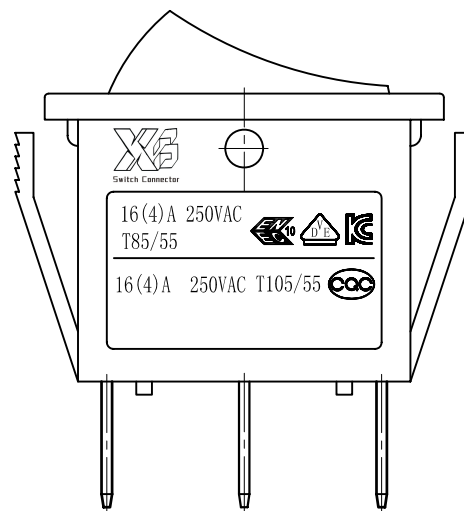
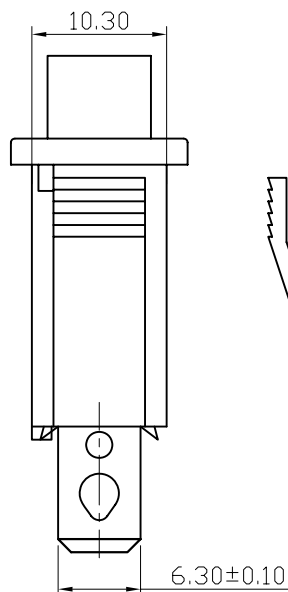
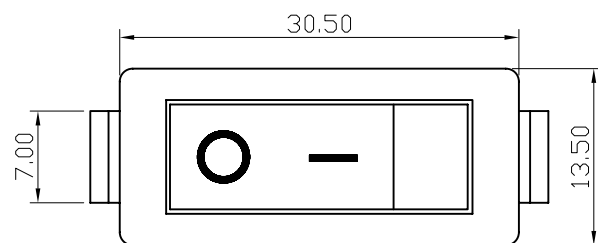
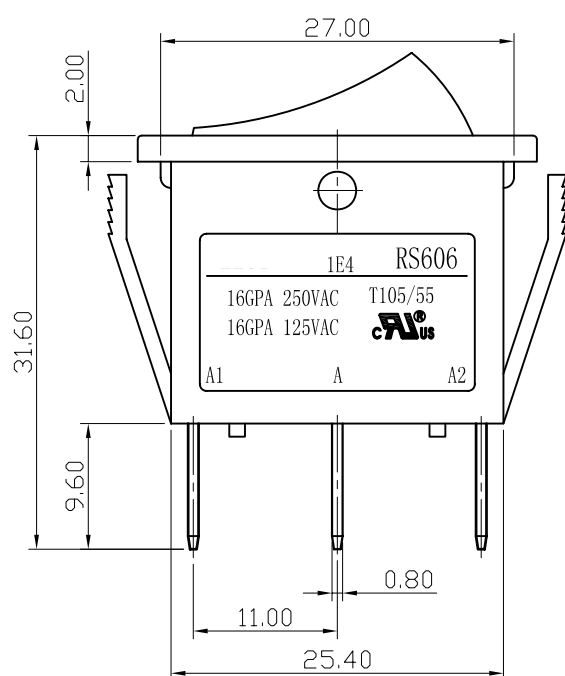


PANEL CUT-OUT		
Z	Y	X
0.70~1.25	10.50~10.70	28.9~29.1
1.25~2.00	10.50~10.70	29.1~29.2
2.00~3.00	10.50~10.70	29.2~29.3

NOTES:

1.Rating:

VDE ENEC 16(4)A 250V AC T85

KC 16(4)A 250V AC T85

CQC 16(4)A 250V AC T105/55

UL cUL 16GPA 125V AC/16GPA 250V AC T105/55

2.Circuit Diagram: 3P ON-OFF

3.Terminal Strength: ≥80N


4.Electrical life: ≥10000 cycles

5.Withstand Voltage: Withstand Voltage:1500VAC 1min Terminals to Button:3000VAC 1min Leakage Current:1mA

6.Current resistance: ≤50mΩ(initial)

7.Insulation resistance: ≥100MΩ

8.Body Materil: NYLON 66 94V-0~2 100/PCS袋装 =2K箱



A4				普通公差:		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	跷板开关	比 例 SCALE	Free
A1				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	周金勇	核 对 CHECKED BY	梁金勇	型 号 MODEL NO.	RS606-1020011CBB-ZP		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ABOVE 30	±0.50	日 期 DATE	2015.8.17	核 准 APPROVAL BY	周培雷	图 号 DWG NO.	RS606		
				ANGULAR	±5°								