


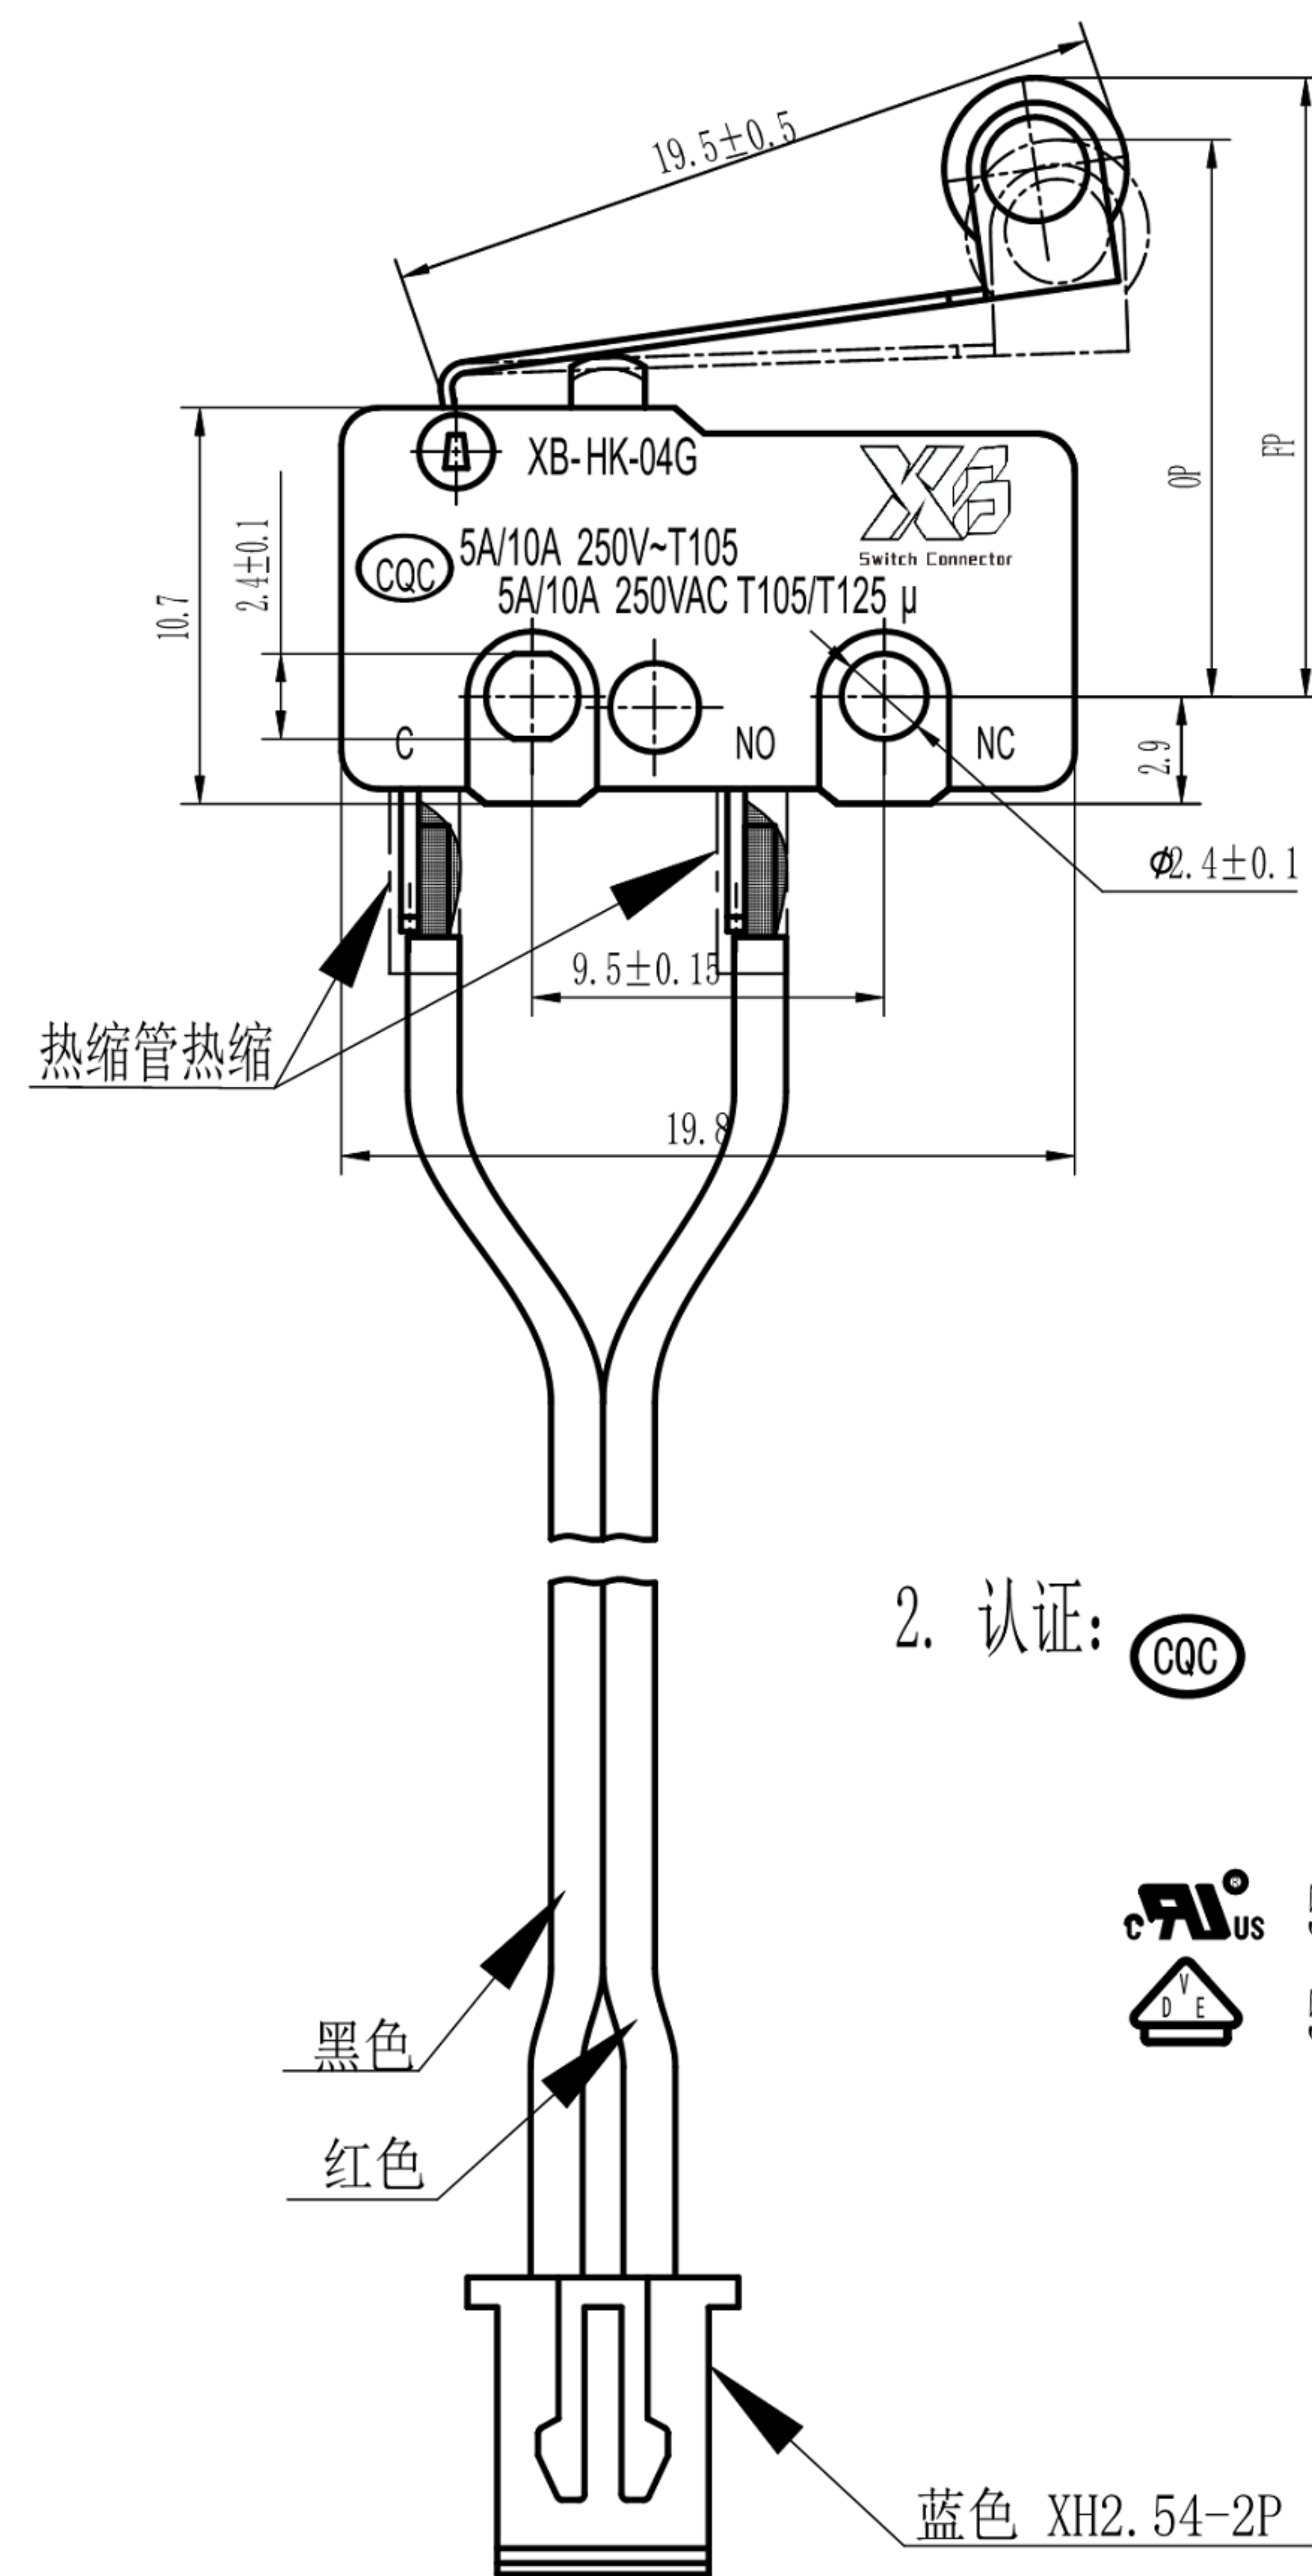


2. 认证:

5A/10A 250V~ T105
5A/10A 250VAC T105/T125 μ

5A 125V~ T105 μ

5(1)A 250V~ 25T105 μ

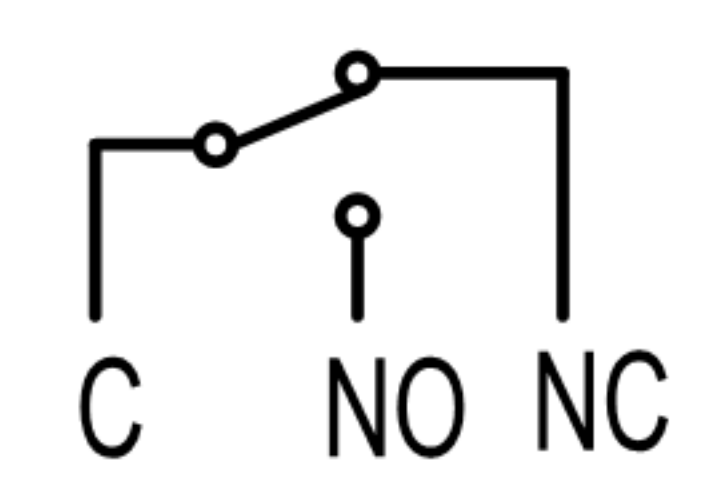

SCHEMATIC

1. 技术参数 (Technical Parameters)

序号	主要技术参数(Main Technical Parameters)
1	电气额定值: 5A/10A 250VAC
2	温度等级: T105
3	接触电阻: ≤50mΩ(不带线)
4	操作力(OF): ≥0.25N
5	自由位置 (FP) : 17.1±1.5mm
6	动作位置 (OP) : 15.5±1.5mm
7	绝缘电阻: ≥100MΩ (试验电压 500VDC)
8	电气寿命(Electrical lifetime): Min.10000 cycles
9	耐压: 端一端500VAC/60S;端一壳1500VAC/60S, 漏电流5mA.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Micro SWitch			UNIT : mm	DRWG NO.: XB-HK-04G-1AD-262
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED					CHK'D DONG. PANG 2012-9-25
1	NOB	PPA	1	BLACK					APPD. ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.				