


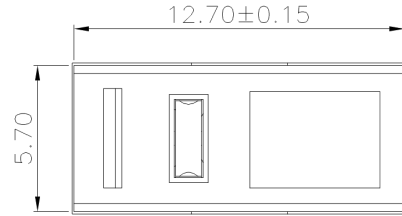
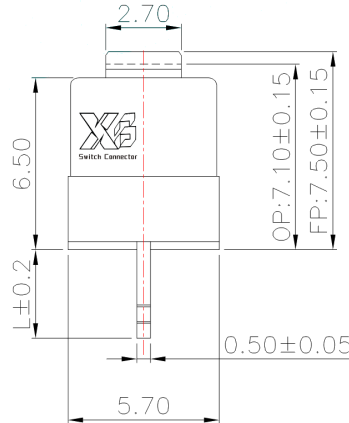
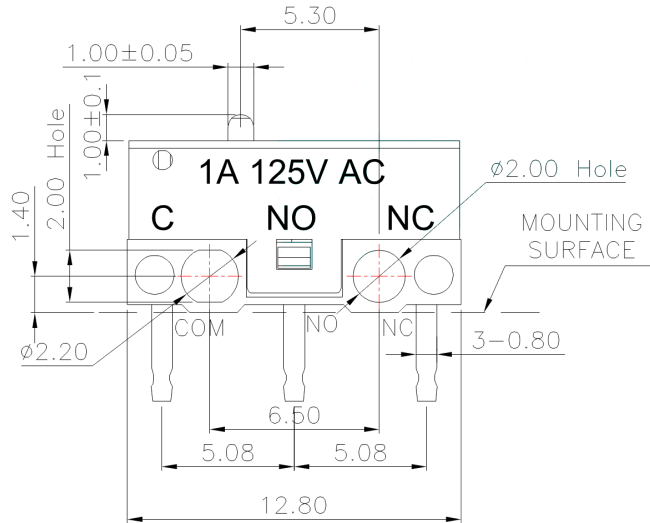


Circuit Diagram



P.C.B layout



L	PART NO.
3.00	K9-1267T
3.40	K9-1267T-01
4.50	K9-1267T-02
5.40	K9-1267T-03
7.45	K9-1267T-04
11.8	K9-1267T-05

NOTE:

- 1.Rating:DC30V 1A
- 2.OP:7.10±0.15
- 3.Operating froce:80±15gf
- 4.Mechanical Life:1,000,000

⑥	Shrapnel	—	1	Beryllium Copper	—	—
⑤	Contact	—	1	Silver Alloy	—	—
④	Terminal	—	3	Brass(0.52t)	Plating silver	—
③	Housing	—	1	PBT	White	—
②	Knob	—	1	PBT	White	—
①	Cover	—	1	PBT	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

CHECKED		TITLE:	MICRO SWITCHS
APPROVALS		PART NO.	
TOLERANCES ARE	30~8L ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10	ANGLE ±2°	UNIT: mm SCALE: 1:1 DRAWING NO.
PROJECT		SCALE: 1:1	PROJ: 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			