
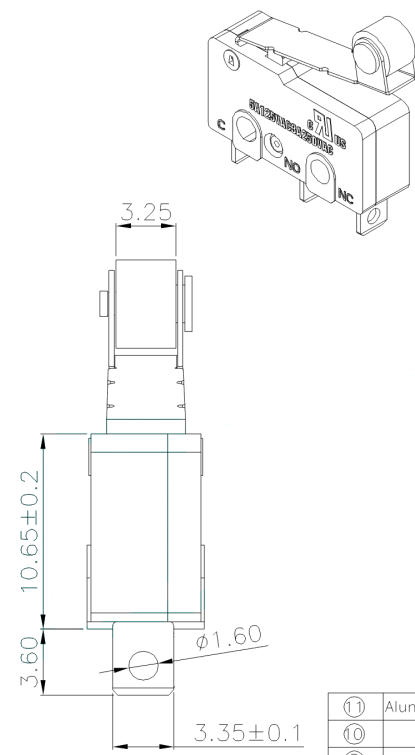
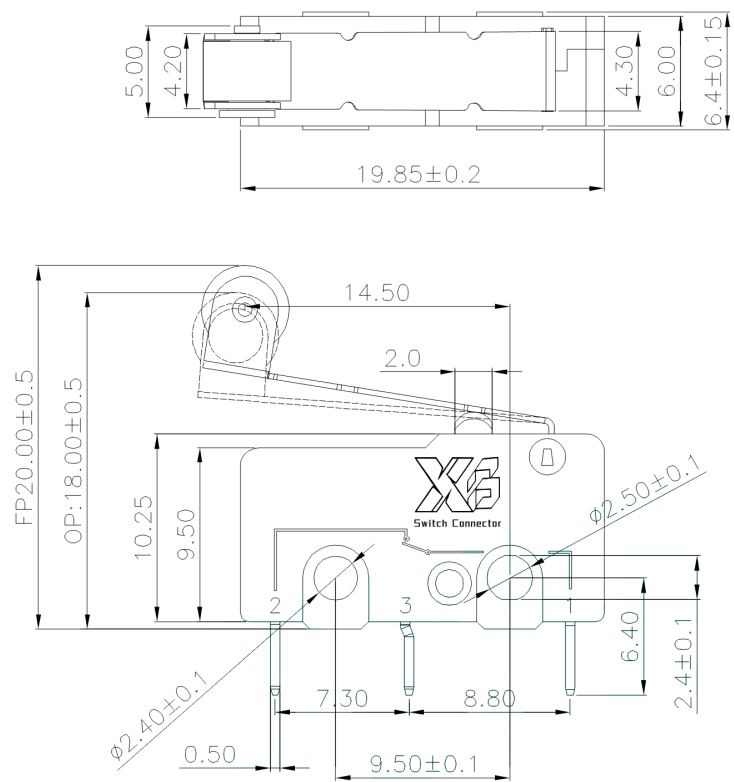


NOTE:
1.Rating:AC125V 5A/250V 3A
2.Operating force:30±10gf
3.Mechanical Life:1,000,000
3.Electrical Life:6000-10,000



Circuit Diagram

⑪	Aluminum rivet	—	1	Aluminum Alloy	—	—
⑩	Spindle	—	1	Brass	Plating Nicke	—
⑨	Roller	—	1	Brass	Plating Nicke	—
⑧	Shrapnel 2	—	1	Copper Alloy	—	—
⑦	Shrapnel 1	—	1	Beryllium Copper	—	—
⑥	Contact	—	1	Copper Alloy	Plating silver	—
⑤	Lever	—	1	Stainless Steel	—	—
④	Terminal	—	3	Copper Alloy	Plating silver	—
③	Housing	—	1	PBT	Black	—
②	Knob	—	1	PBT	Black	—
①	Cover	—	1	PBT	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

CHECKED		TITLE:	MICRO SWITCHES
APPROVALS		PART NO.	K9-1910F
TOLERANCES ARE	30~40 ±0.30 10~20 ±0.25 5~10 ±0.20 ~ 5 ±0.20	ANGLE	UNIT: mm SCALE: 1:1 DRAWING NO.
			PROJ: 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			