

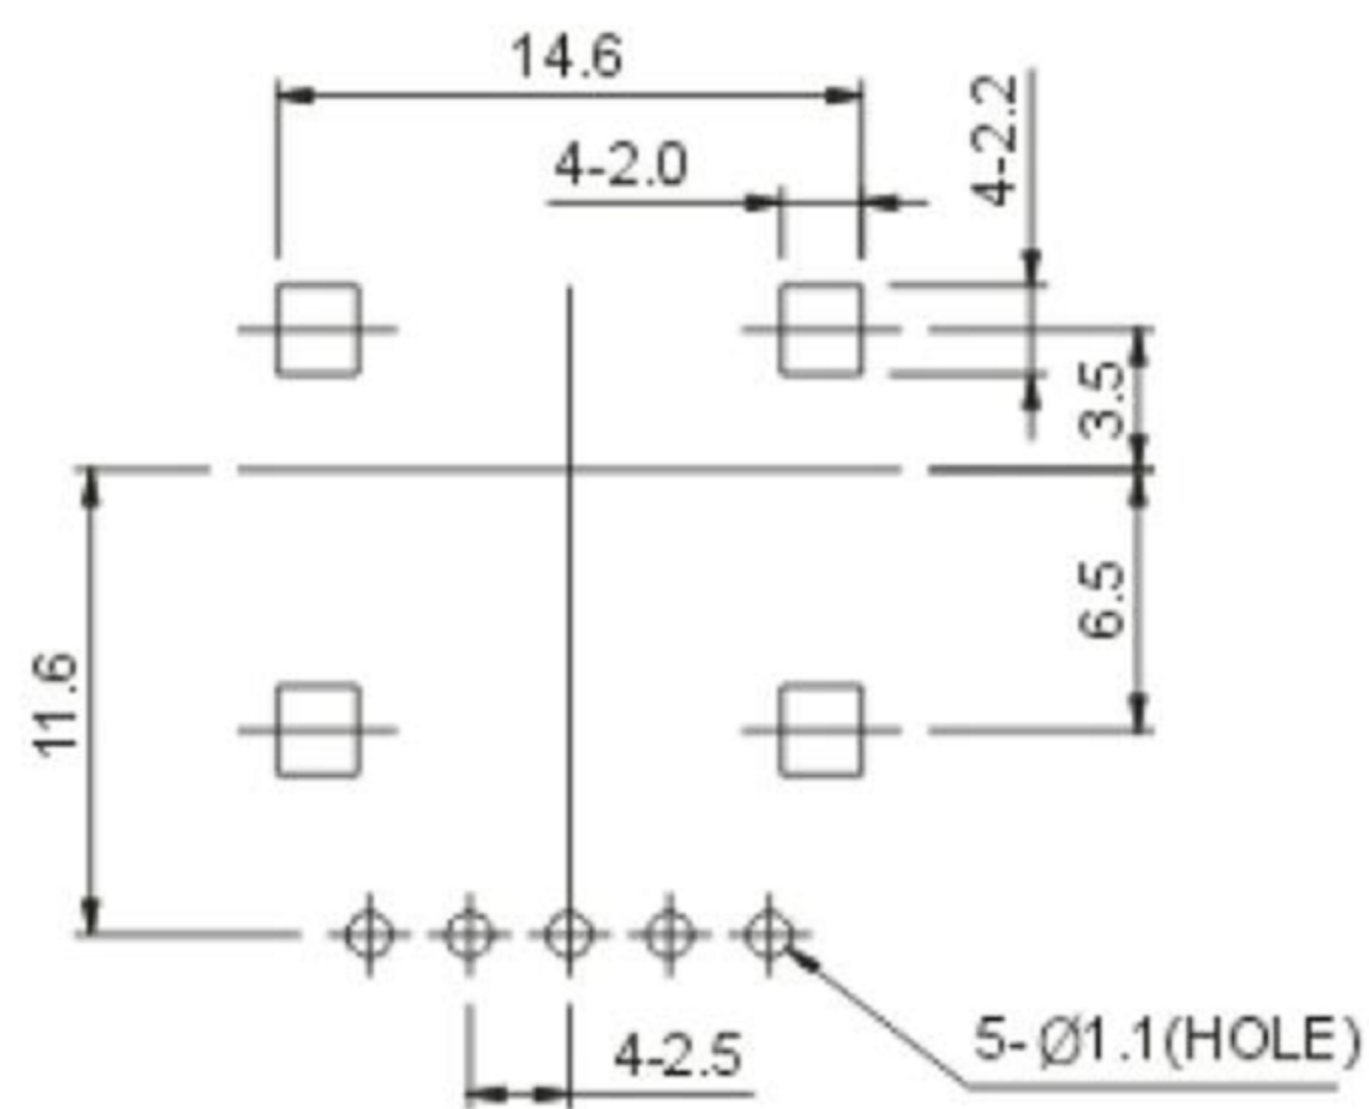


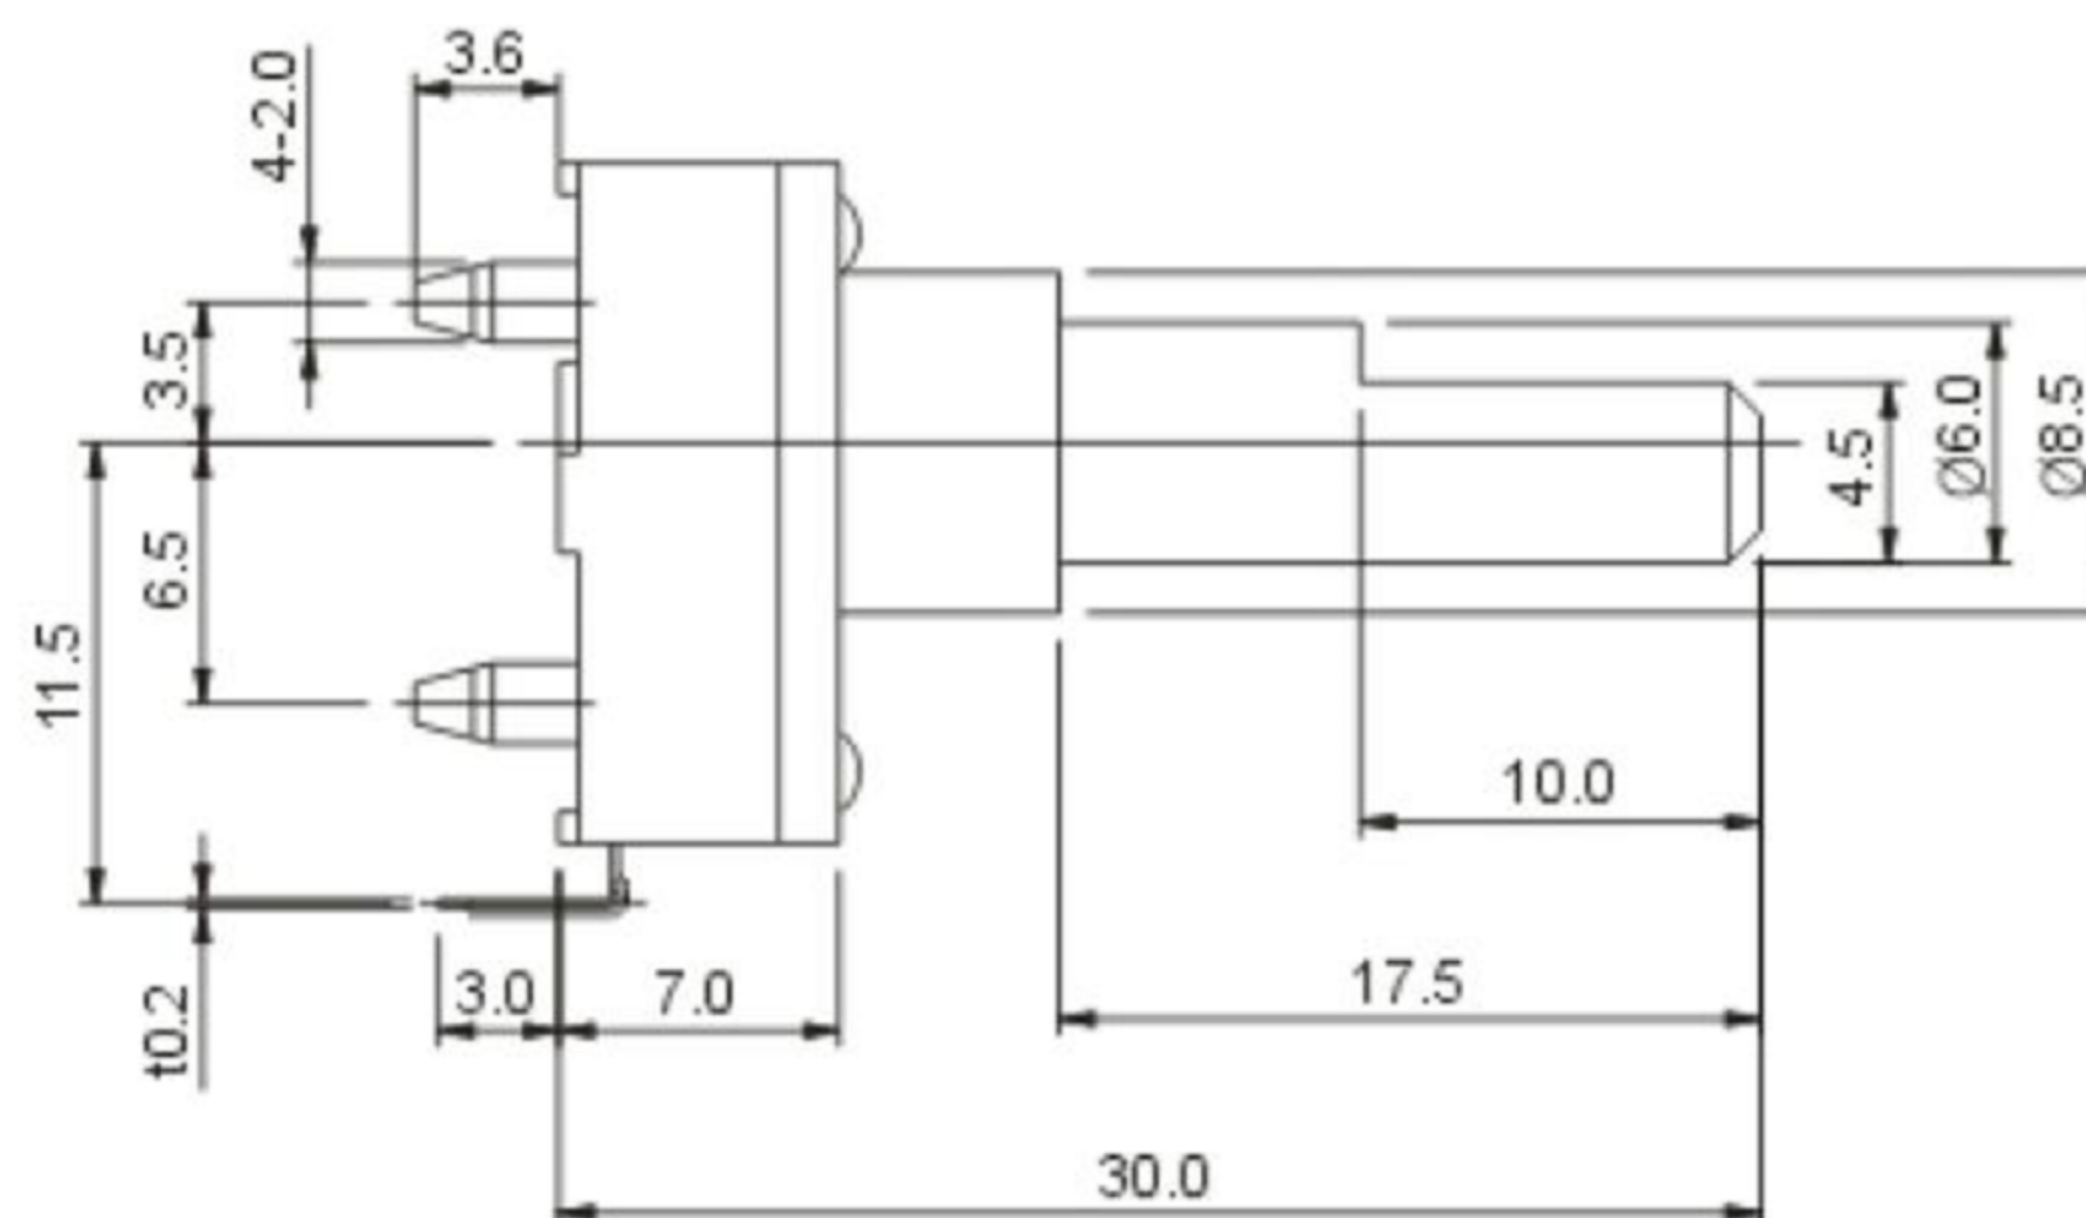

CAD FILE:

ROHS

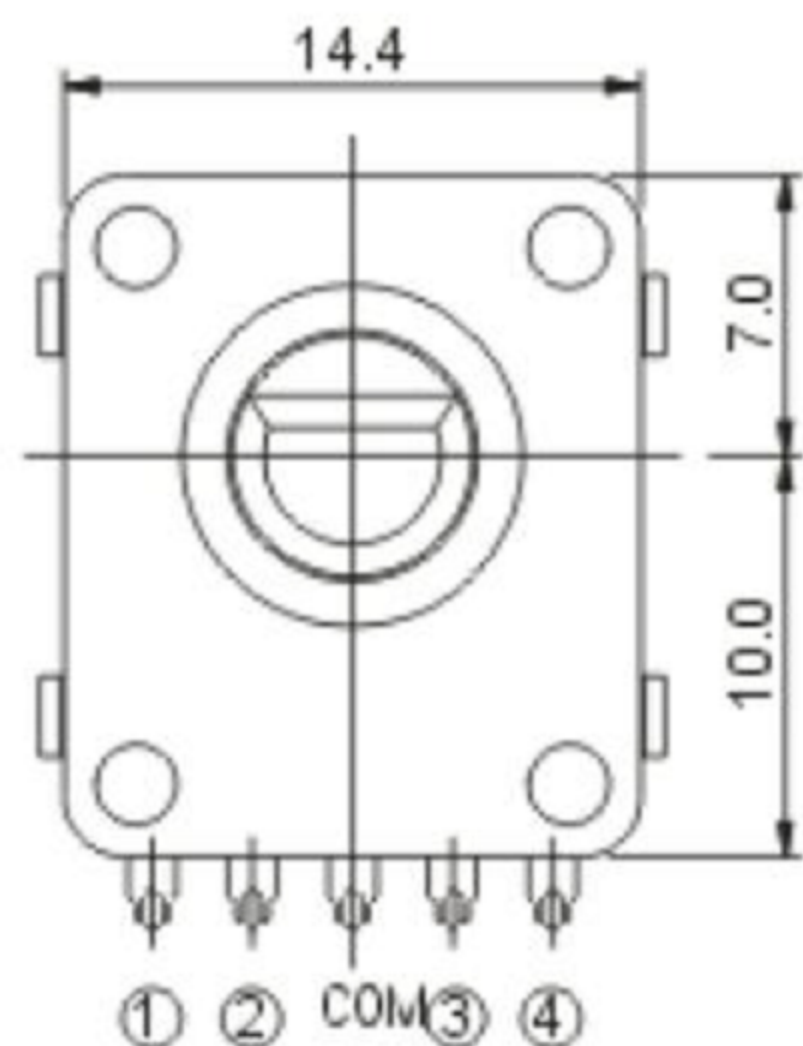

P.C.B HOLE DIMENSION

※ O: ON X: OFF

Shaft Position Terminal	0	1	2	3	4	5	6	7	8	9	10
Terminal 1	X	O	O	O	X	X	X	X	X	X	X
Terminal 2	O	O	O	X	X	O	O	O	X	X	X
Terminal 3	X	X	O	O	O	O	O	X	X	O	X
Terminal 3	X	X	X	X	X	X	O	O	O	O	X

1. Rating: DC 28V 10mA
2. Contact Resistance: 30mΩ
3. Total Rotation Angle: 210
4. Step Angle: 30 Haw.
5. Rotation Torque: 200gf 100gf.cm
6. Operating Life: 30,000Cycles
7. Circuit: 4Bit

8					TOLERANCE					
7					UNLESS SPECIFIED					
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Encoder Swith			UNIT : mm	DRWG NO.: XB-JES-1411	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-JES-1411			SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED						2012-9-25
1	KNOB	PPA	1	BLACK					CHK'D	DONG. PANG
										2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					APPD.	ZENQ. CHEN
										2012-9-25