


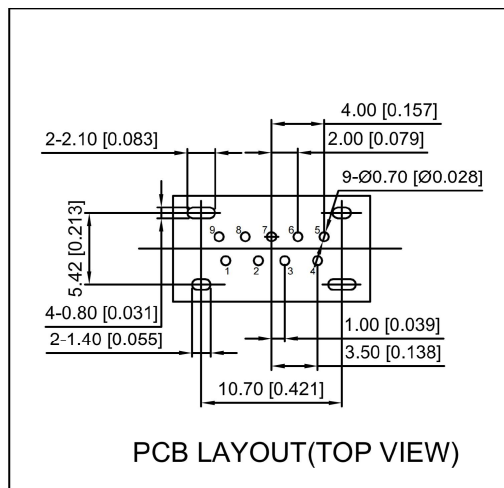


Operating Temperature 工作温度:-40 °C+85 °C

1: Au 1U"
5: Au 15U"
6: Au 30U"
B: BLACK
W: WHITE
BL: BLUE
S: Scrolls F: Flat

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+

ITEM	PART NAME	Material	Q'TY	REMARK
1	4P Semi-manufactured Goods	Housing LCP	1	Blue UL94V-0
2		Contact COPPER ALLOY	4	T=0.25 Plating Gild/Ti
3	5P Semi-manufactured Goods	Housing LCP	1	Blue UL94V-0
4		Contact COPPER ALLOY	5	T=0.25 Plating Gild/Ti
5	Shell	Stainless Steel	1	T=0.3

				ANGULAR	±5°		DSND		SCALE: N/A	MODEL TYPE: USB 3.0
				L ≤ 4	±0.2		DWN		VIEW: 	PART NO.:
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:
				16 < L ≤ 63	±0.4		APPD		SIZE: A4	U231-09XN-4BLCC14-S5
				L > 63	±0.5					REVISION
				UNSPECIFIED TOLERANCES						SHEET 1/1
							DONG GUAN XI BANG ELECTRONIC CO., LTD			A0
www.alpsr.com www.gdxdz.com www.xbswitch.com										