

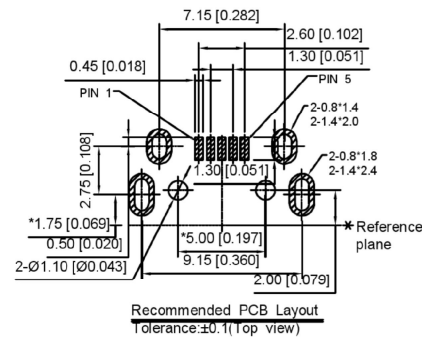
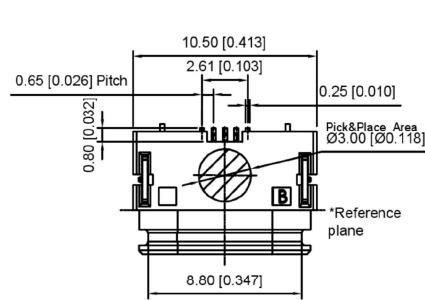
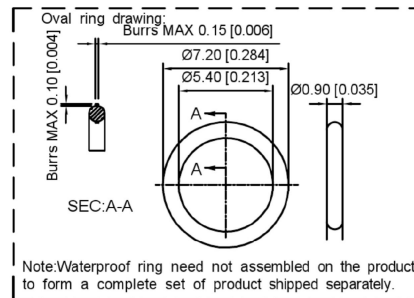

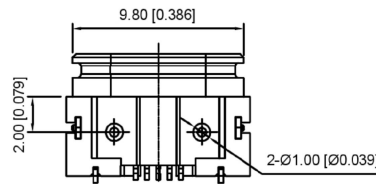
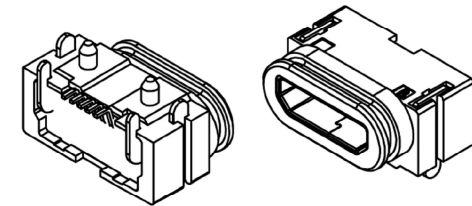
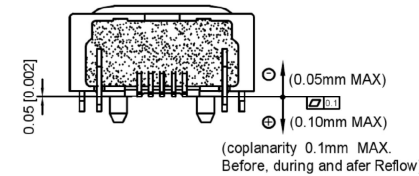


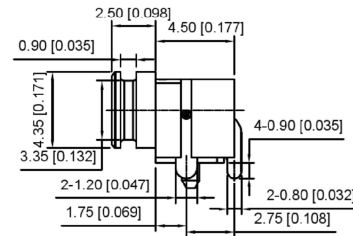

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 1.8A (PIN 1/5), 0.5A (PIN 2/3/4)
 - CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
 - MECHANICAL CHARACTERISTICS:
 - 2-2 INSERTION FORCE: 3.6 KGf(MAX)
 - 2-2 WITHDRAWAL FORCE: 0.8 KGf(Reference)
 - DURABILITY: 10,000 CYCLES
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7(1m,30min)
 - PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
 - OVALRING
 - The amount of low molecular siloxanes(D3-D10) is less than 200ppm
 - Hardness of silicone rubber: 70°
 - Horizontal flash 0.1max; Longitudinal flash 0.10max
 - BODY WITH O-RING'S SEAL AREA BURRS IS 0.05mm Max.
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 - PACKAGING: TAPE & REEL.

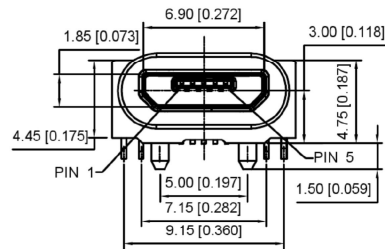

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

ITEM	PART NAME	QTY	MATERIAL	FINISHING
④	Contact	5	C18140H T=0.20	
③	Shell	1	SUS304 T=0.25	Nickel
②	Terminal	2	C2680 T=0.3	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

							DSND		SCALE: N/A	MODEL TYPE: MICRO USB				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4<L ≤ 16	±0.3		APPD		SIZE: A4	U-E-M7SS-Y-0				
				16<L ≤ 63	±0.4									
				L > 63	±0.5									
				DATE	REVISED	APPROVED								
REVISIONS						UNSPECIFIED TOLERANCES								
www.alpsr.com www.gdxjdz.com www.xbsswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD						WEIGHT	SHEET	REVISION
													1/1	A0