
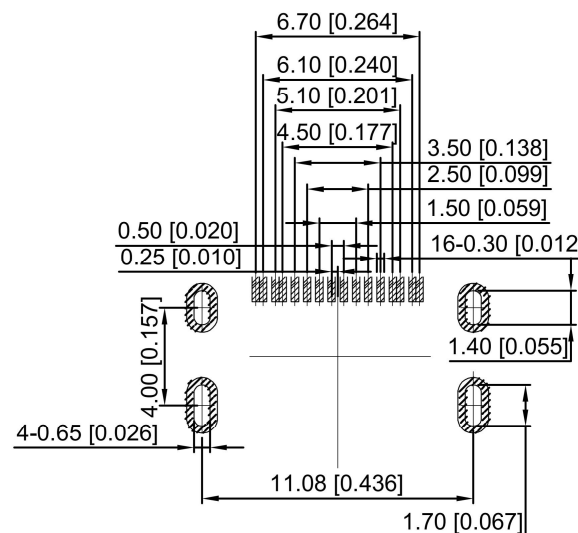
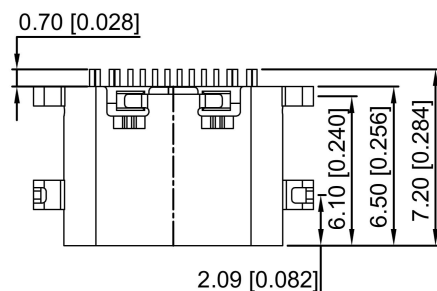
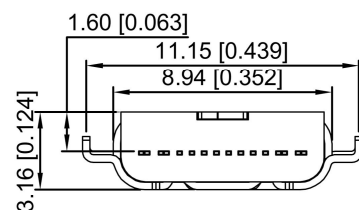
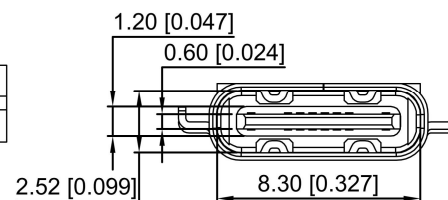



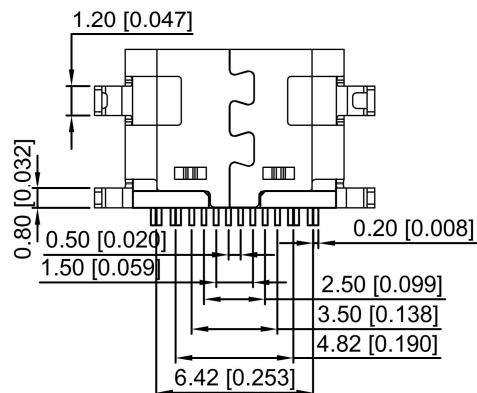

SPECIFICATION:

1. Material

Housing Material:High temperature thermoplastic
Contact Terminal:High Grade Copper Alloy
Merallic Shell:Stainless Steel
Inner Ground Cover Shell:Stainless Steel
Mid Plate:Stainless Steel

2. Mechanical:

- 2.1.Mating force:5-20Nf;
- 2.2.Unmating force:Initial:8-20Nf;Final:6-20Nf;
- 2.3.Durability:5000 Cycles;


3. Electrical:

- 3.1.Current Rating:3A
- 3.2.Voltage Rating:20V Max.;
- 3.3.Dielectric Withstanding volage:100Vac,60S,10mA;
- 3.4.Contact resistance:40m Ohms Max.;
- 3.5.Insulation Resistance:100M Ohms Min.;

4.Environmental:

- 4.1.Operating temperature:-40°C~+85°C;
- 4.2.Salt Spray Test:24H Min.(No oxidation or rust);

U262-16XN-4BC21665

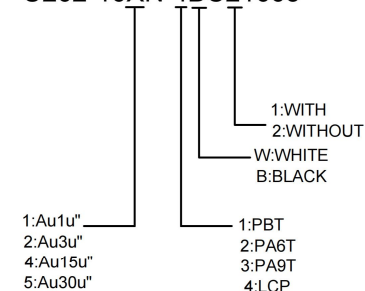

							DSND		SCALE: N/A	MODEL TYPE: 3.1 TYPE C		
							DWN		VIEW: 	PART NO.:		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4	U262-16XN-4BC21665		
							DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
REVISIONS						UNSPECIFIED TOLERANCES				1/1	A0	
www.alpsr.com www.gdxjdz.com www.xbswitch.com												