


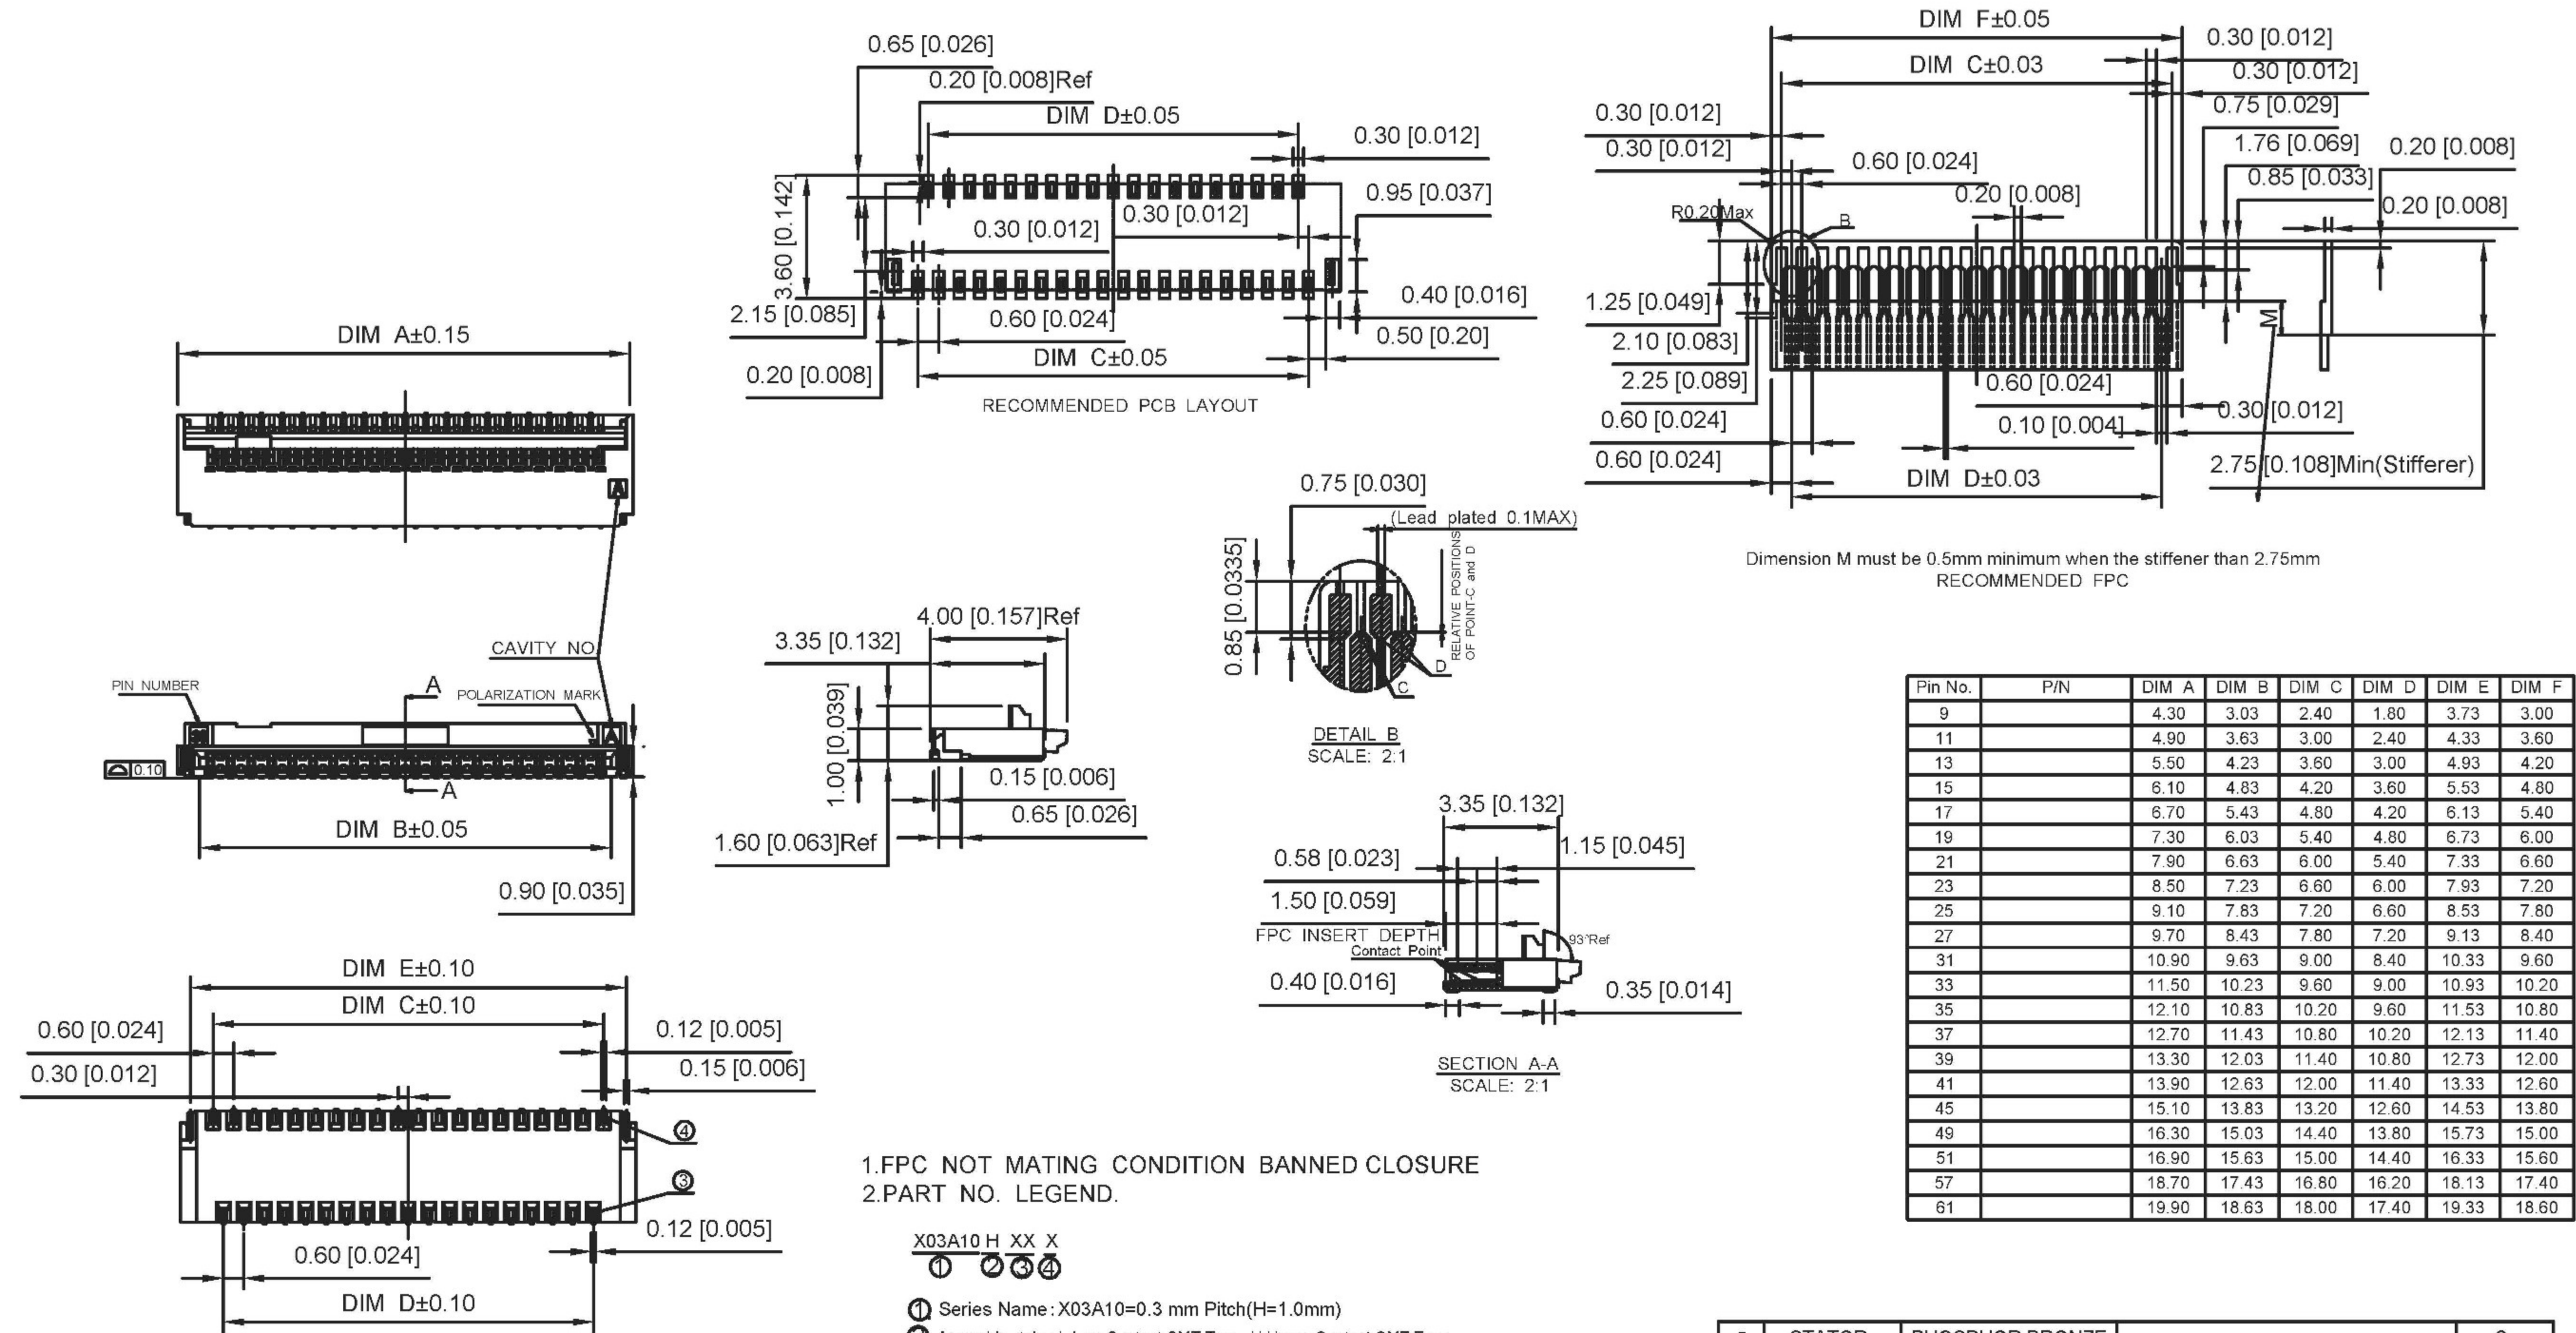

1.FPC NOT MATING CONDITION BANNED CLOSURE
2.PART NO. LEGEND.

X03A10 H XX X
① ② ③ ④

- ① Series Name : X03A10=0.3 mm Pitch(H=1.0mm)
② Assembly style : L:Low Contact SMT Type U:Upper Contact SMT Type
D:Double-Face Contact SMT Type H:Back-flip Double-Face Contact SMT Type
③ Number of terminals :XX=09-61PIN
④ Plating : G:Gold Flash Over Nickel T:Tin Over Nickel

3.PERFORMANCE:

- 3.1: CURRENT RATING:0.2A/PIN
3.2: VOLTAGE RATING:30V(AC/DC)
3.3: CONTACT RESISTANCE: INITIAL VALUE 100mOHM Max.
3.4:INSULATION RESISTANCE:50MOHM Min.
3.5:DIELERIC WITHSTANDING VOLTAGE:100V AC FOR 1MINUTE
3.6:DURABILT: 20 TIMES Min
3.7:OPERATING TEMPERATURE:-40℃ ~85℃
OPERATING HUMIDITY RANGE:20% TO 85%

5	STATOR	PHOSPHOR BRONZE		2
4	TERMINAL II	PHOSPHOR BRONZE		POSITION
3	TERMINAL I	PHOSPHOR BRONZE		POSITION
2	COVER	ERMOPLASTIC UL94V-0	BLACK	1
1	HOUSING	THERMOPLASTIC UL94V-0	NATURAL	1
NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY

							DSND		SCALE: N/A	MODEL TYPE: FPC CONNECTOR			
							DWN		VIEW: 	PART NO.: XB-X03A10H			
							CHKD		UNIT: mm/in	DWG NO.:			
							APPD		SIZE: A4				
REVISIONS						UNSPECIFIED TOLERANCES			WEIGHT			SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD						1/1	A0