




Specifications(规格):
Voltage rating(额定电压):500V AC/DC
Current rating(额定电流):2A AC/DC
Withstanding voltage(耐压值):1500V AC/minute
Temperature range(工作温度):-40℃~+85℃
Insulation resistance(绝缘电阻):1000MΩ
Contact resistance(接触电阻):<30mΩ
After environmental testing(环境测试后):≤40mΩ

X3700T X-P SN X-X
① ② ③ ④ ⑤ ⑥ ⑦

- ① 系列
② 类别: T-端子
③ 外观形态: 空码-普通脚
④ 材质: P-磷铜
⑤ 电镀类别: G**-镀金 V**-镀全金
*01-Gold Flash *02-2u" *03-3u" *05-5u"
*10-10u" *15-15u" *30-30u" *50-50u"
SN-镀亮锡(70-120u") SN1-镀亮锡(120u"Min.)
0-素材 SW-镀雾锡
⑥ 电镀方式: 空码-先冲后镀
⑦ 模号/MARK及特殊码:

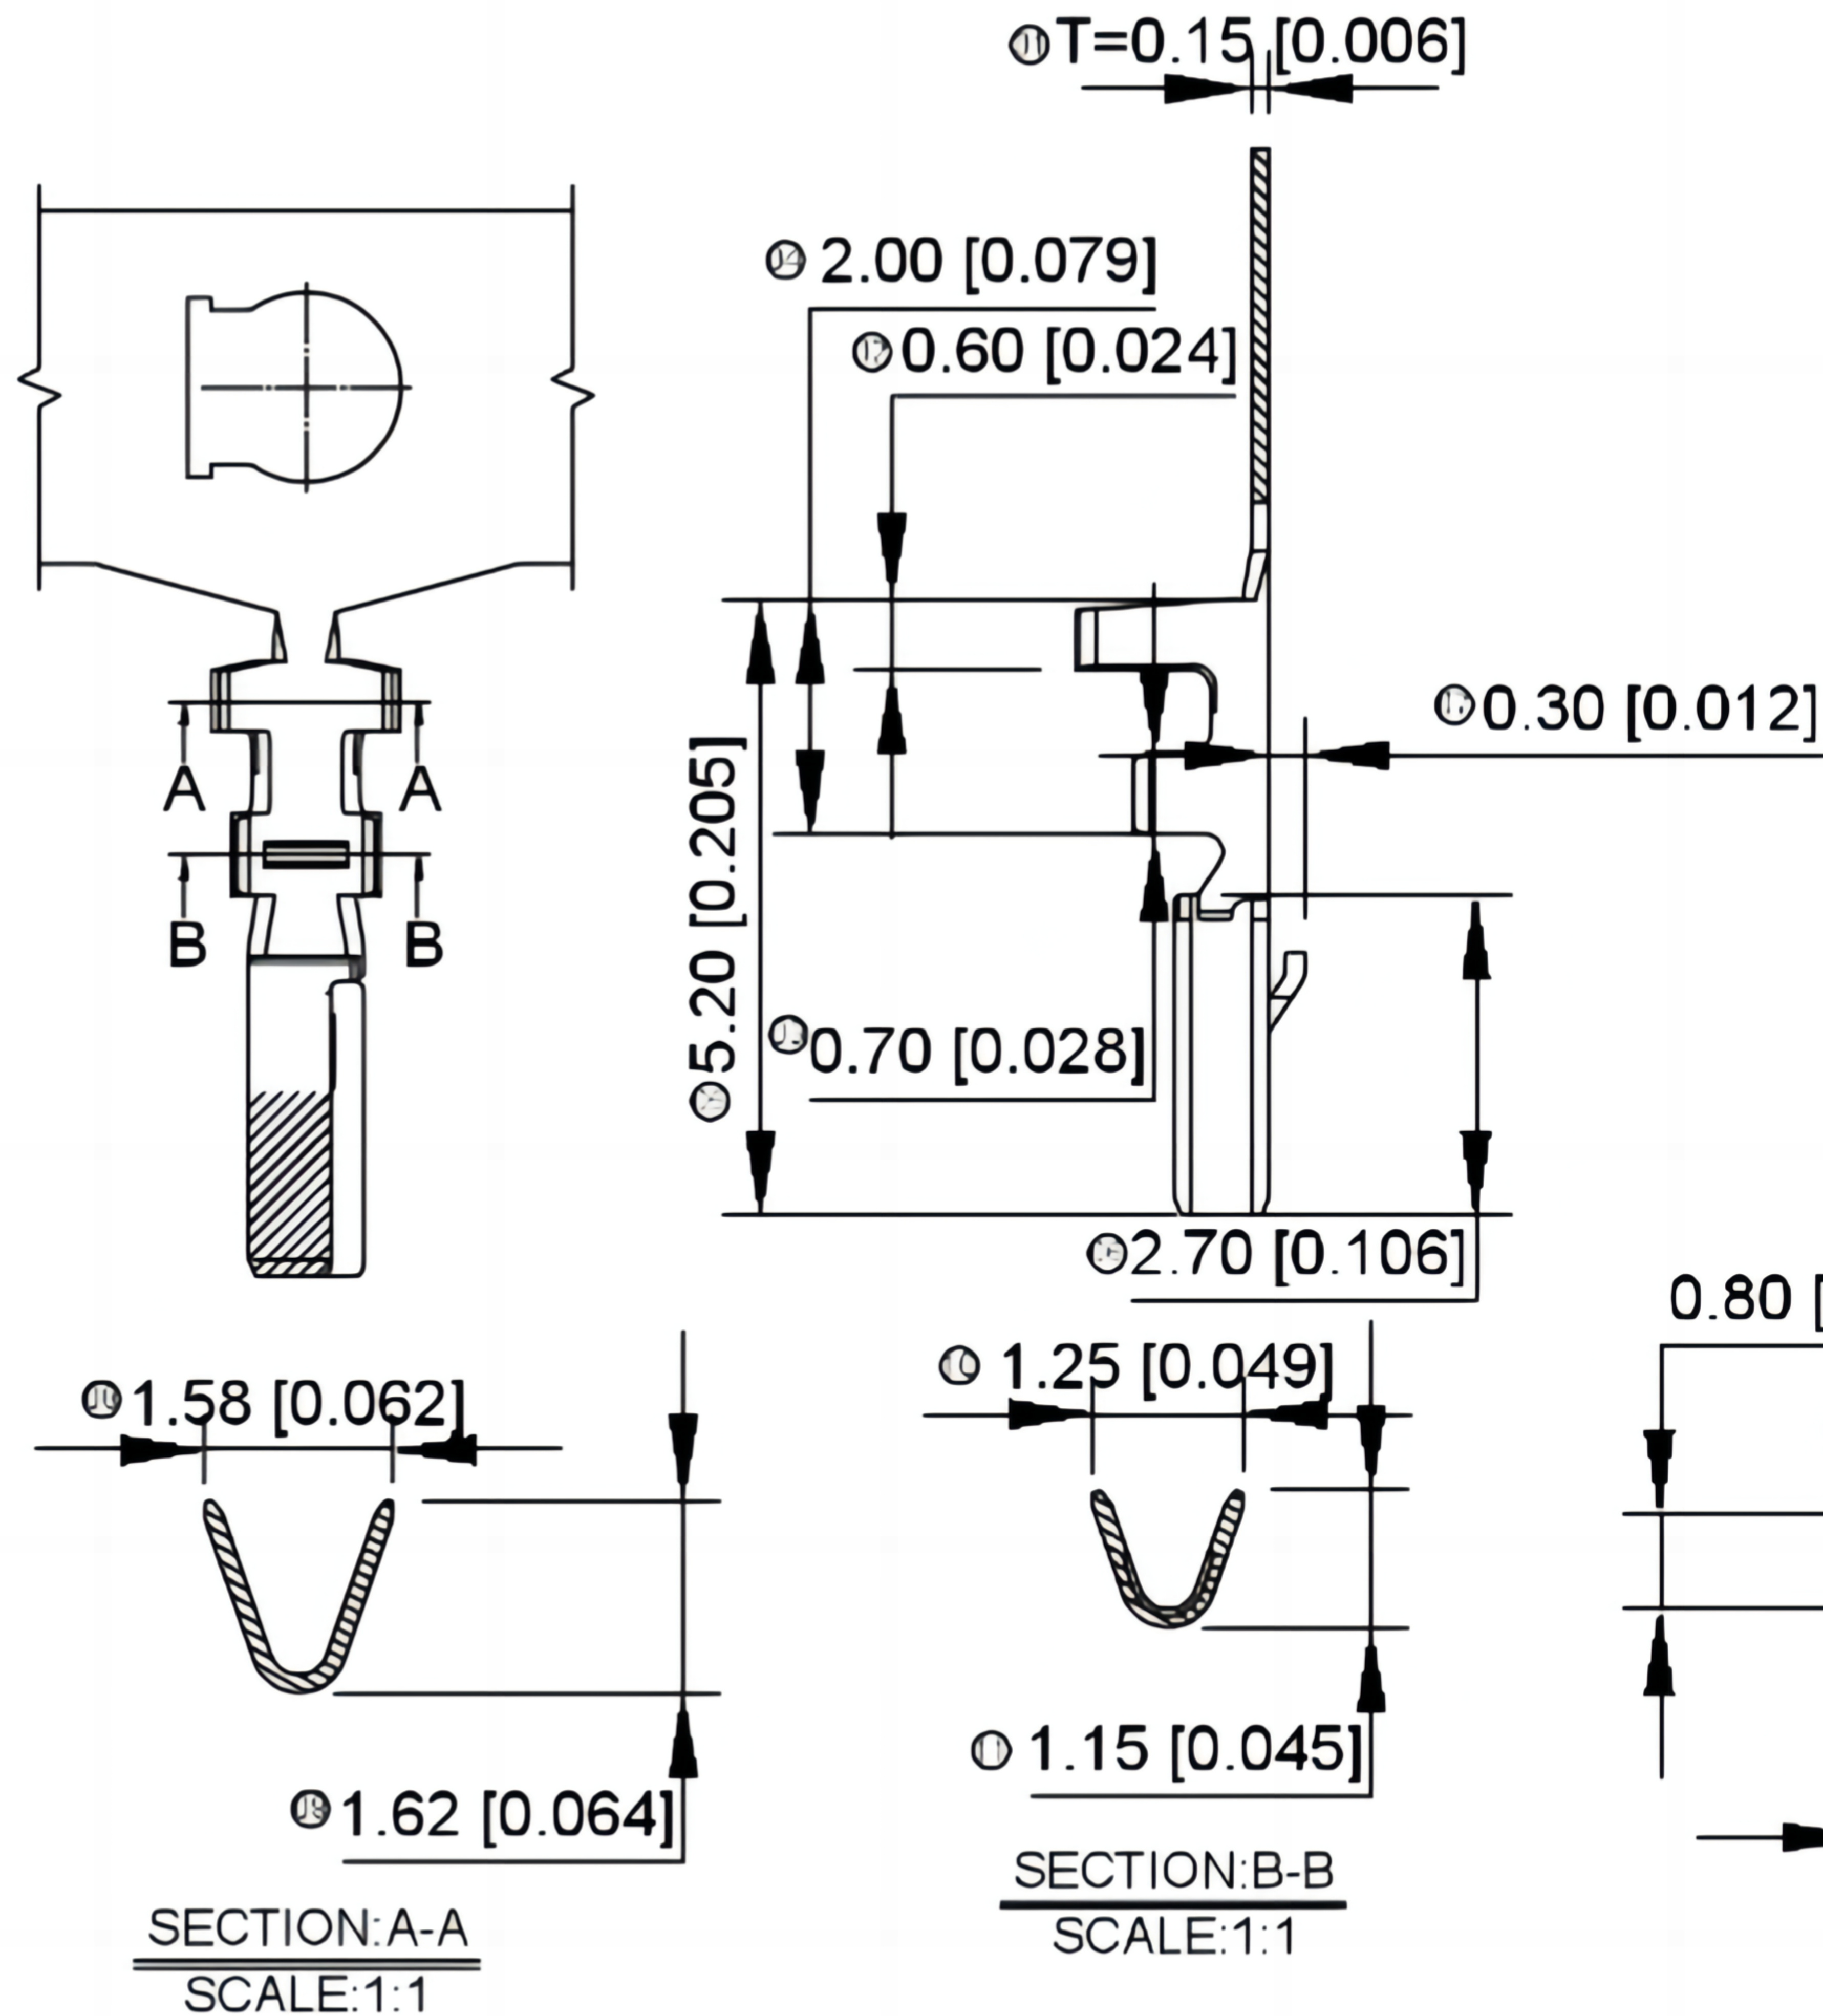

X3700T-PSN	Phosphor Bronze	AWG 25-28	0.7mm(Max)	Stamping Before Plating 30u" Min.	X3700H
PART NO	Material	Wire Range	Insulation O.D	Finish	Suitable Terminal

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: X3700T-PSN_1				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4 < L ≤ 16	±0.3		APPD		SIZE: A4					
				16 < L ≤ 63	±0.4									
				L > 63	±0.5									
					DATE	REVISED	APPROVED	REVISIONS			UNSPECIFIED TOLERANCES			
						www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD		
												WEIGHT	SHEET	REVISION
													1/1	A0