

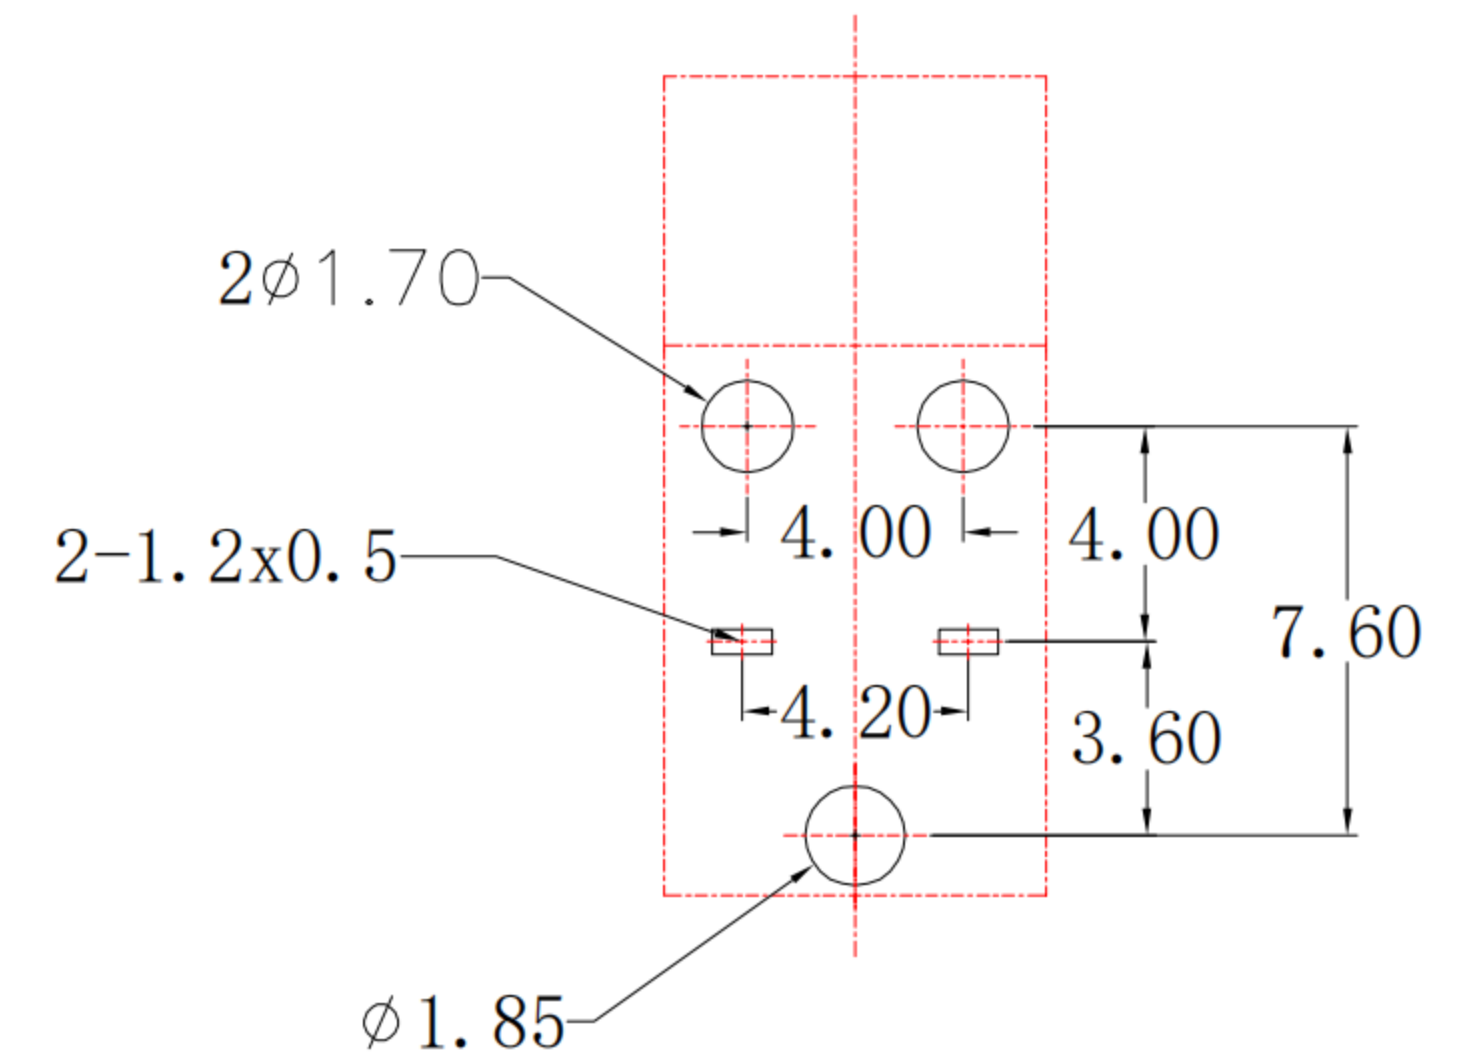
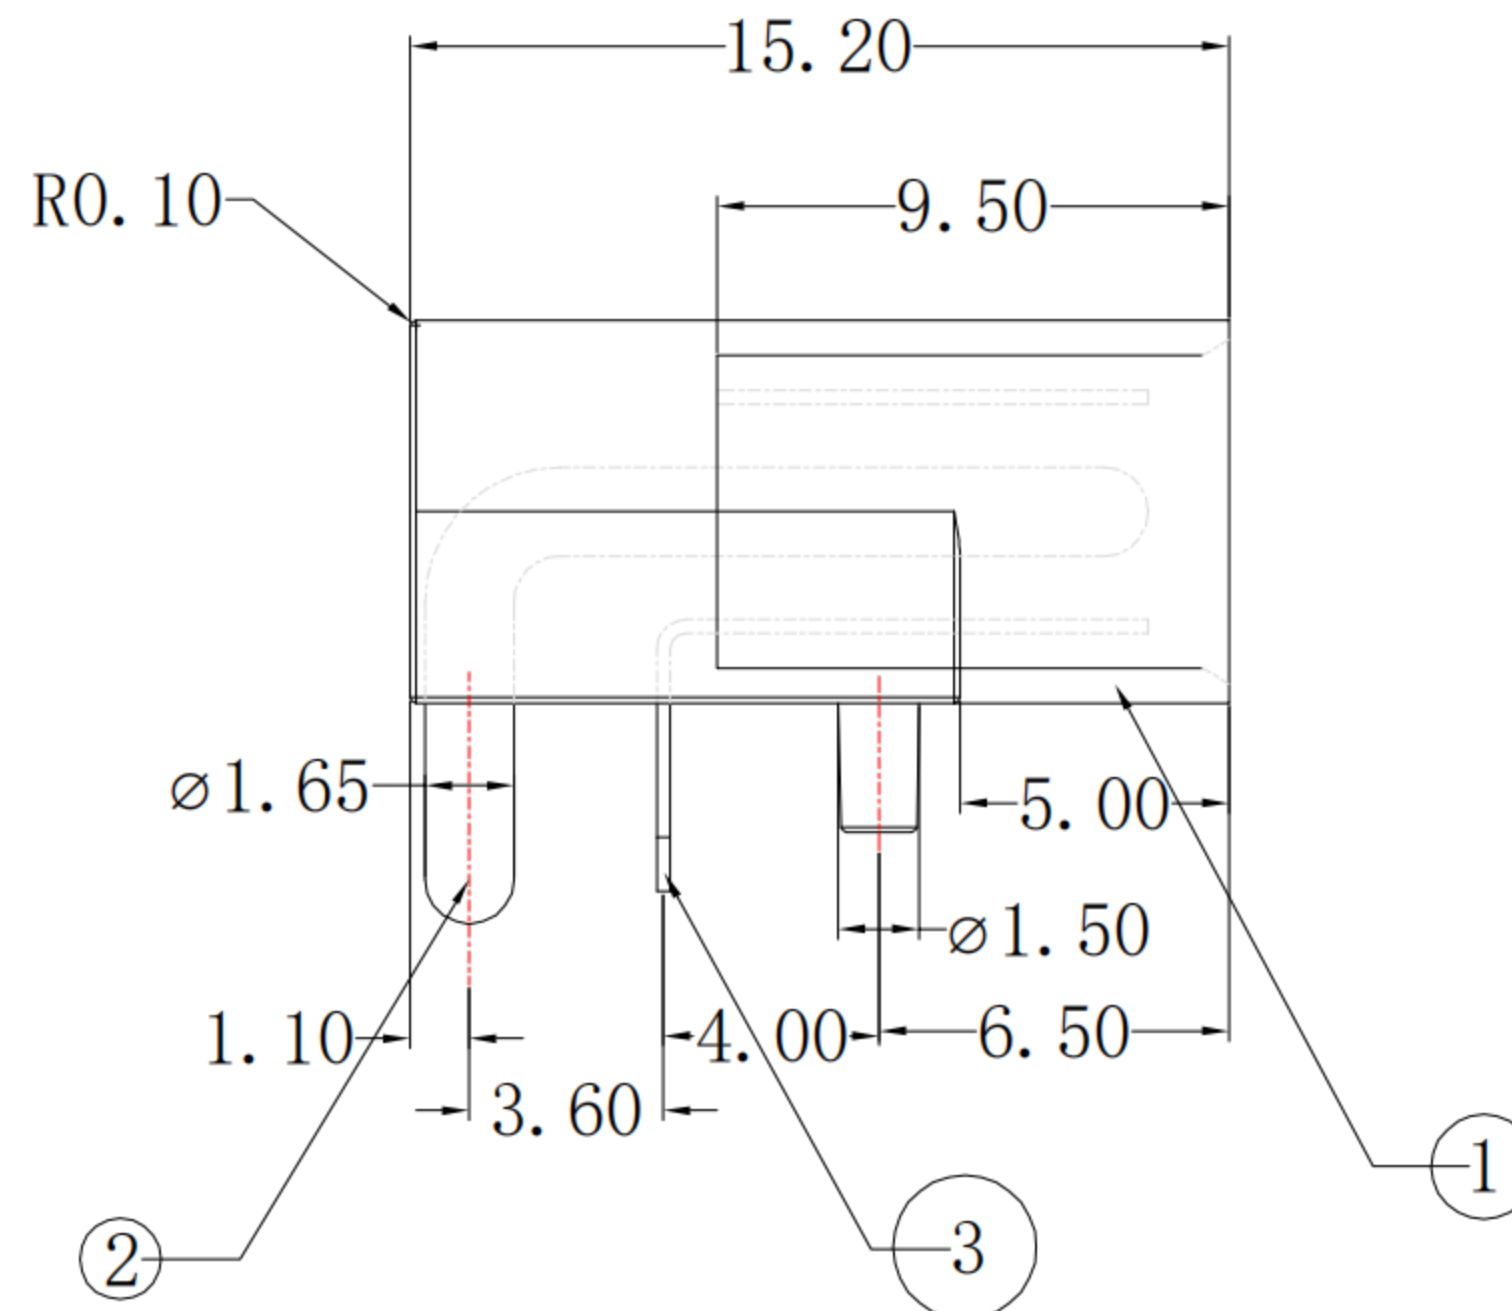
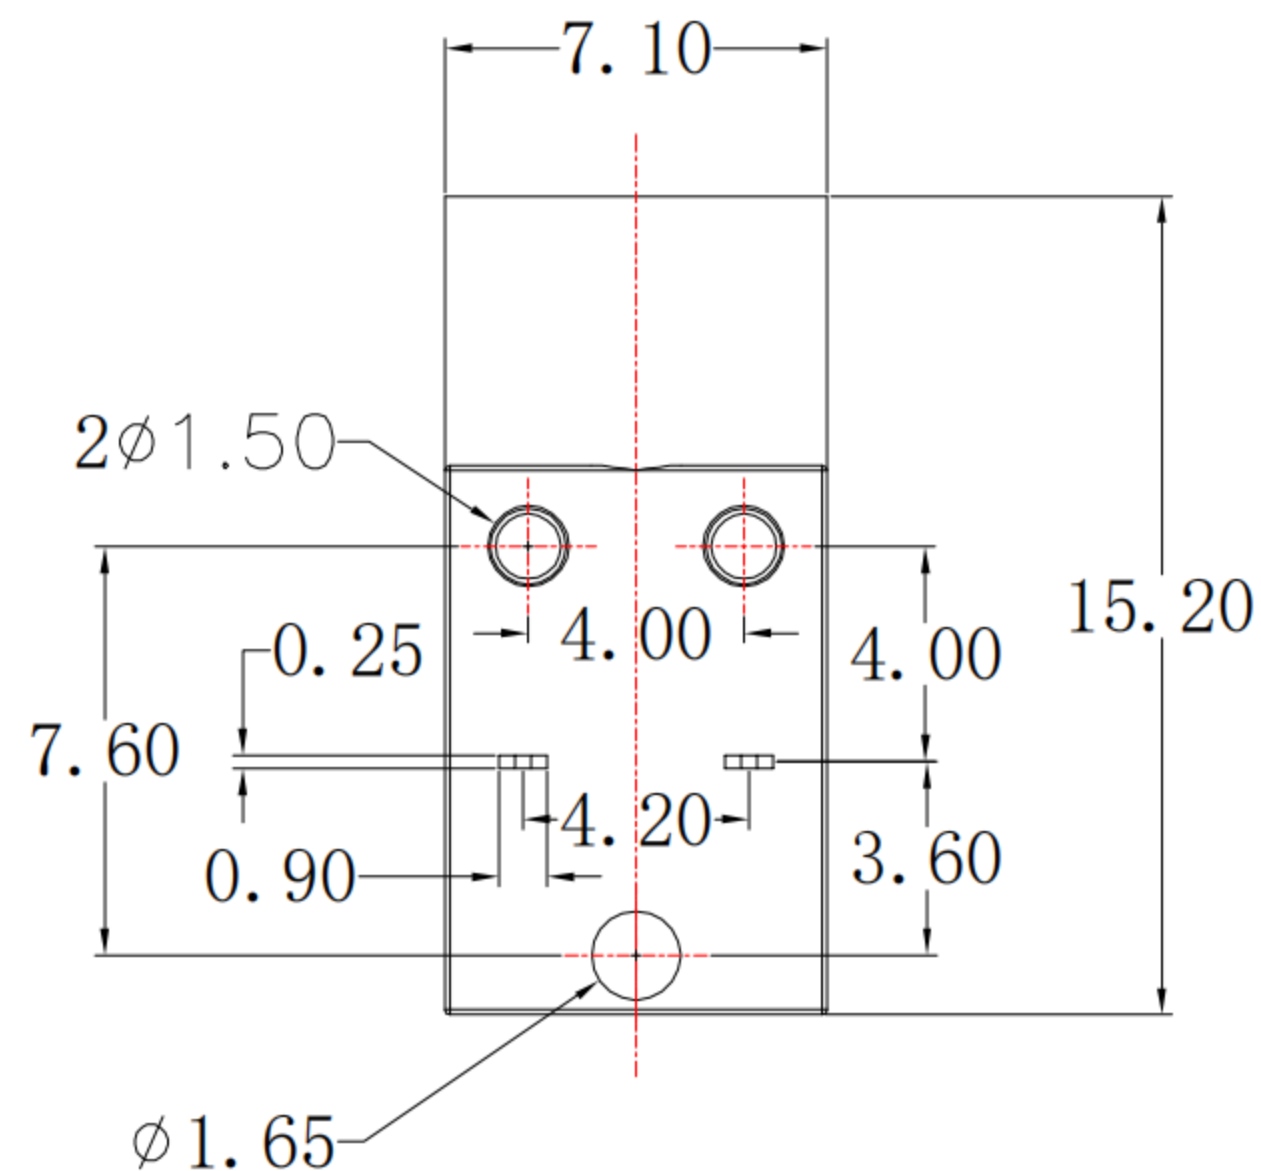
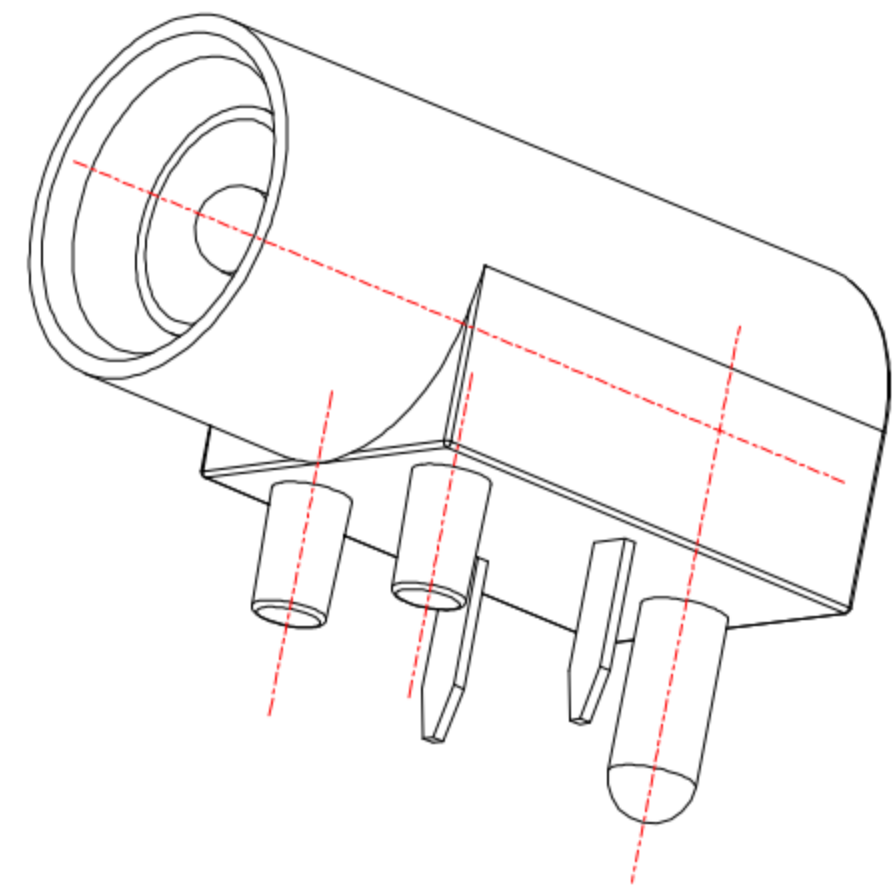


CAD FILE:

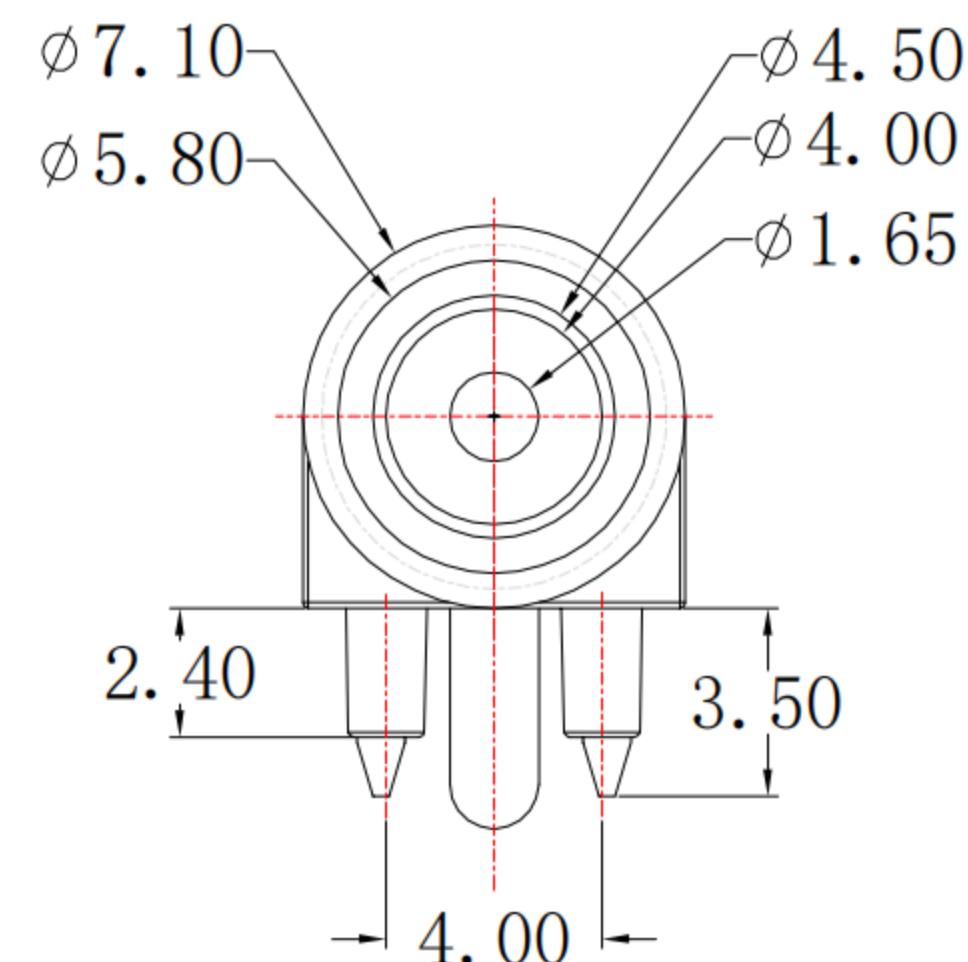


线路板开孔尺寸


PIN	φ1.65
APPD	

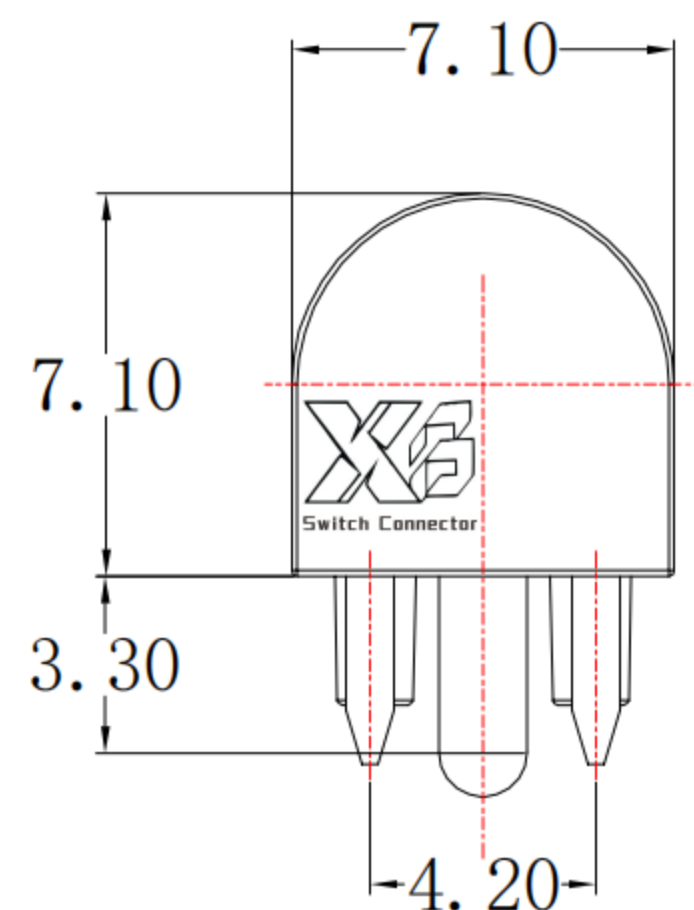

R0.10

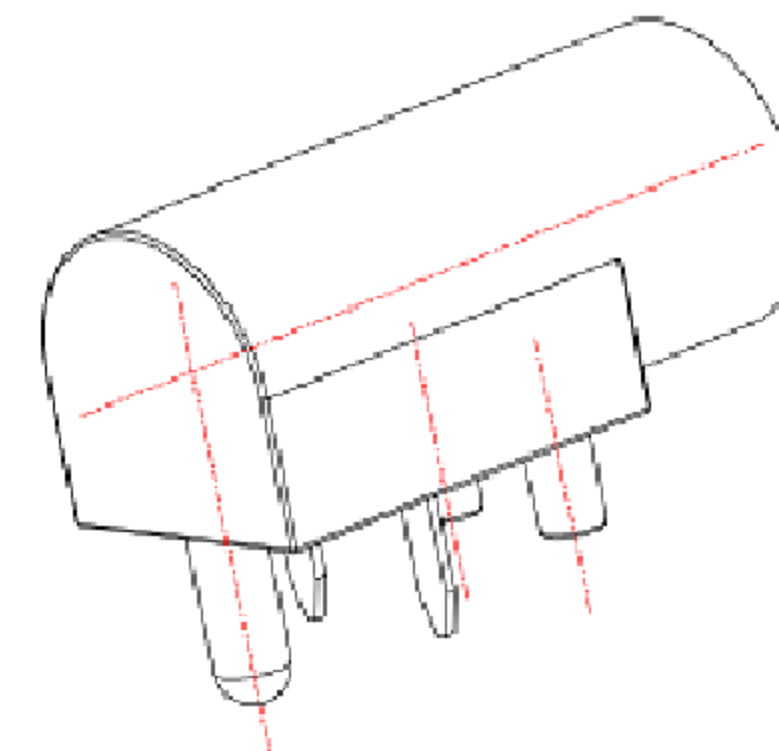

功能示意图

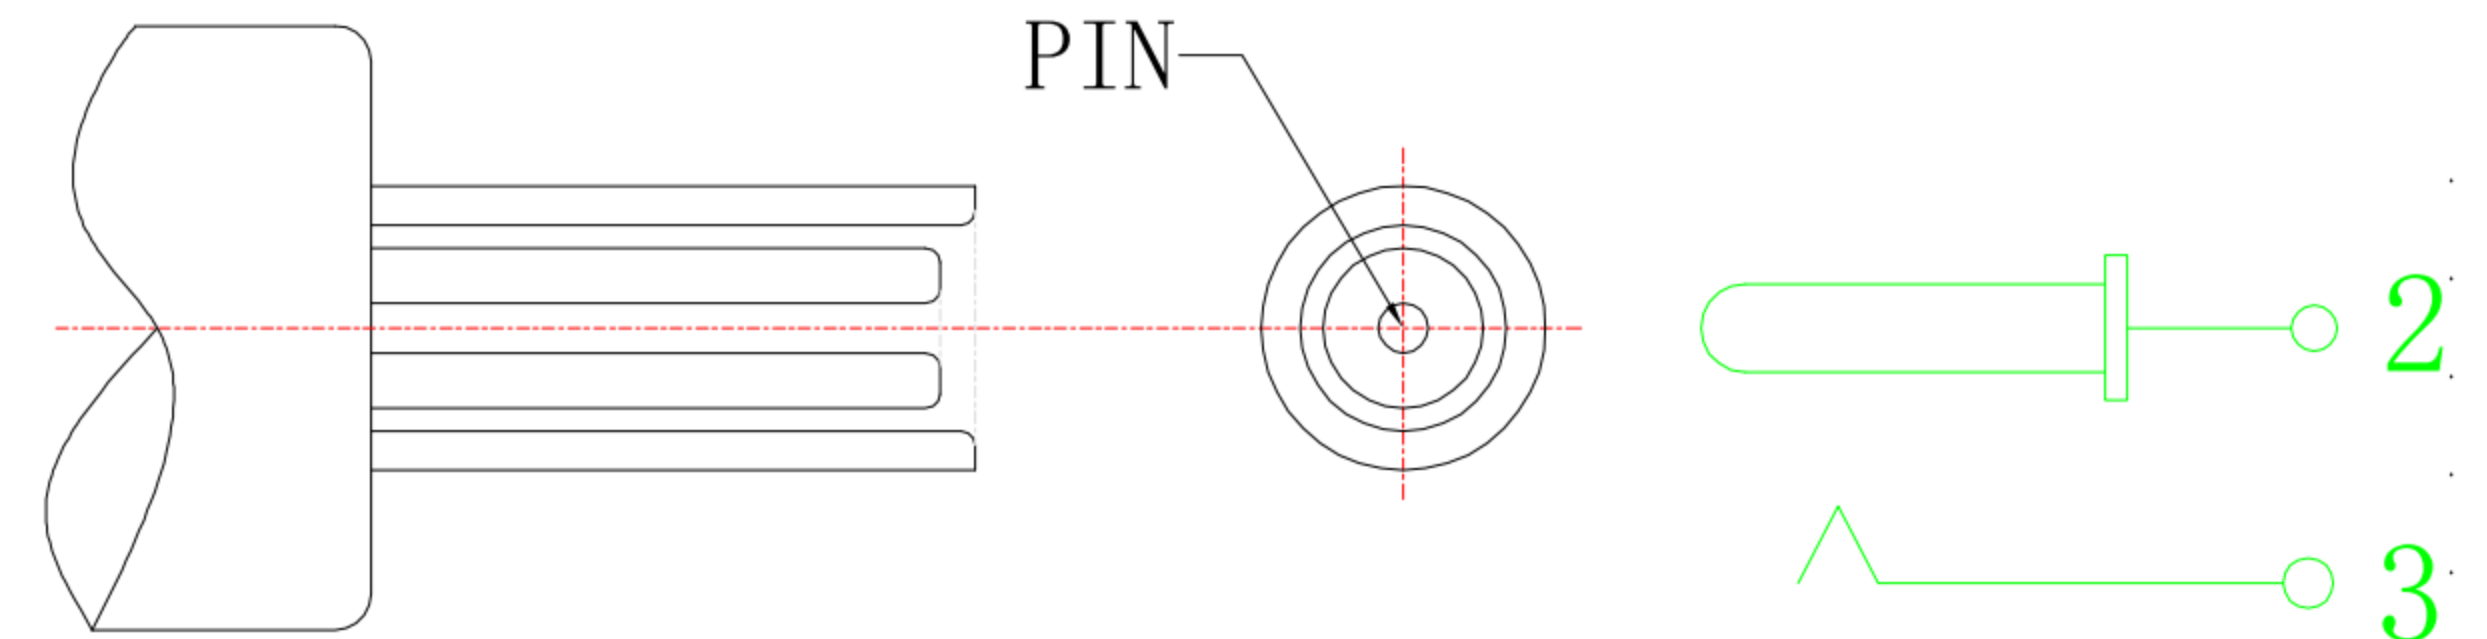

SPECIFICATION

- 1.Rating : DC 30V 2A;
- 2.Contact resistance: $\leq 30\text{m}\Omega$;
- 3.Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack			UNIT : mm	DRWG NO.:XB-DC-002E-D-1.65针
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					