

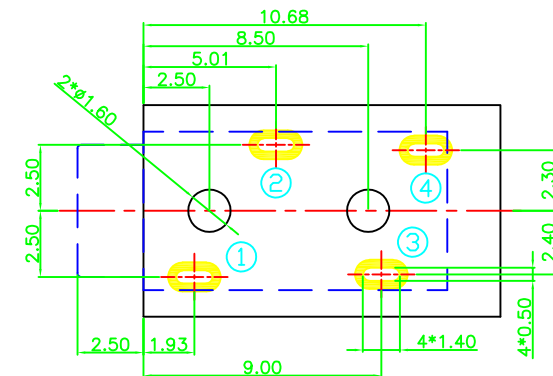
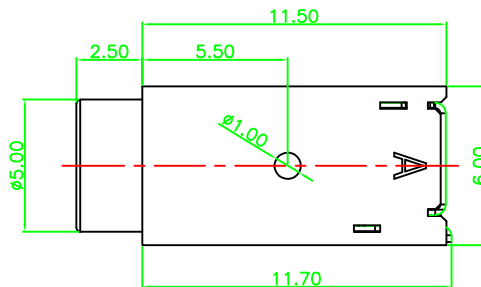
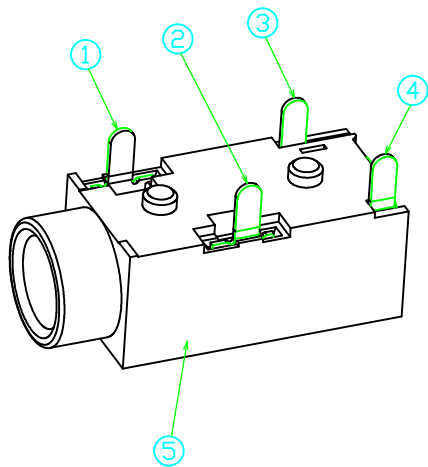



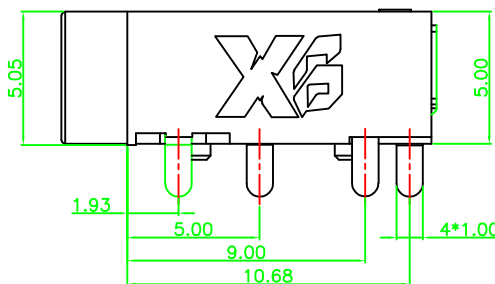

RECOMMENDED PCB LAYOUT




NOTES:


1. CONTACT CURRENT RATING: 12V DC,1A.
2. CONTACT RESISTANCE: 50mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.,500V DC/1min;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR INSERTION FORCES: 0.3kgf-3kgf;
7. CONNECTOR EXTRACTION FORCES: 0.3kgf-3kgf;
8. OPERATING TEMPERATURE RANGE: -20 to +80°C;

注意:

常态下③和④短路,
插入公头后为开路。

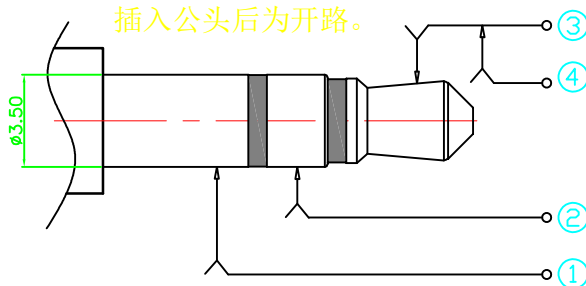

PULG SCHEMATIC

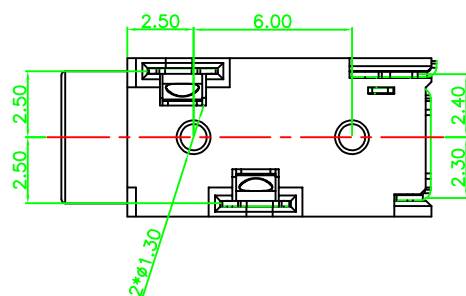







⑤	HOUSING	1	PA10T	Black
④	CONTACT D	1	C5191 0.20T	Plating bright tin
③	CONTACT C	1	C5191 0.20T	Plating bright tin
②	CONTACT B	1	C5191 0.20T	Plating bright tin
①	CONTACT A	1	C5191 0.20T	Plating bright tin
ITEM	PART NAME	Q'TY	MATERIAL	REMARK

UNLESS OTHERWISE
SPECIFIED TOLERANCES


XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Φ3.5 PHONE JACK
DIM	TOL	DIM	TOL		2021.11.23	
X.	±0.50	X.	±2°	CHECK:		PART NO.
X.X	±0.30	X.X	±1°			XB-PJ03504-0861-00000H
X.XX	±0.20	X.XX		APPROVED	Andy	SHEET: 1/1
X.XXX	±0.10	X.XXX			2021.11.23	REV.: A1
3RD ANGLE PROJECTION		UNIT: mm		DRAWING NO		

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

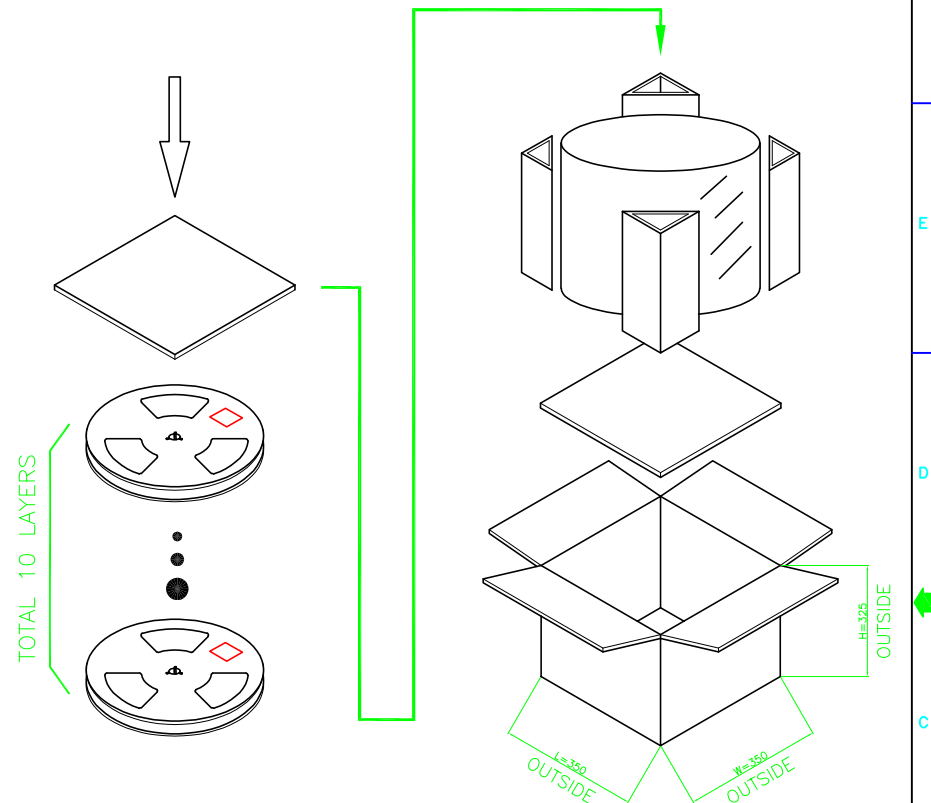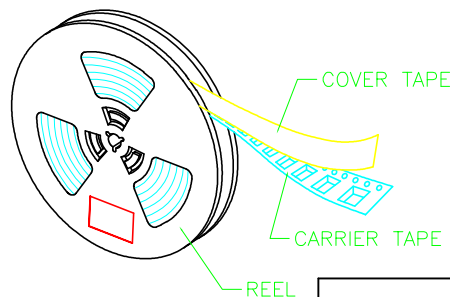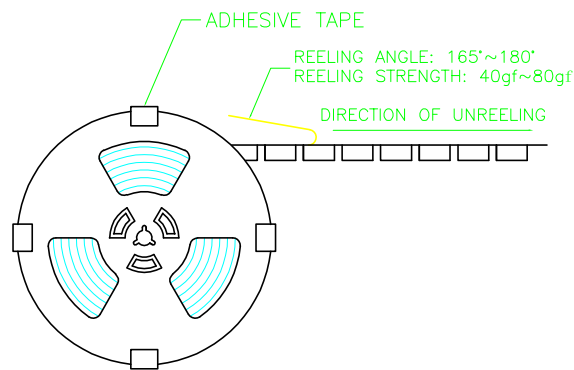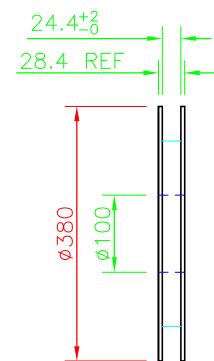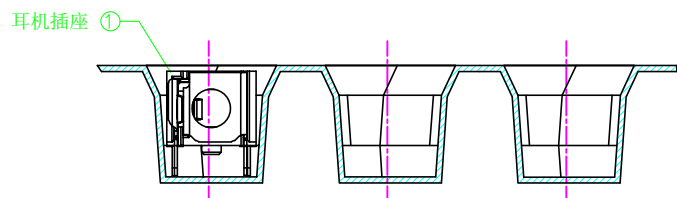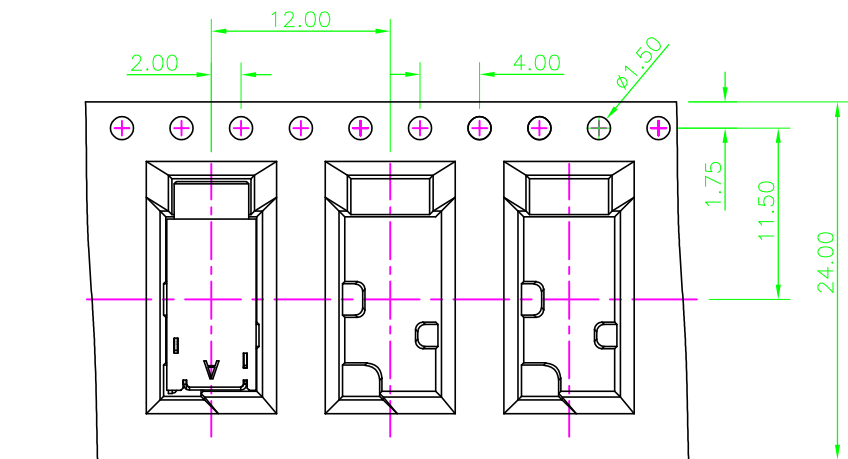

- NOTES:
1. PRIMARY PACKING: 1000 PCS/REEL;
 2. SECONDARY PACKING: 10 REELS/CARTON (10,000 PCS/CARTON);
 3. PRODUCT MEET THE REQUEST OF THE RoHS.

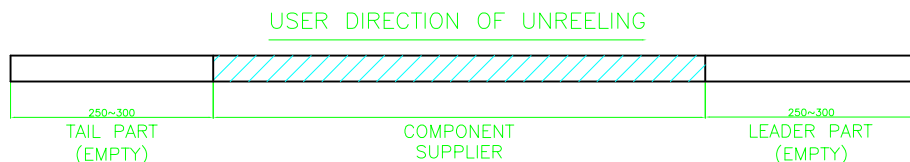

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

UNLESS OTHERWISE SPECIFIED TOLERANCES				XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2021.11.23	Φ3.5 PHONE JACK	
X.	±0.50	X.	±2°	CHECK:		- 包装图	
X.X	±0.30	X.X	±1°			PART NO.	
X.XX	±0.20	X.XX	—			XB-PJ03504-0861-00000H	
X.XXX	±0.10	X.XXX	—			SHEET: 1/1 REV.: A1	
3RD ANGLE PROJECTION				UNIT:	mm	APPROVED	Andy
					2021.11.23	DRAWING NO	