

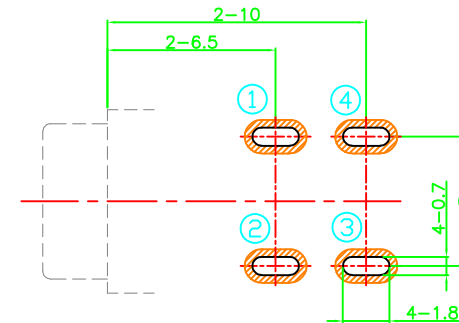
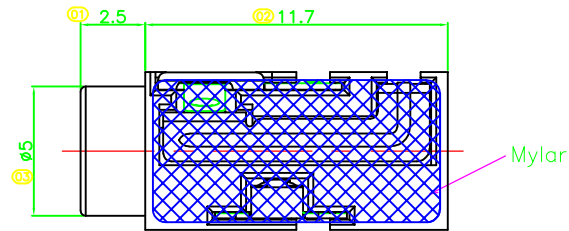
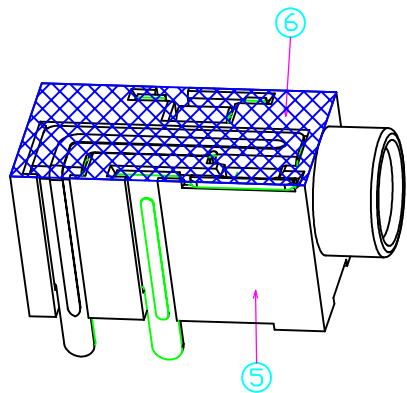


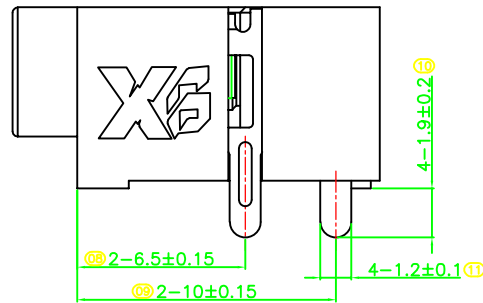


RECOMMENDED PCB LAYOUT

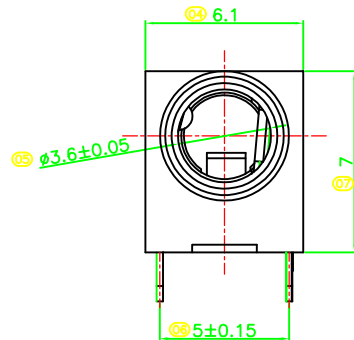


备注:

- 1.额定电流: DC 30V,1A
- 2.接触阻抗: 30mΩ MAX.
- 3.绝缘阻抗: 100MΩ MIN.
- 4.耐电压: 500V AC
- 5.使用寿命: 5000次
- 6.插入力: 4-25N
- 7.拔出力: 4-25N
- 8.回流焊温度: 260°C±5°C
- 9.标注"XX"为FAI量测尺寸

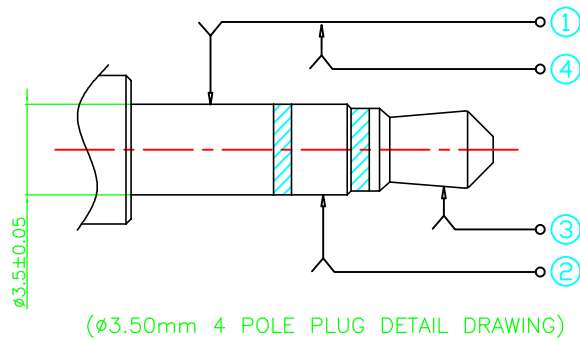

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

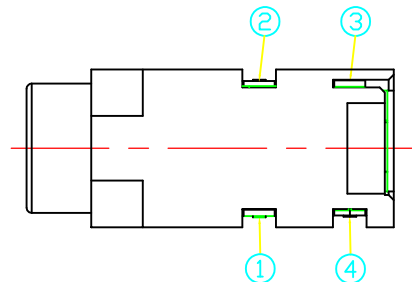

⑥	唛拉(Mylar)	1	Polyimide	
⑤	HOUSING	1	PA9T,Gray,UL94V-0	
④	CONTACT D	1	C5191-EH T=0.20mm	Tin plated
③	CONTACT C	1	C5191-EH T=0.25mm	Tin plated
②	CONTACT B	1	C5191-EH T=0.20mm	Tin plated
①	CONTACT A	1	C5191-EH T=0.25mm	Tin plated
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

3RD ANGLE PROJECTION
UNIT: mm

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony 2021.11.23	PART NAME:	Φ3.5 AUDIO JACK
CHECK:		PART NO.	XB-PJ03504-0956-00000H
APPROVED	Andy 2021.11.23	SHEET: 1/1	REV.: A1
		DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------