

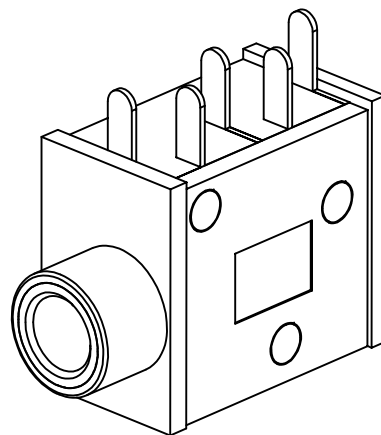
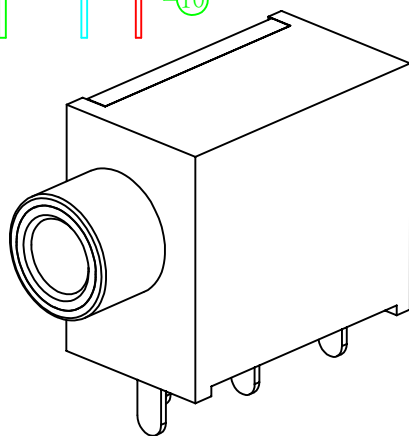
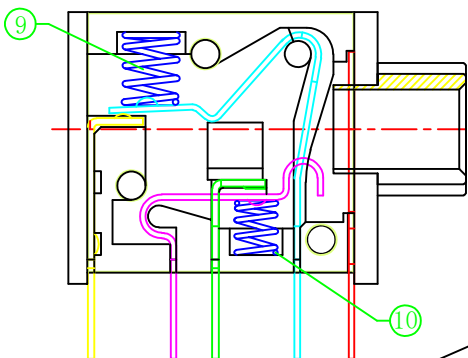
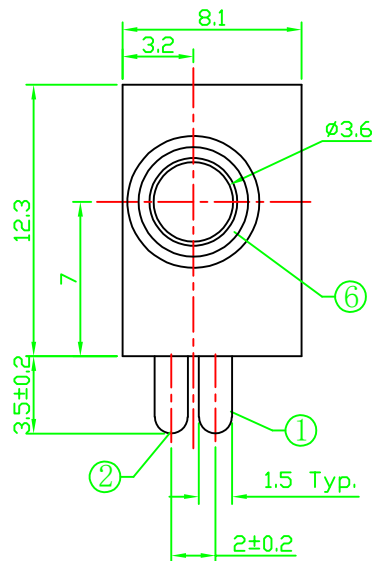


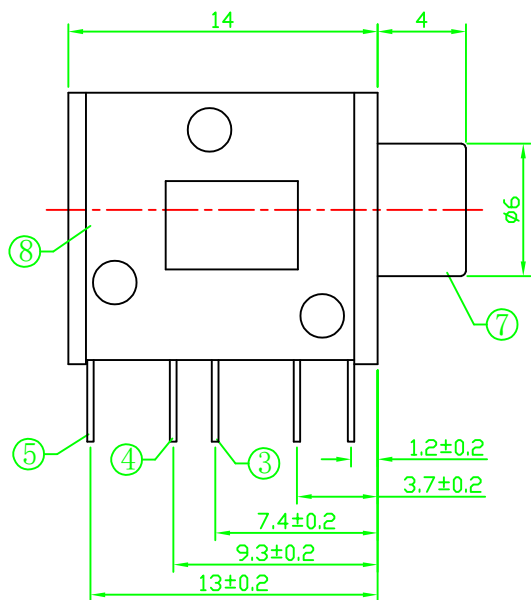

P. C. B LAYOUT TOP VIEW

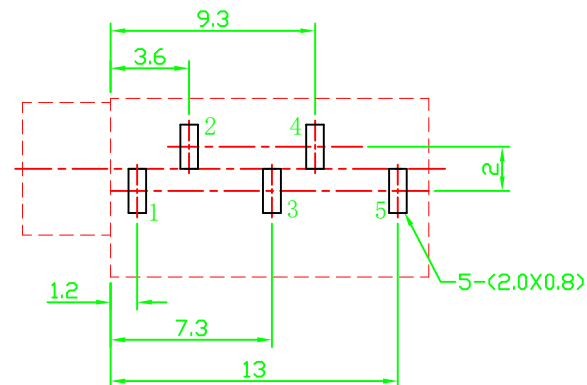


SPECIFICATION

1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 0.03 \Omega$;
 3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-20N;
 6. life test: 5,000 cycles.
- P/N. : 91PJ03505-1032-X0000H

COLOR:
1:BLACK
2:GREEN
3:PINK

SCHEMATIC




10	SPRING	1	SUS301	
9	SPRING	1	SUS301	
8	COVER	1	PBT	
7	HOUSING	1	PBT	
6	AXIS SUPPORT	1	BRASS	Ni-Plating
5	CURVE PIECE	1	BRASS	Sn-Plating
4	SPRING PIECE	1	BRONZE	Sn-Plating
3	CURVE PIECE	1	BRASS	Sn-Plating
2	SPRING PIECE	1	BRONZE	Sn-Plating
1	FLAT PIECE	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING


UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME: Ø3.5mm Audio Jack
DIM	TOL	DIM	TOL		2020.9.15	
X.	±0.50	X.	±2°	CHECK:		PART NO. XB-PJ03505-1032-X0000H
X.X	±0.30	X.X	±1°			
X.XX	±0.20	X.XX	////	APPROVED	Andy	SHEET: 1/1 REV.: A1
X.XXX	±0.10	X.XXX	////		2020.9.15	
		UNIT: mm		DRAWING NO		



REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------



单重:1.8g

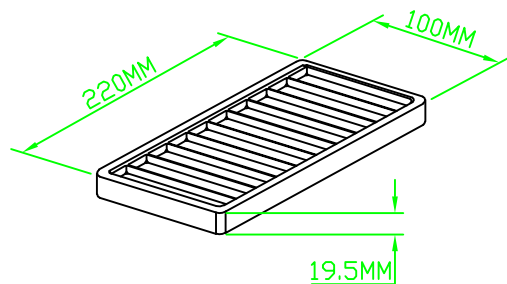


吸塑盒:10X10=100PCS/盘

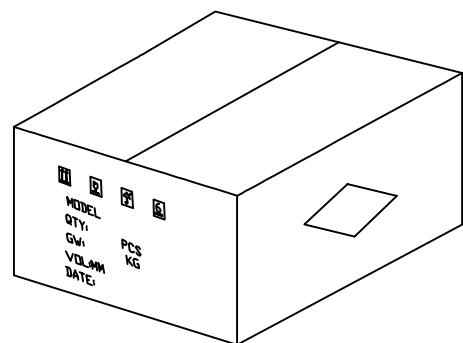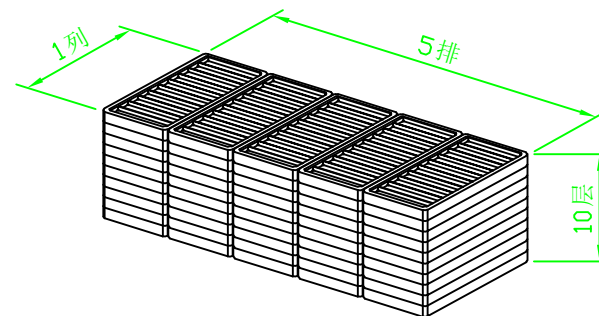

纸箱尺寸: 470*530*245

数量: 5K*2=10K PCS/箱

毛重: 22.0KG

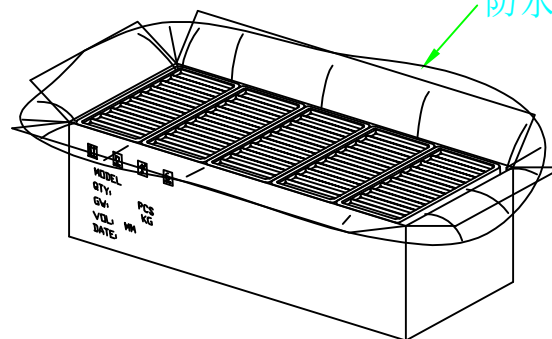

内箱尺寸: 230*520*240

数量: 1K*5=5K PCS/箱

毛重: 11.0KG

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS: ANGLES:

DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

3RD ANGLE PROJECTION

DESIGN: Tony
2020.9.15

CHECK:

APPROVED Andy
2020.9.15

PART NAME:
Ø3.5mm Audio Jack
— 包装图

PART NO.
XB-PJ03505-1032-X0000H
SHEET: 1/1 REV.: A1
DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------