
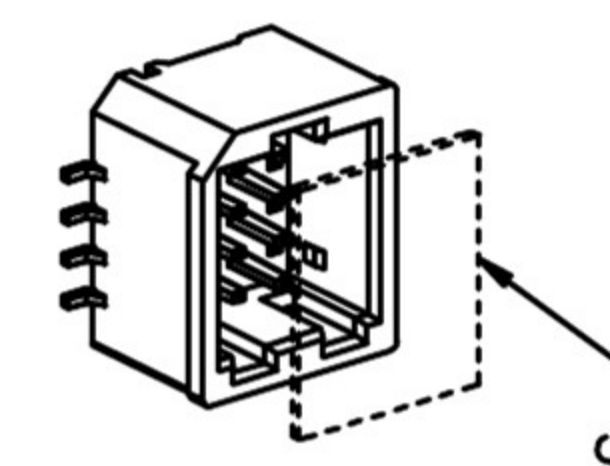
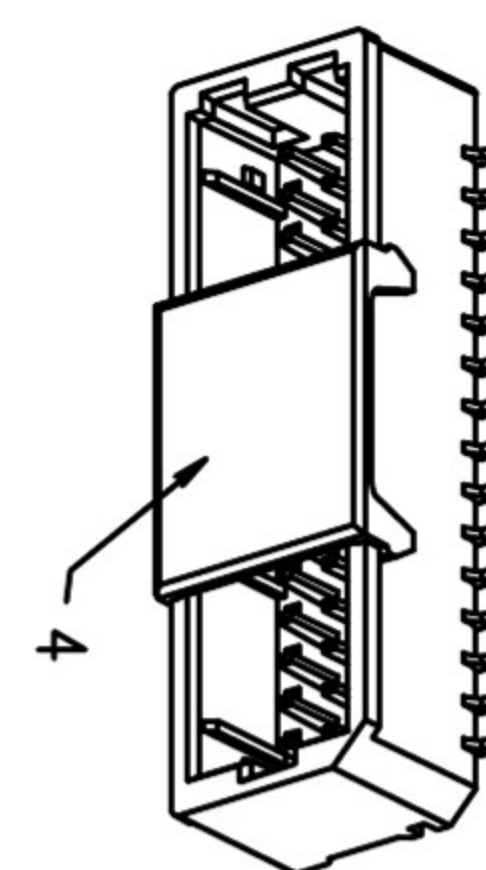
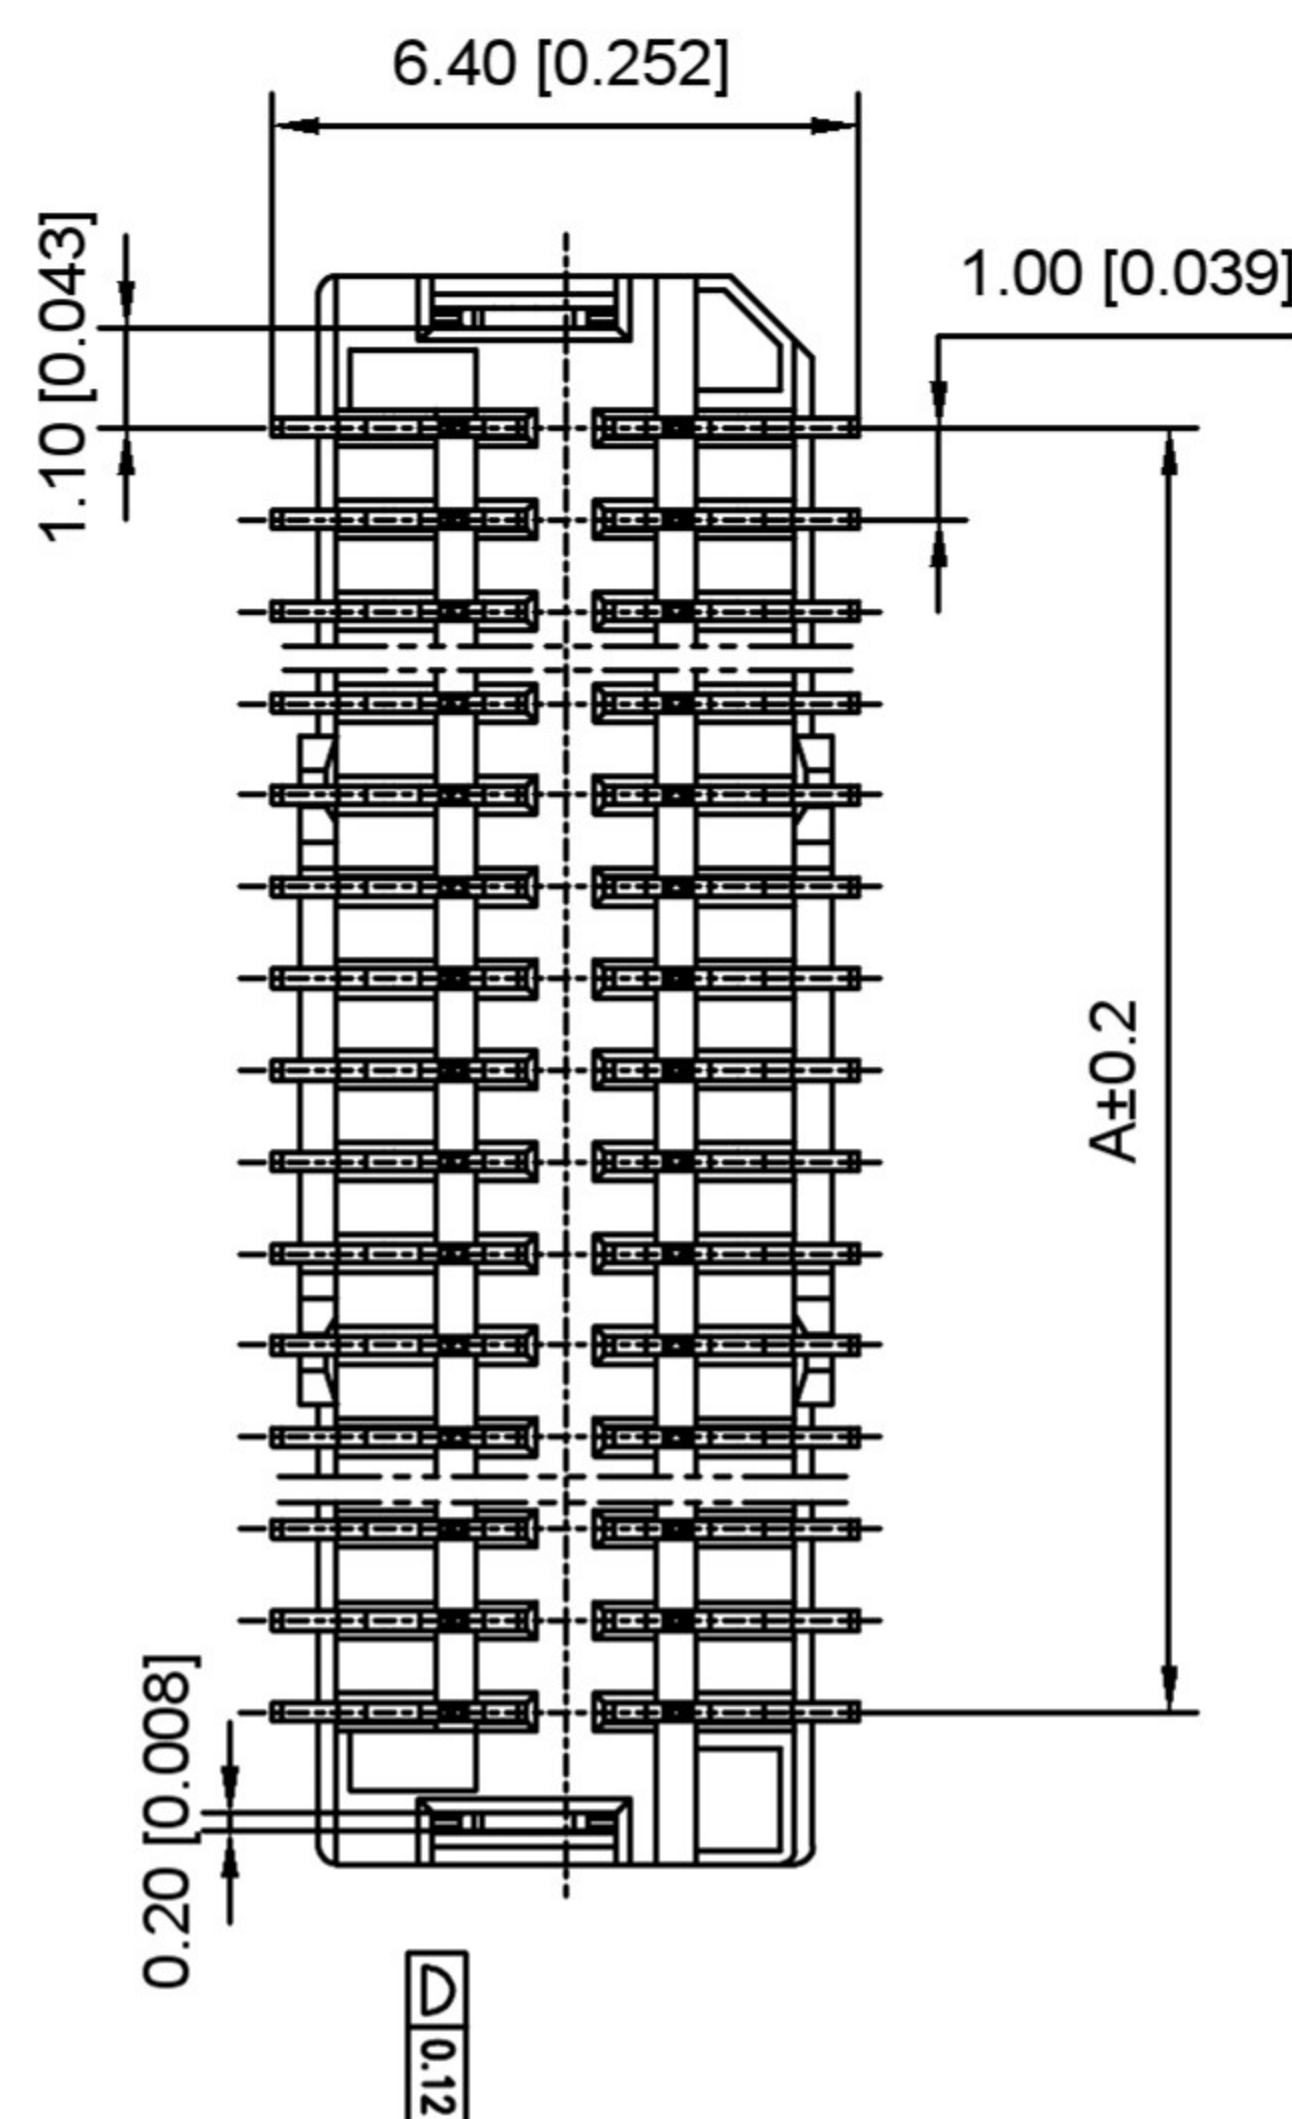


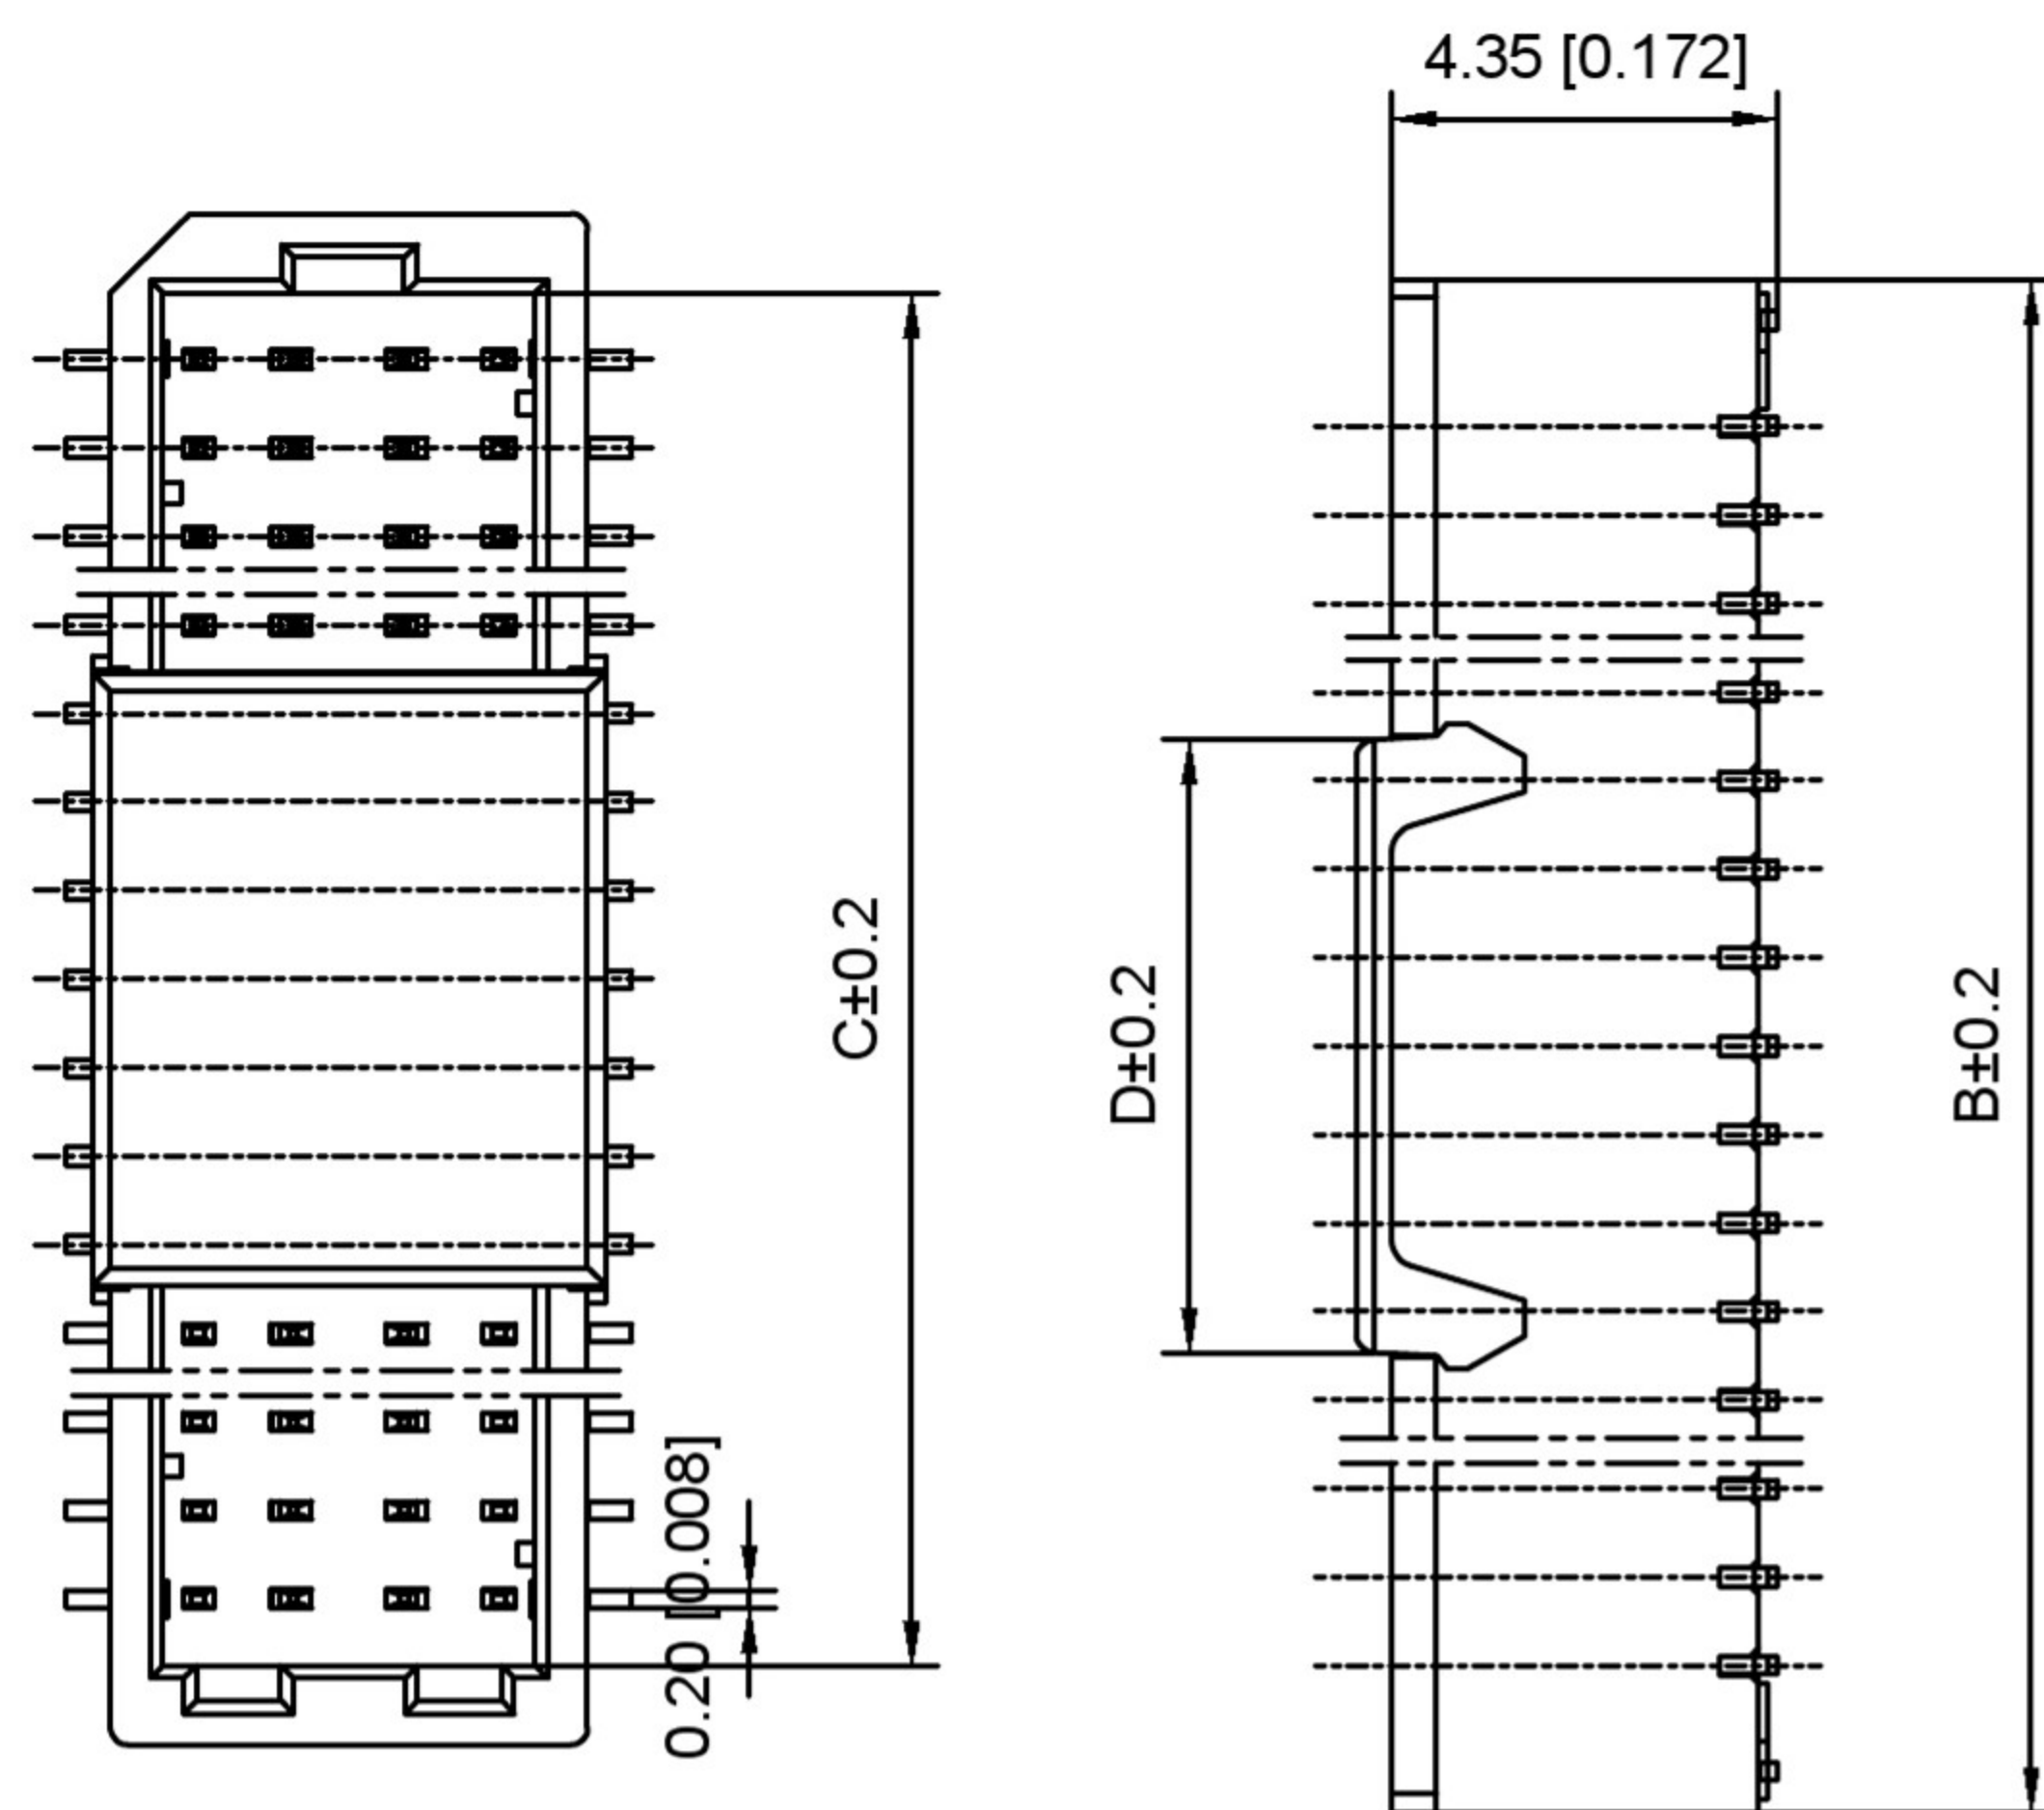


Specifications :


- Voltage rating: 50 V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 100M\Omega$
- Contact resistance: $\leq 20m\Omega$

X1011 W V S-2*XX- 9T XX
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category : W-WAFER
- ③ Wedding Board Angle : V-Stright 180°
- ④ Welding Way:S-SMT
- ⑤ Row No.Pin No.2*02-2*25
- ⑥ Material:9T-PA9T 94V-0
- ⑦ Planting Category:SN-Bright tin plating
V01-All Gold Flash

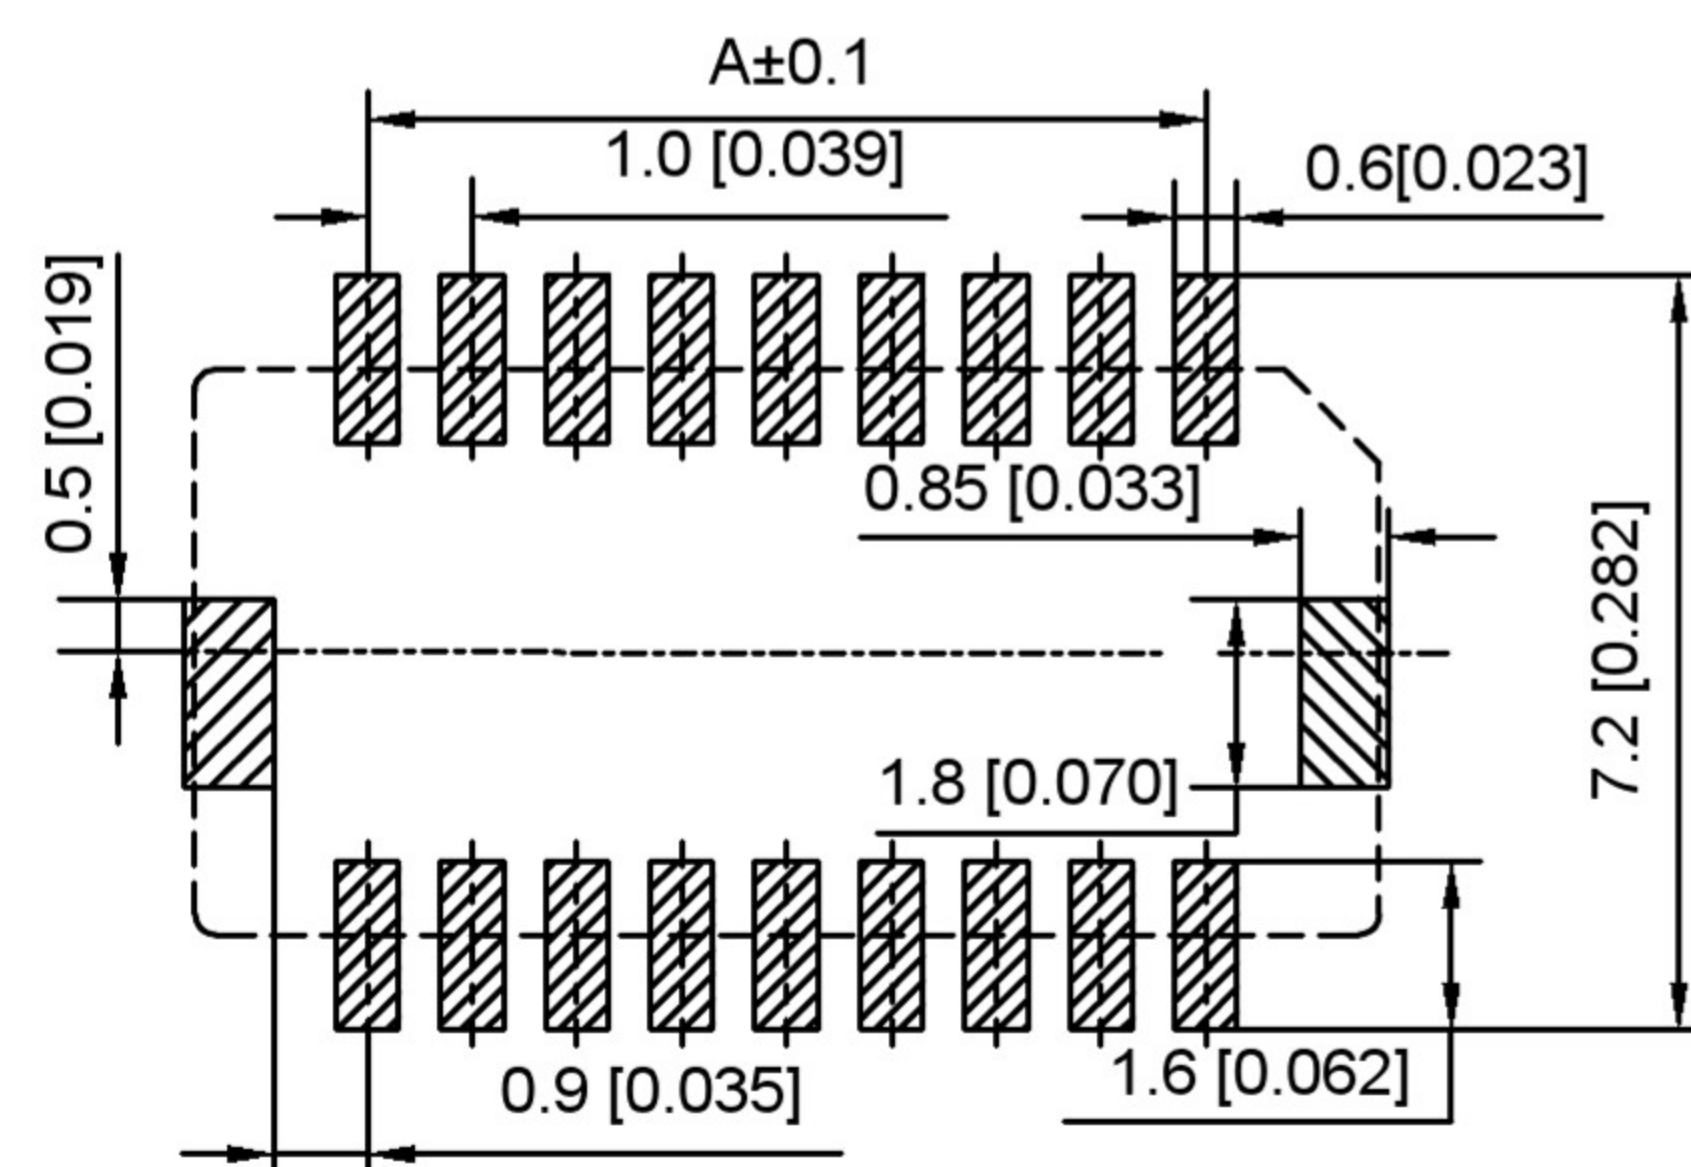






PCB LAYOUT

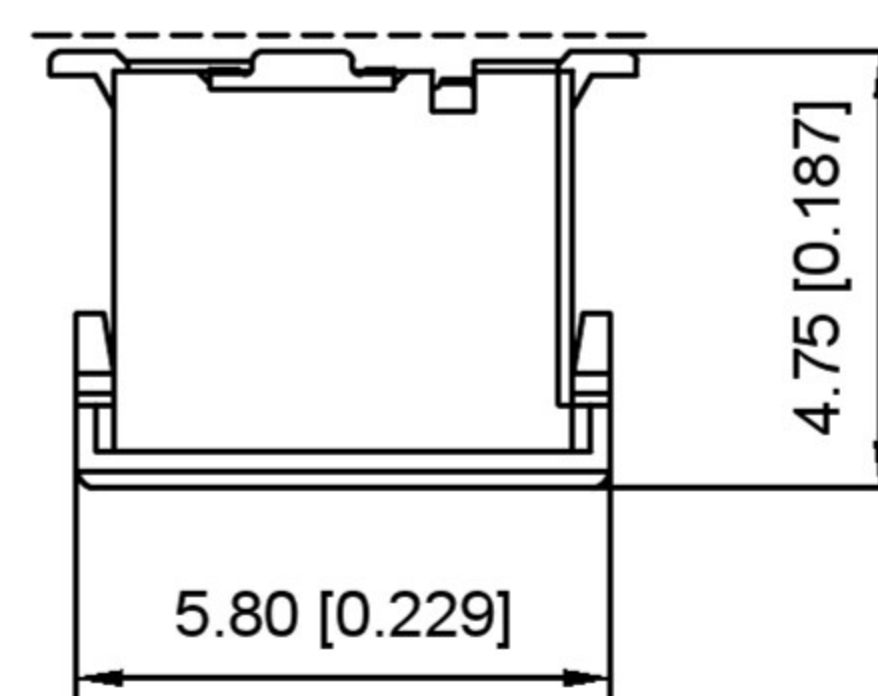

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
2*02	1.00	4.30	2.5	2*14	13.0	16.30	14.5
2*03	2.00	5.30	3.5	2*15	14.0	17.30	15.5
2*04	3.00	6.30	4.5	2*16	15.0	18.30	16.5
2*05	4.00	7.30	5.5	2*18	17.0	20.30	18.5
2*06	5.00	8.30	6.5	2*20	19.0	22.30	20.5
2*08	7.00	10.30	8.5	2*25	24.0	27.30	25.5
2*10	9.00	12.30	10.5				
2*11	10.00	13.30	11.5				
2*12	11.00	14.30	12.5				

X1011WVS-2*XX-9TV01	PA9T UL 94V-0	Phosphor Bronze	Gold-Flash	X1011H
X1011WVS-2*XX-9TSN	PA9T UL 94V-0	Phosphor Bronze	TIN-Plated	
PART NO	Material	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Suitable Terminal

							DSND		SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0

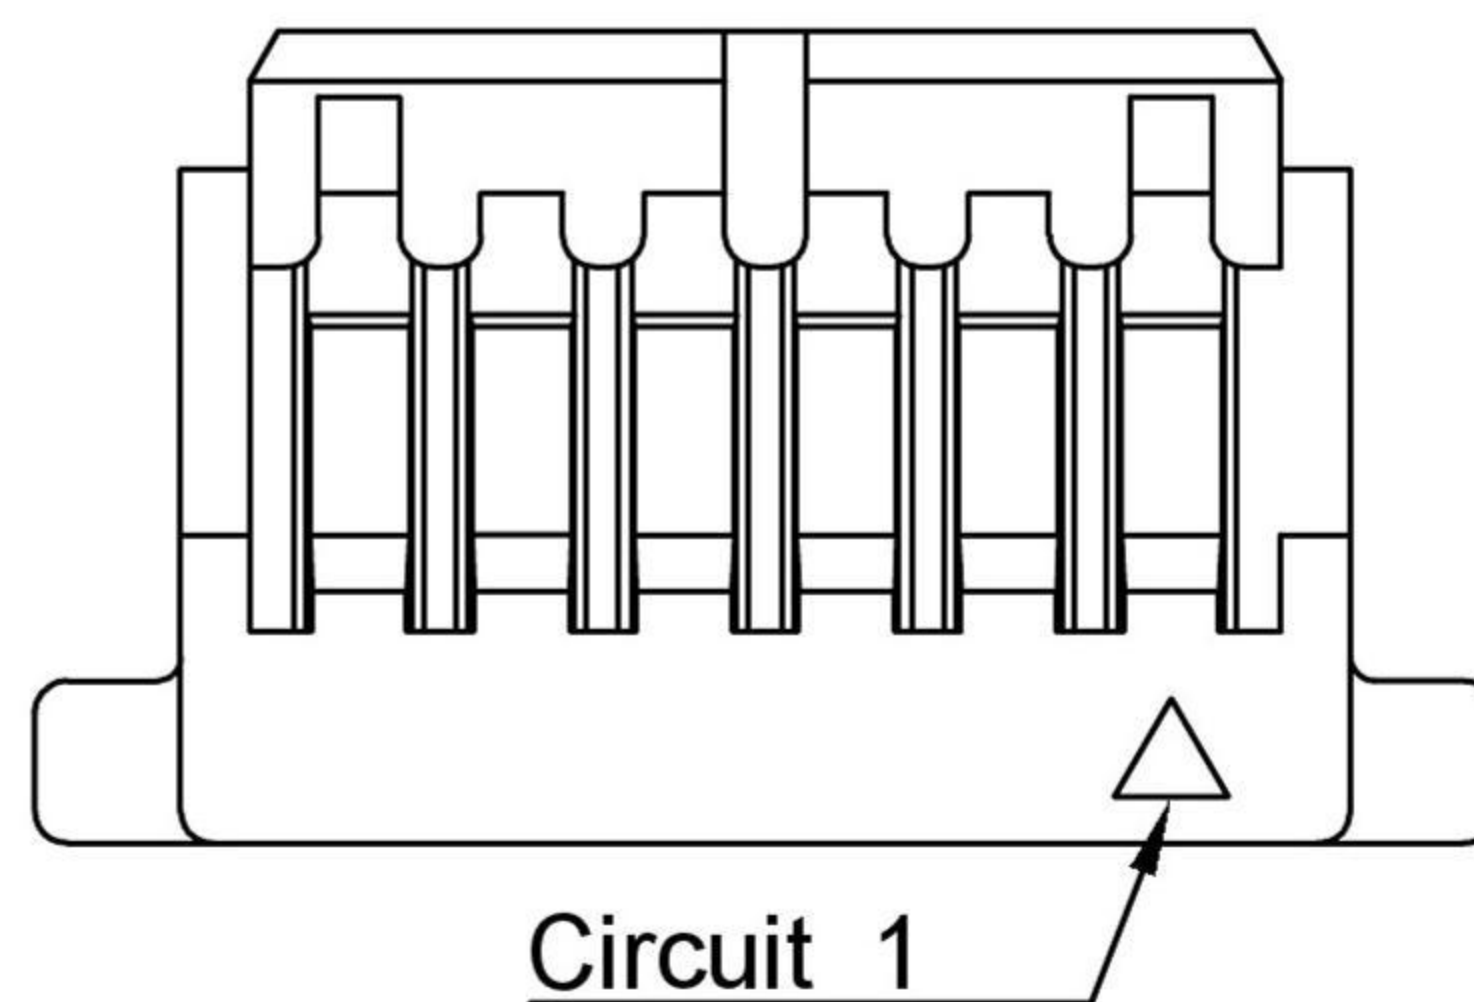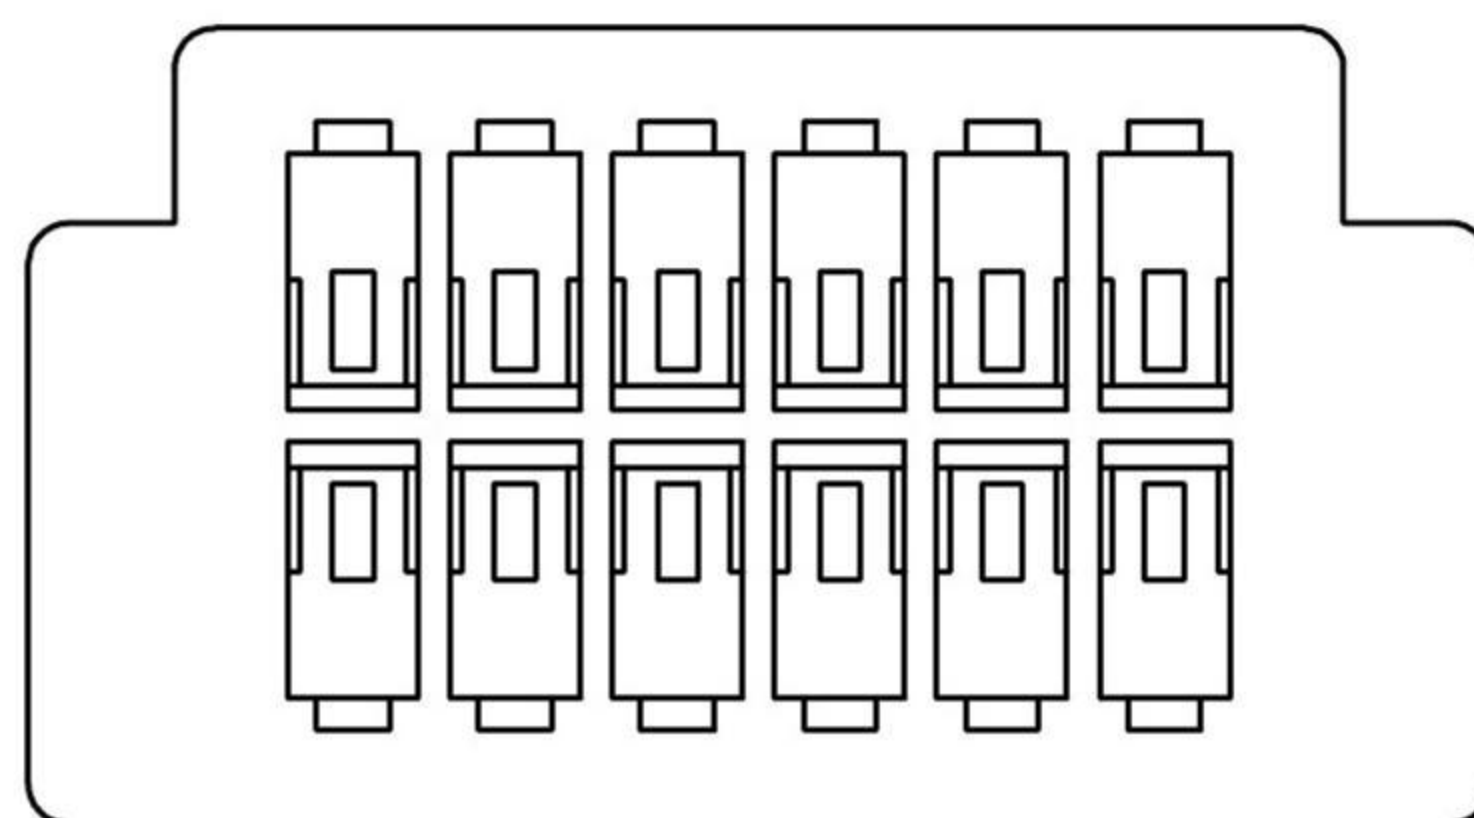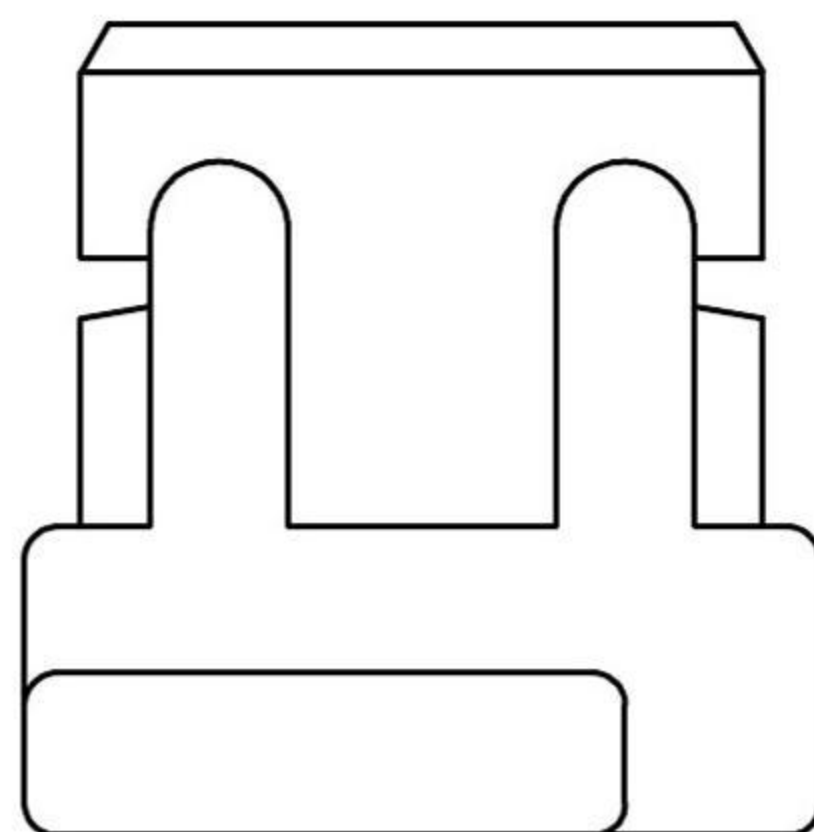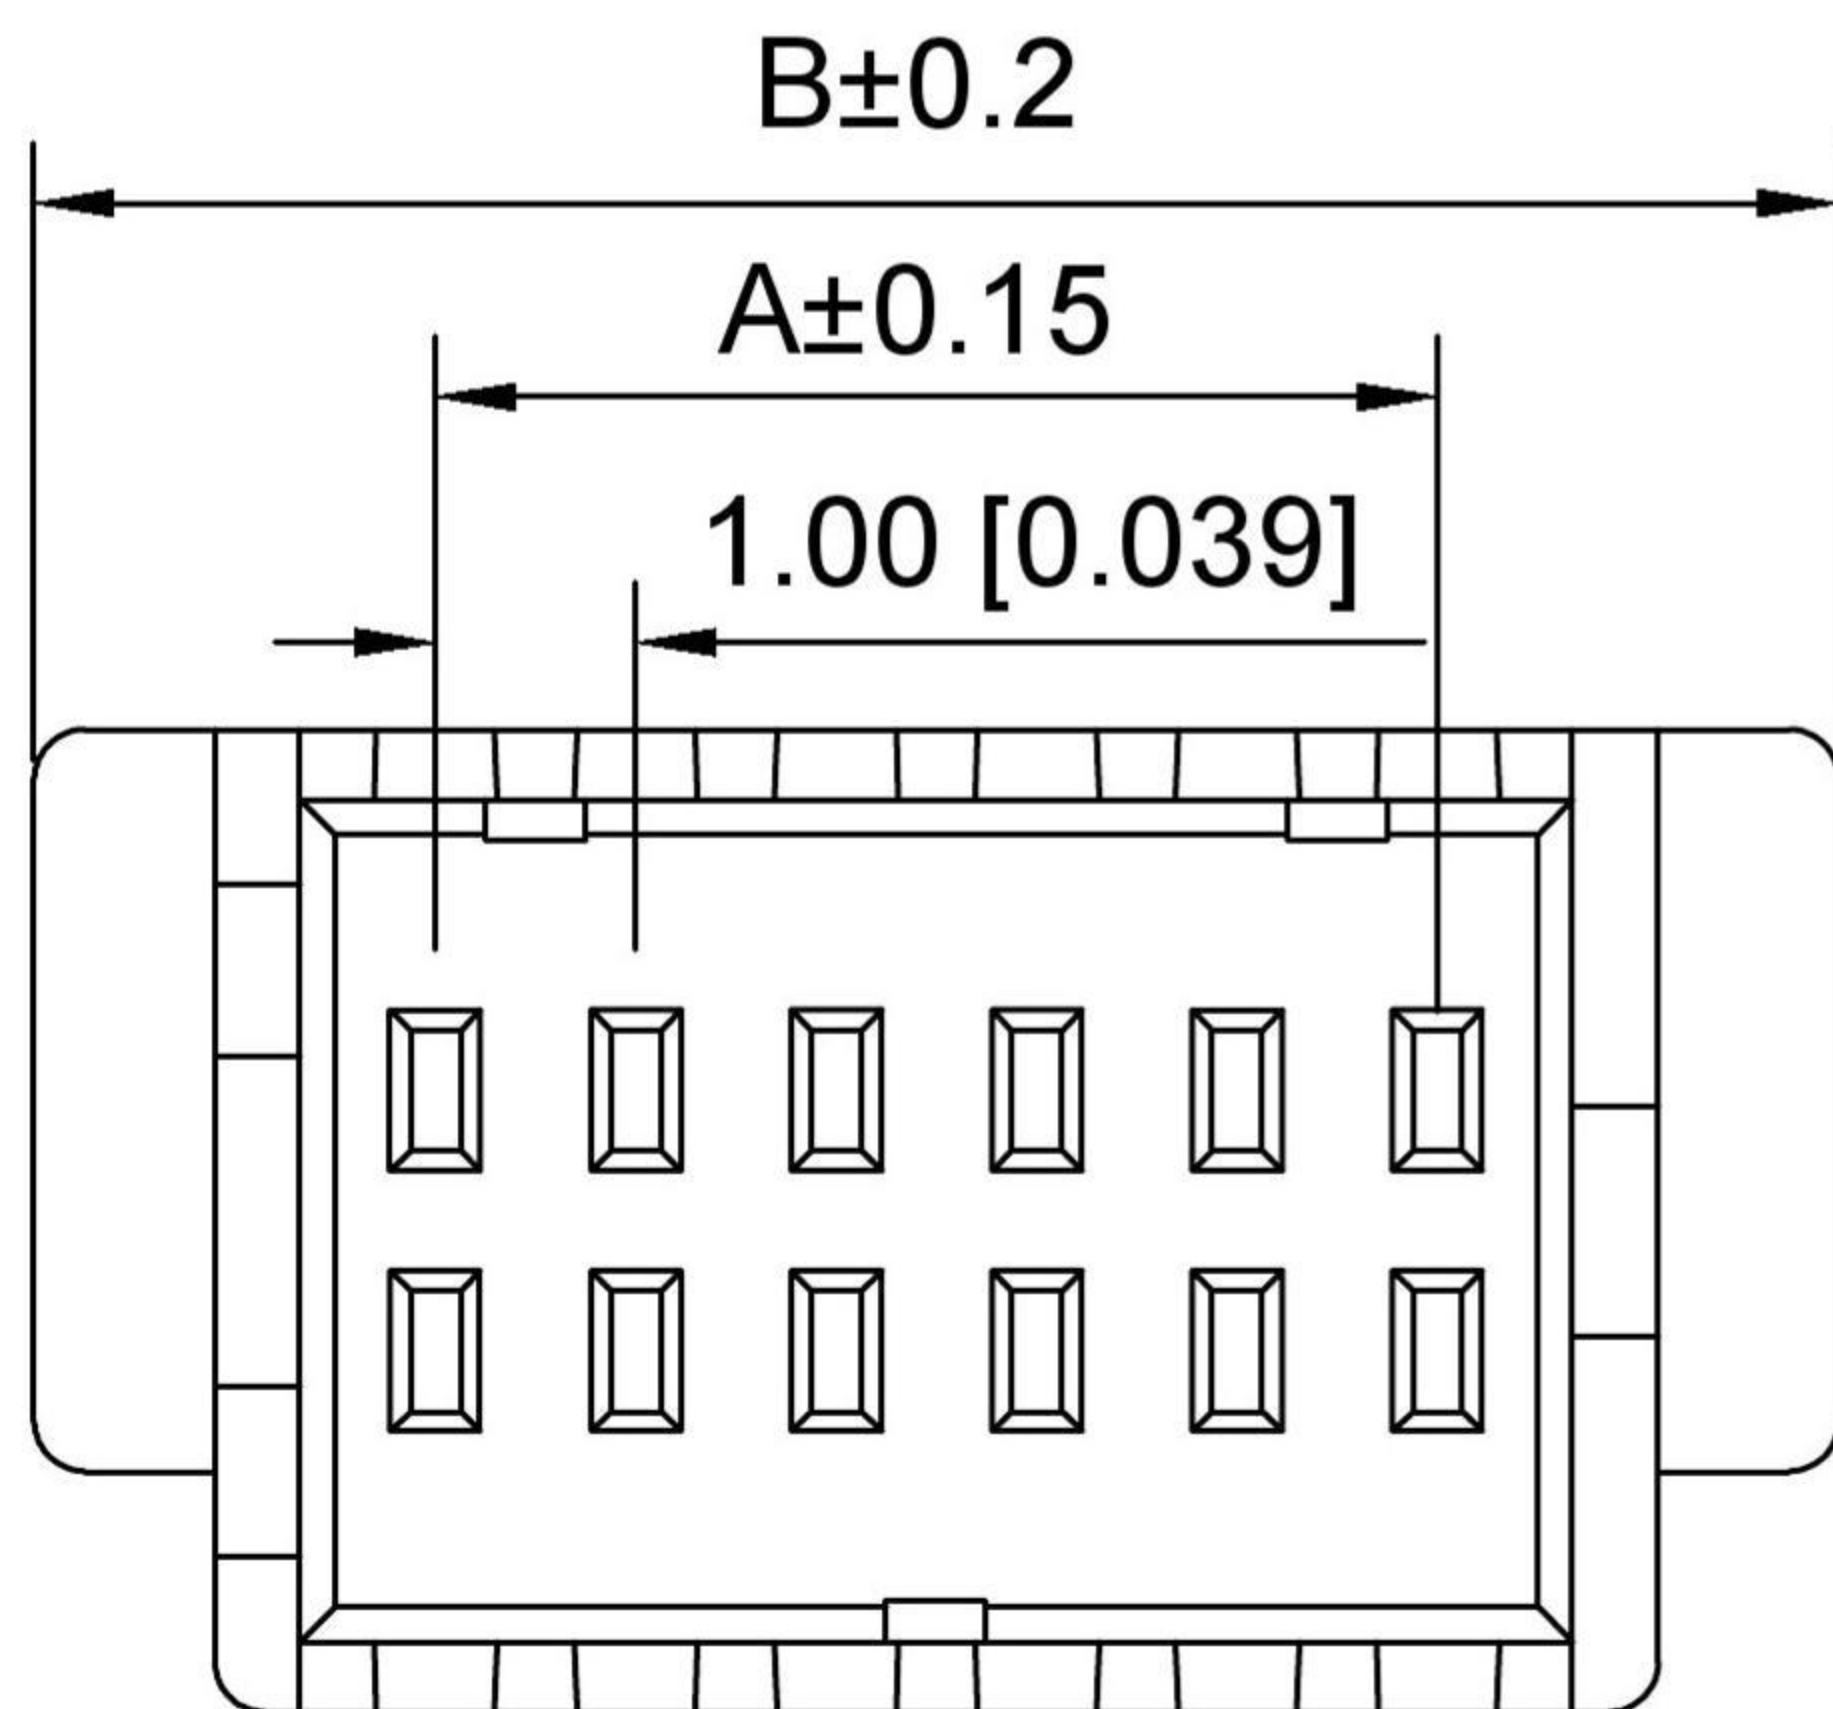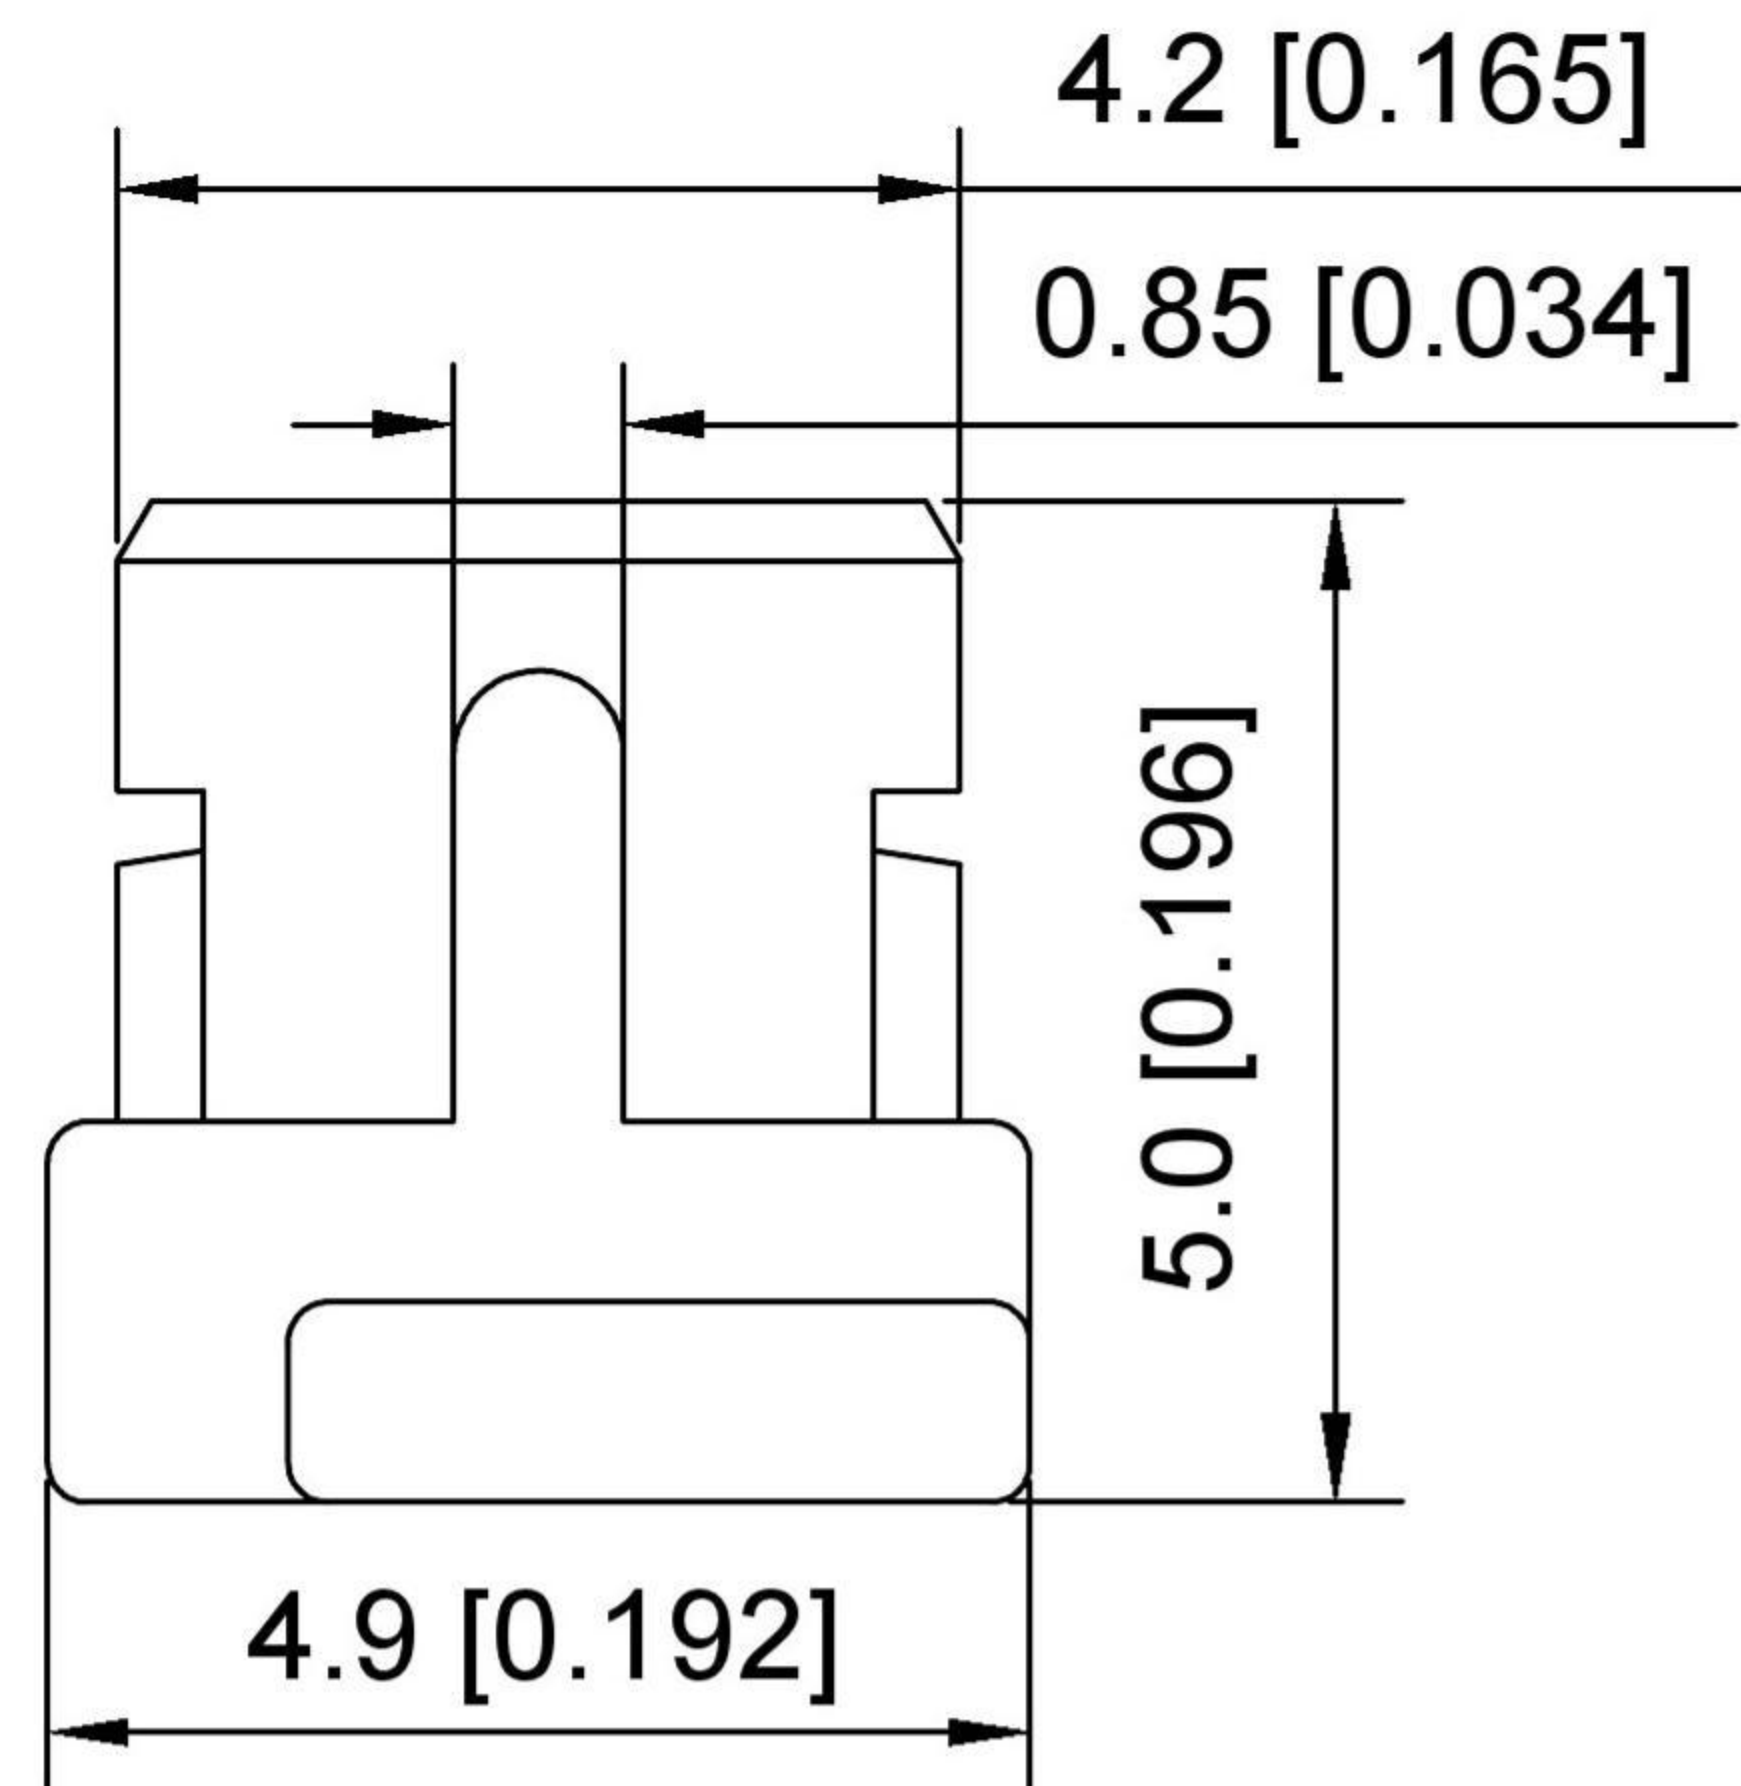

Specifications:

规格:

Voltage rating:50V AC/DC

额定电压: 50V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:500V

AC/minute

耐受电压: 500V AC/分钟

Temperature range:-40℃-+85℃

温度范围: -40℃-+85℃

Insulation resistance: 100MΩ min

绝缘电阻: 100MΩ Min

Contact resistance:20mΩ Max

接触电阻: 20mΩ Max

X1011 H - 2xXX- N0 HF
① ② ③ ④ ⑤

1.Series No

2.Category:H-HSG

3.Row No.Pin No:2x05~2x25

4.Material:N0-Nylon66 (White) UL 94V-0

5:HF-Halogen Free

Poles	Dimensions/mm	
	A	B
2x05	4.00	8.00
2x06	5.00	9.00
2x08	7.00	11.00
2x09	8.00	12.00
2x10	9.00	13.00
2x15	14.00	18.00
2x20	19.00	23.00
2x25	24.00	28.00




X1011H-2xXX-N0HF	Nylon66	X1011W	X1011T
PART NO	Material	Suitable Wafer	Suitable Terminal

DSND		SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR		
DWN		VIEW:	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
			WEIGHT	SHEET	REVISION
				1/1	A0



				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					





DONG GUAN XI BANG ELECTRONIC CO., LTD

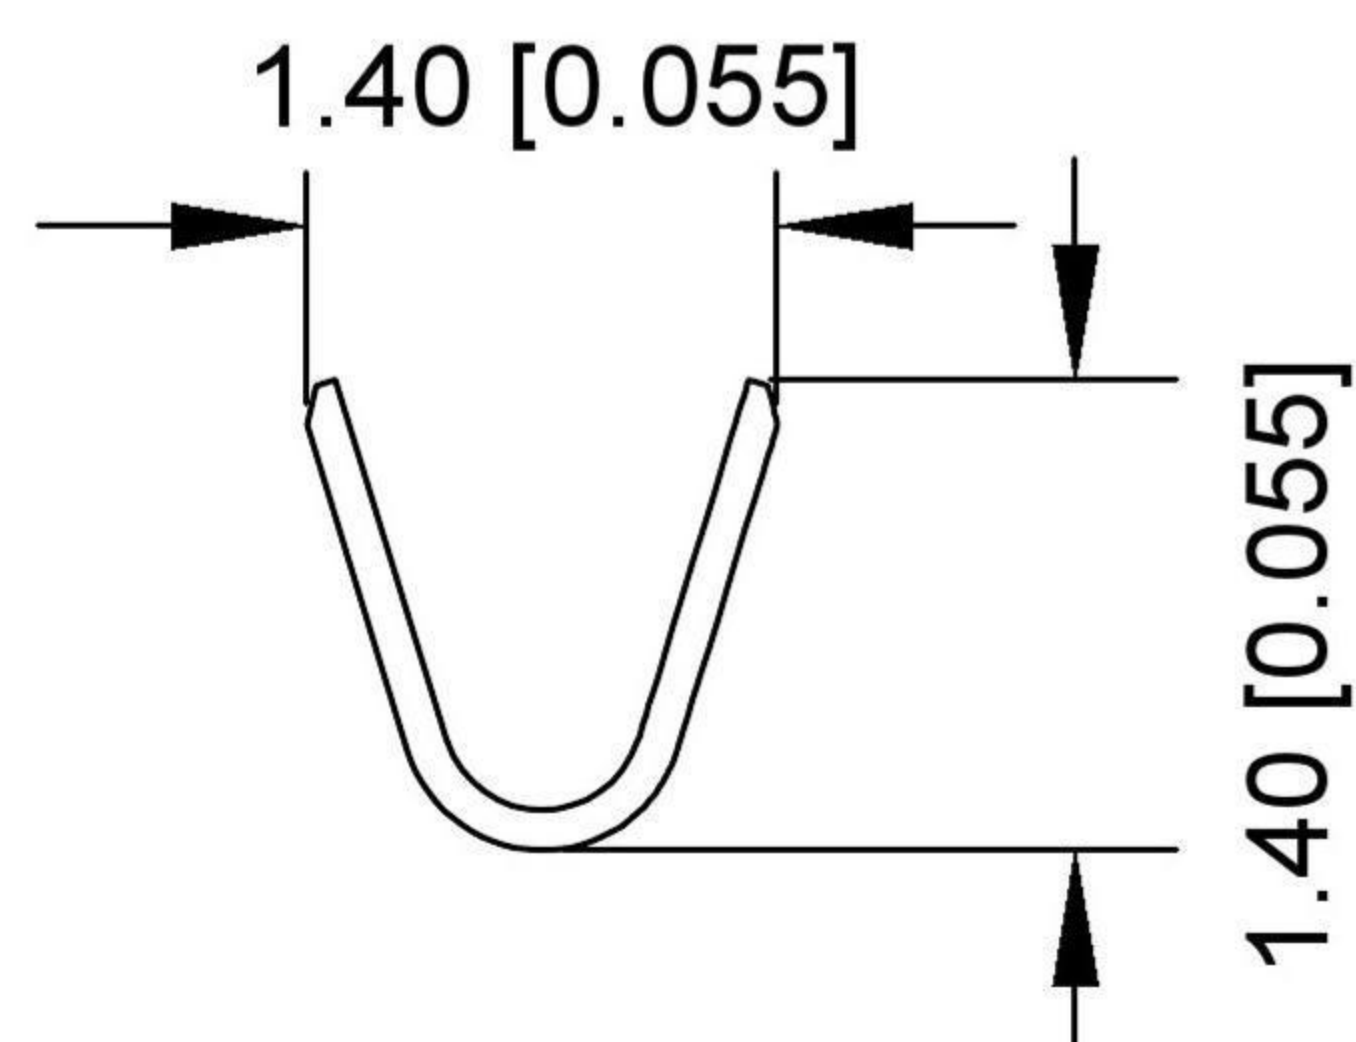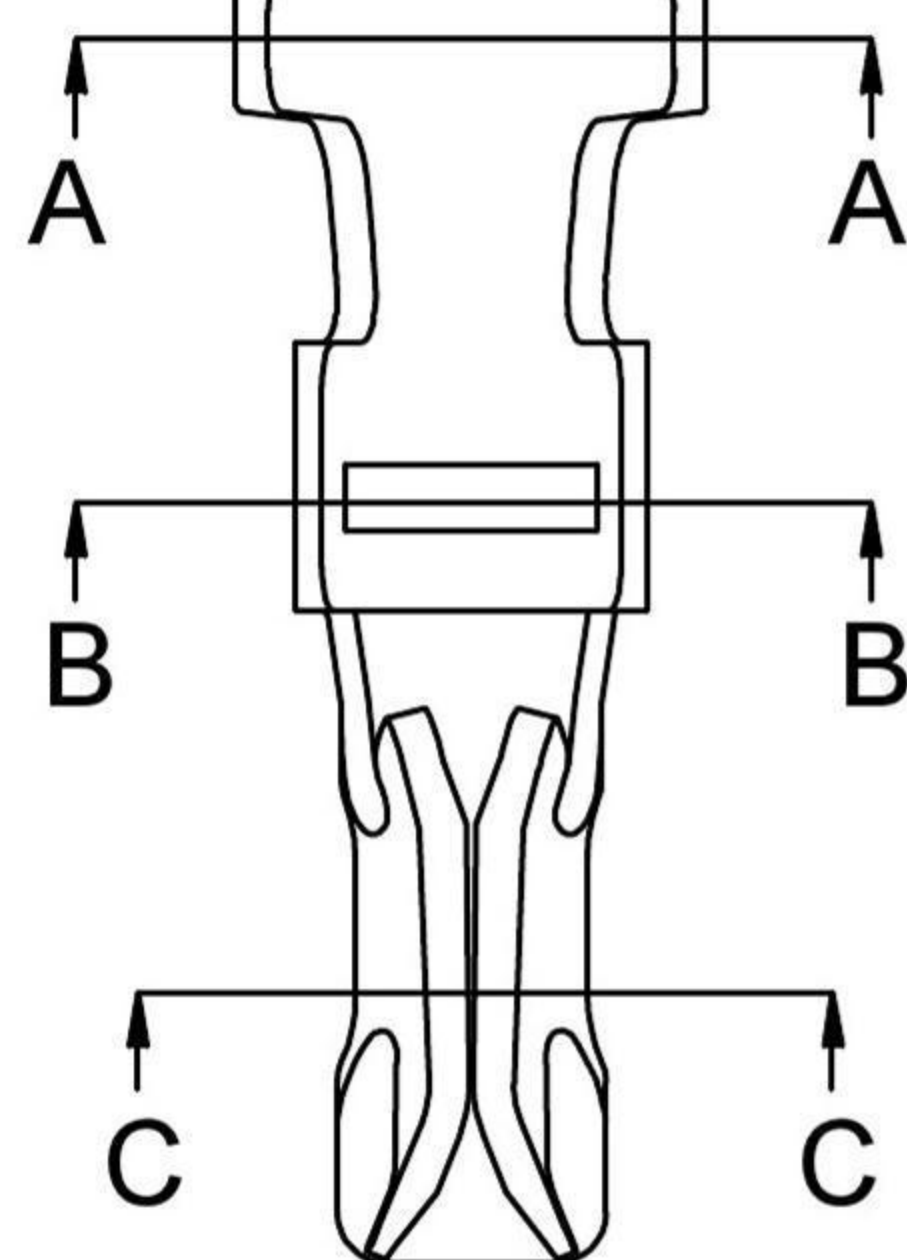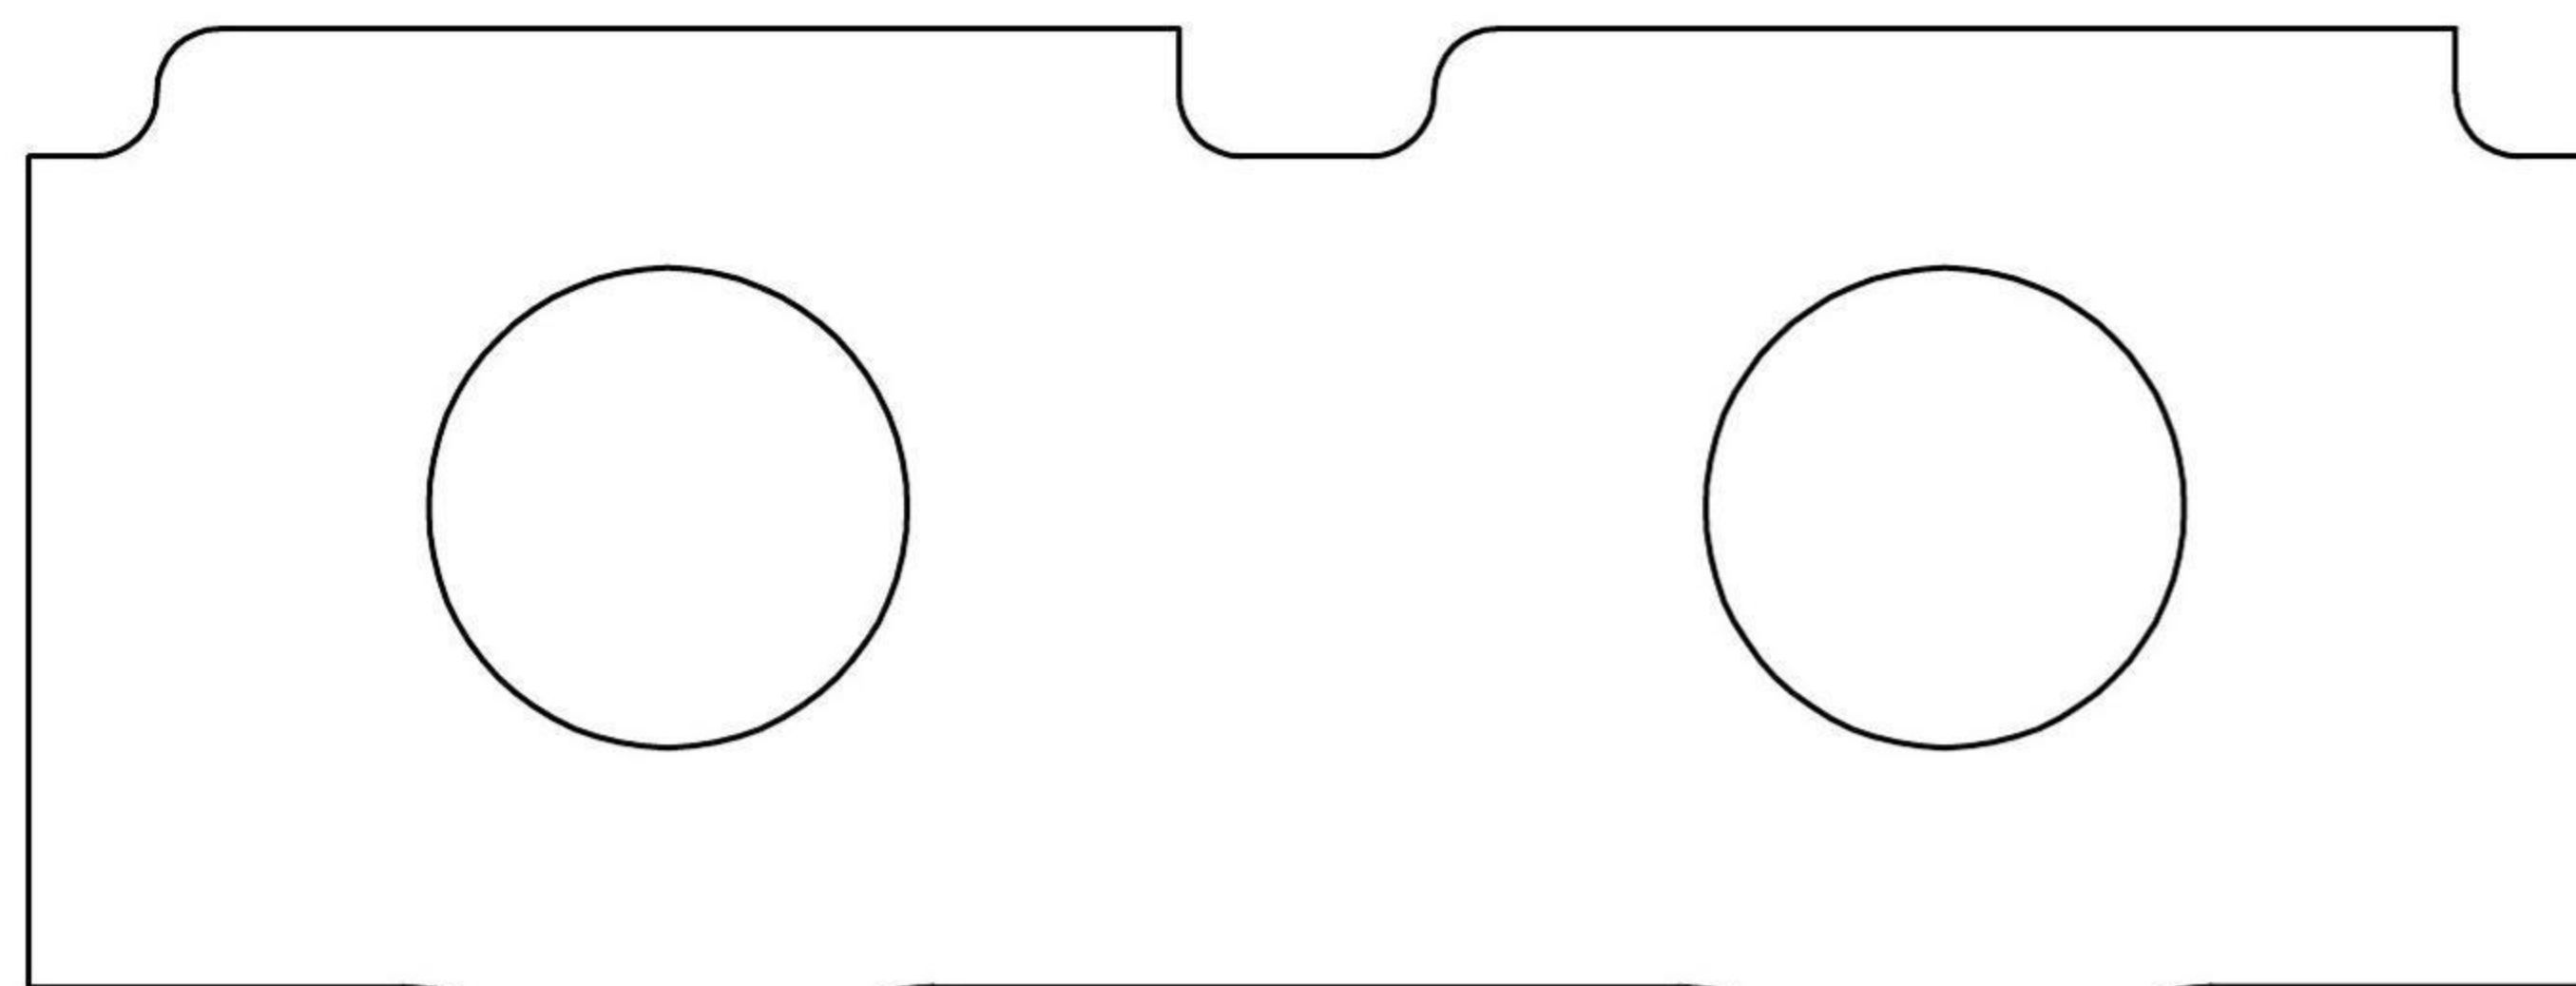

SEC: A-A

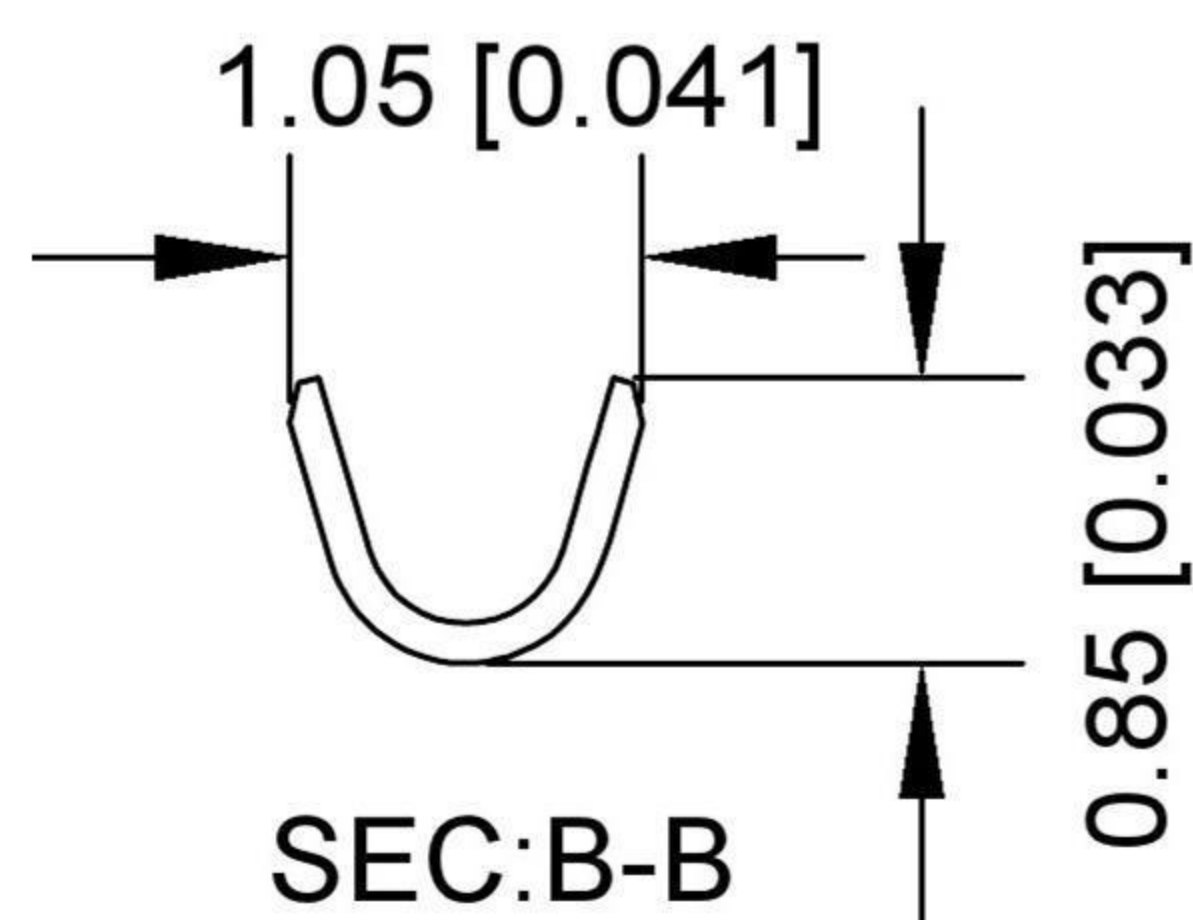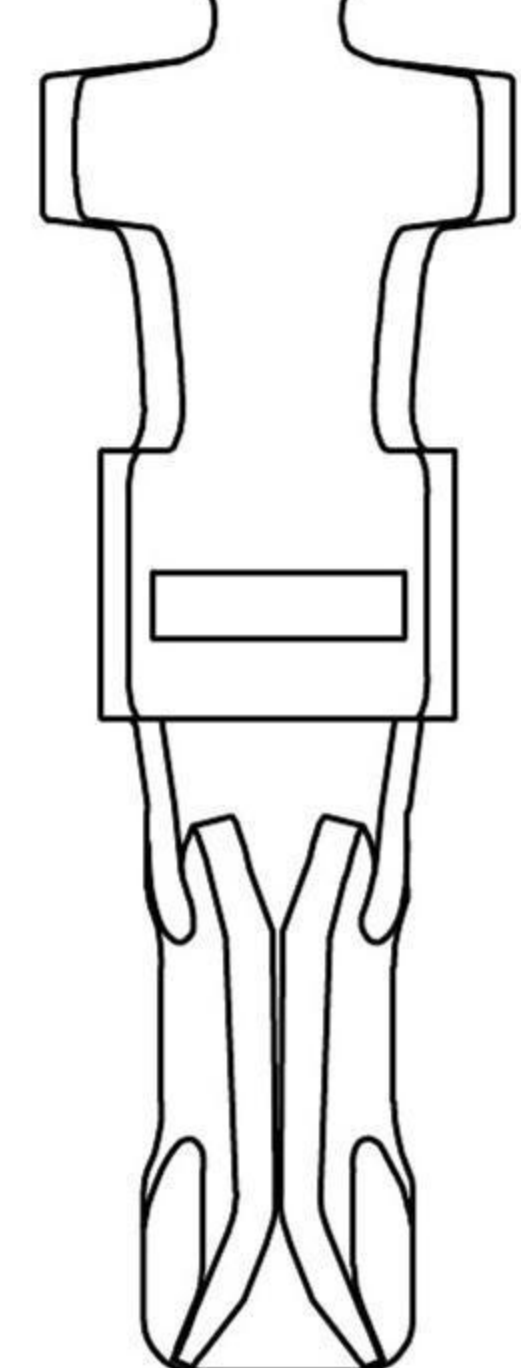

SEC: B-B

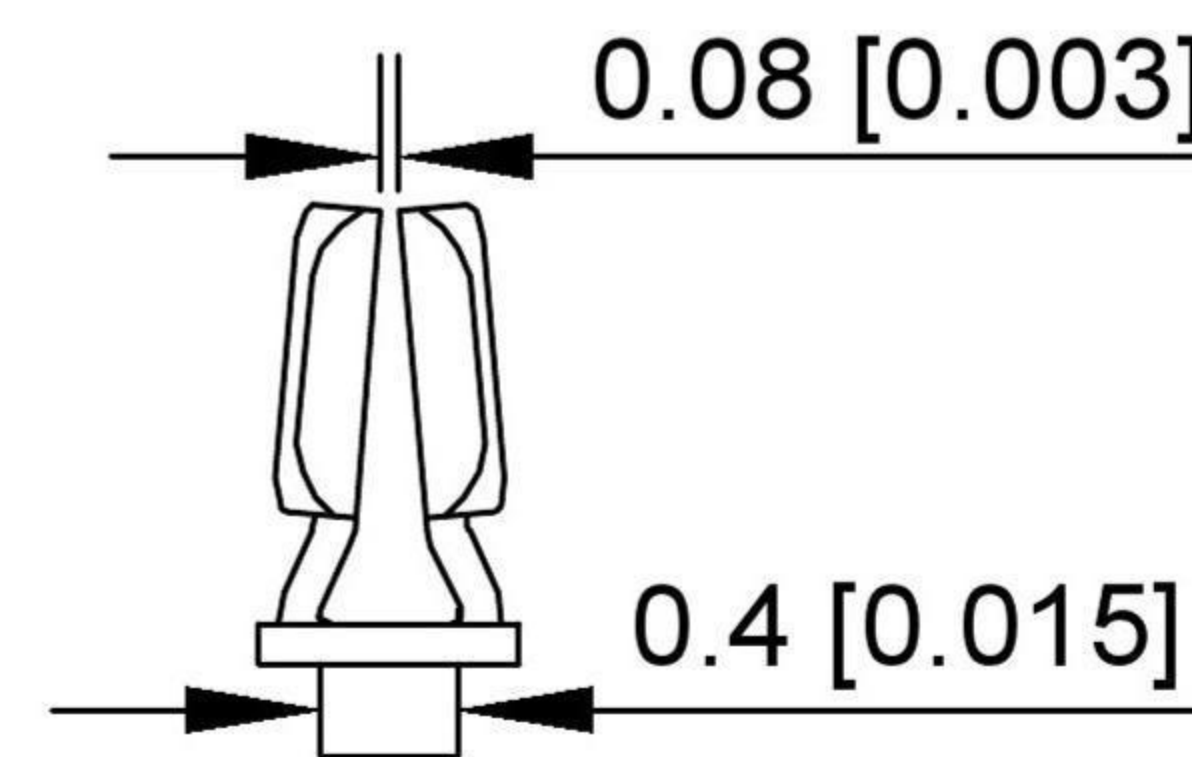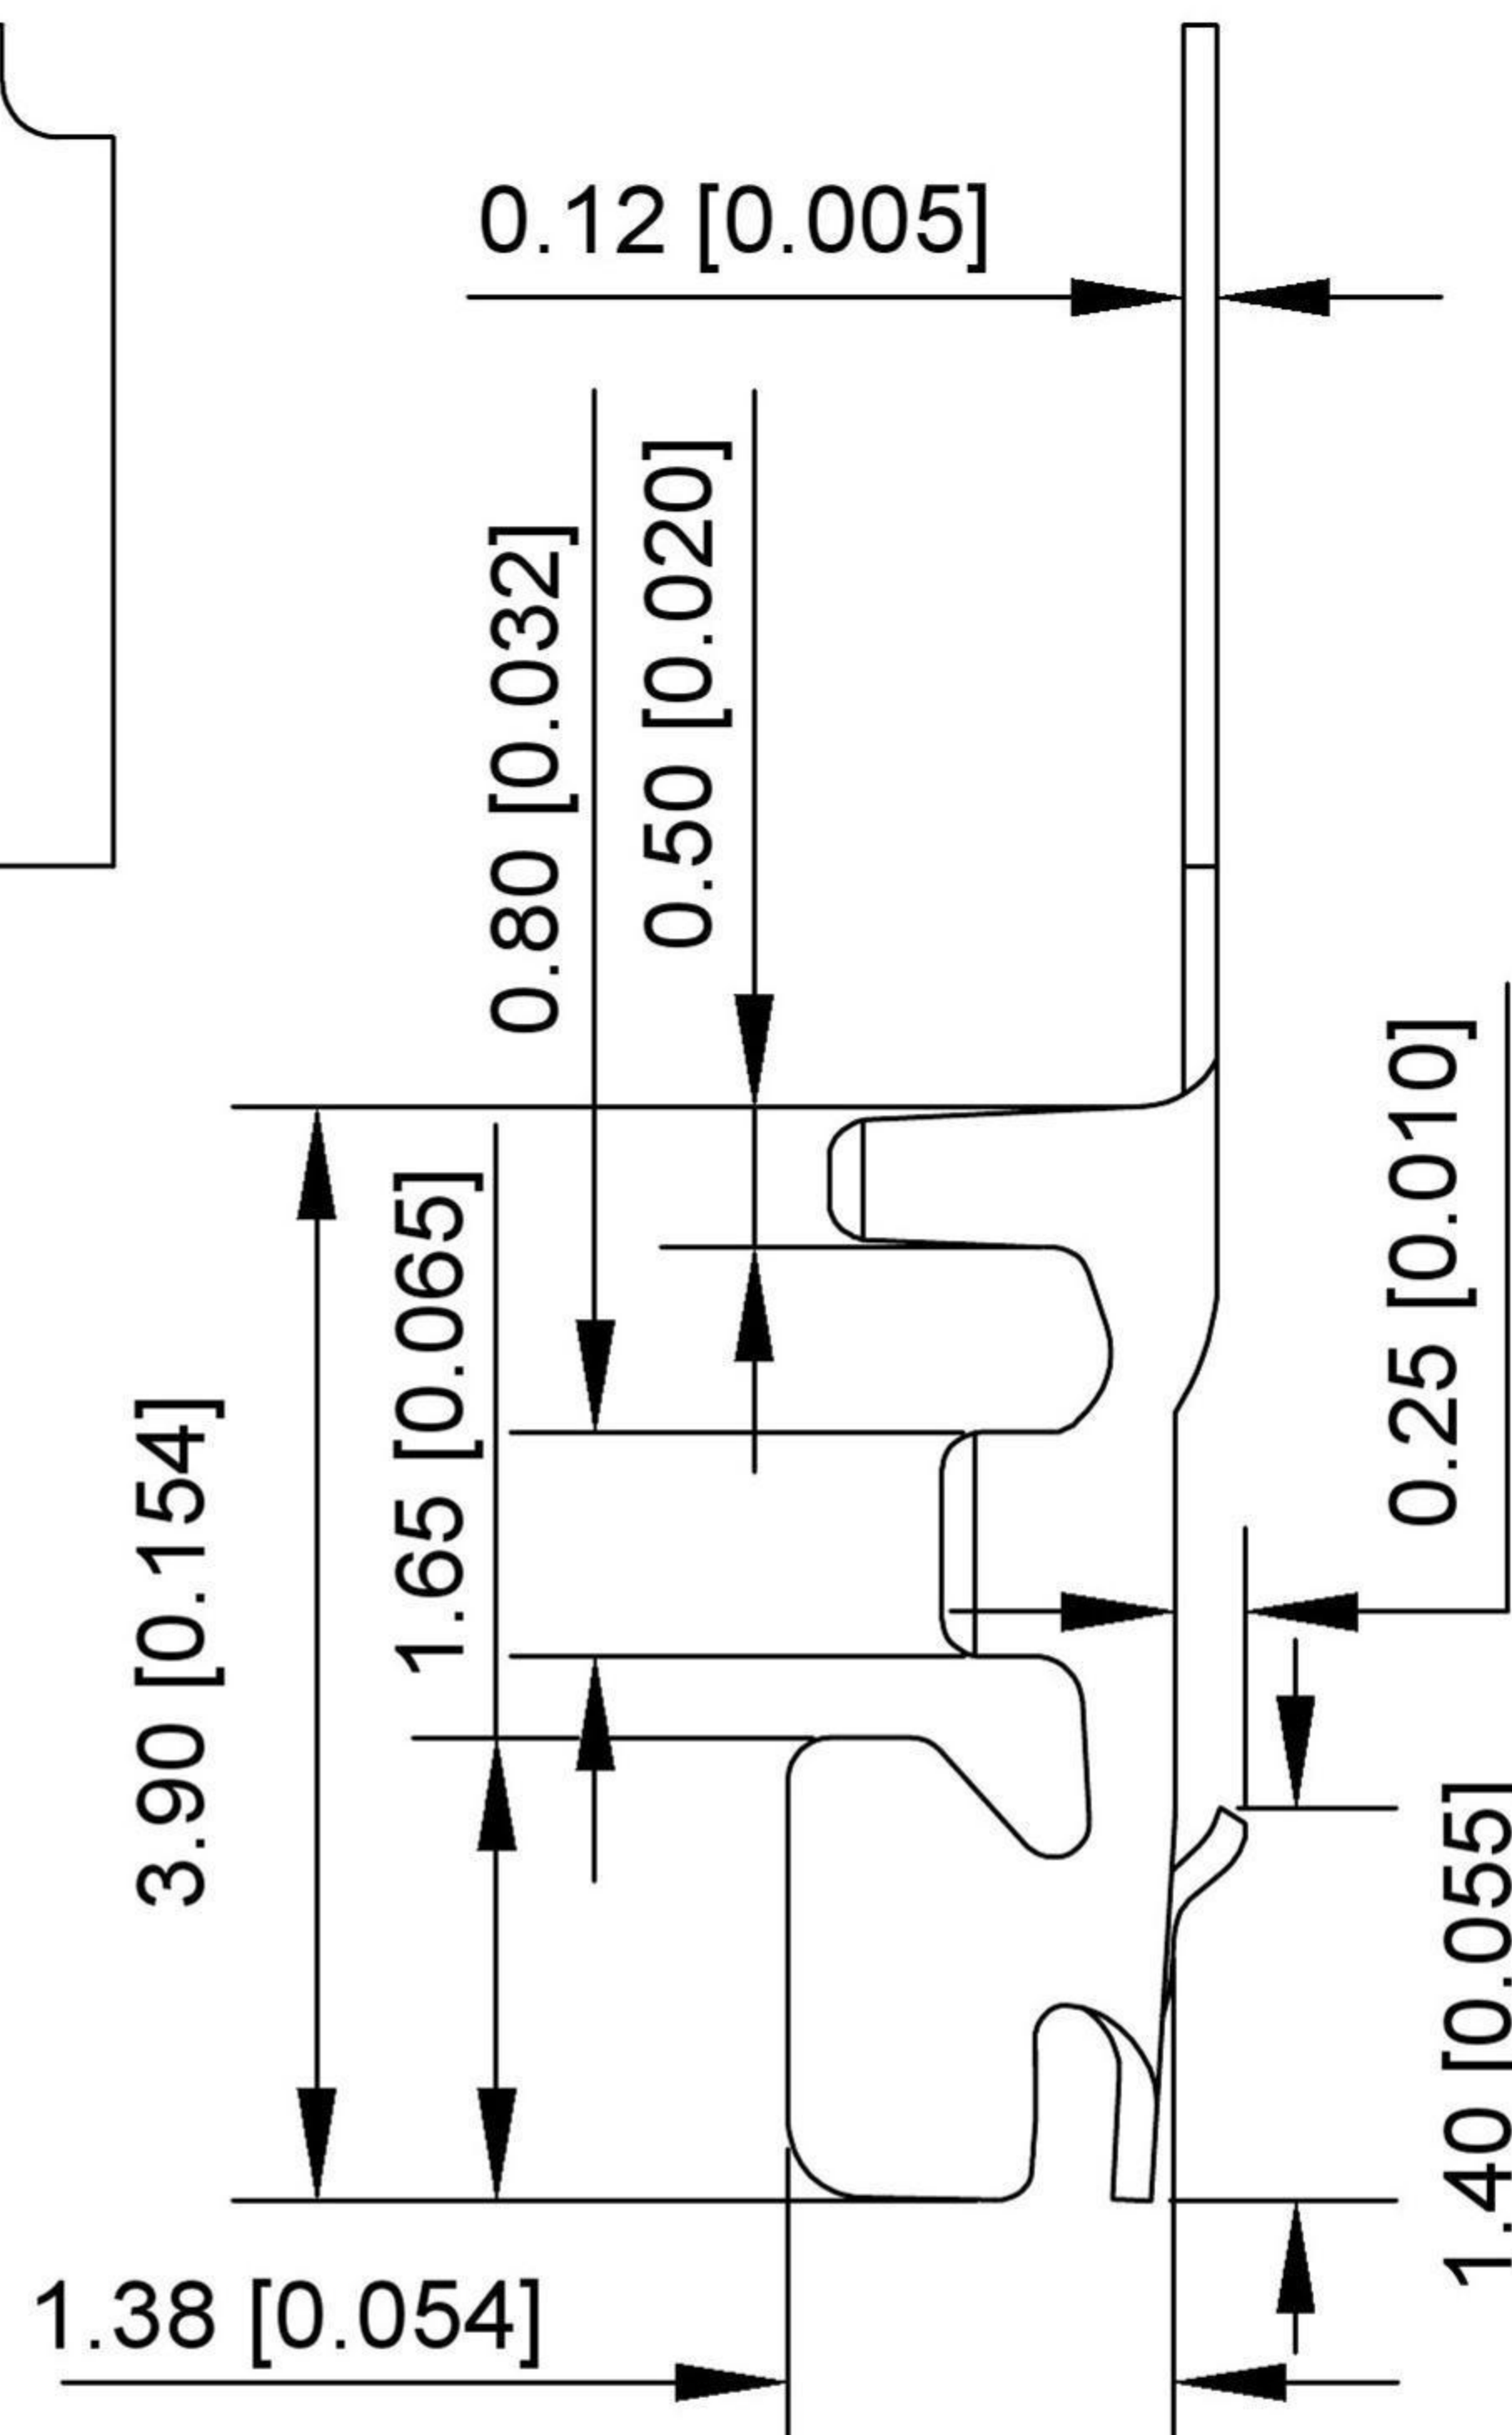

SEC: C-C

■ Specifications :

Voltage rating: 50 V AC / DC
Current rating: 1A AC / DC
Withstanding voltage: 500V AC/minute
Temperature range: -25°C~+85°C
Insulation resistance: $\geq 100M\Omega$
Contact resistance: $\leq 20m\Omega$
Material: Phosphor Bronze
Finish: Plated Tin over Nickel
Applicable wires :AWG#28-#32
Insulation O.D.0.4 to 0.8mm

X1011 T-P SN

① ② ③ ④

- ① Series No
② Category : T-terminal
③ Material:P-Phosphor bronze
④ Plating style:
SN-Bright tin plating

X1011T-PSN	Phosphor bronze	Tin	X1011W	X1011H
PART NO	Material	Plating	Suitable Wafer	Suitable Housing

DSND		SCALE: N/A	MODEL TYPE: BOARD TO BOARD CONNECTOR		
DWN		VIEW: 	PART NO.:		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
ANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
				1/1	A0

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD