





CAD FILE:




ROHS

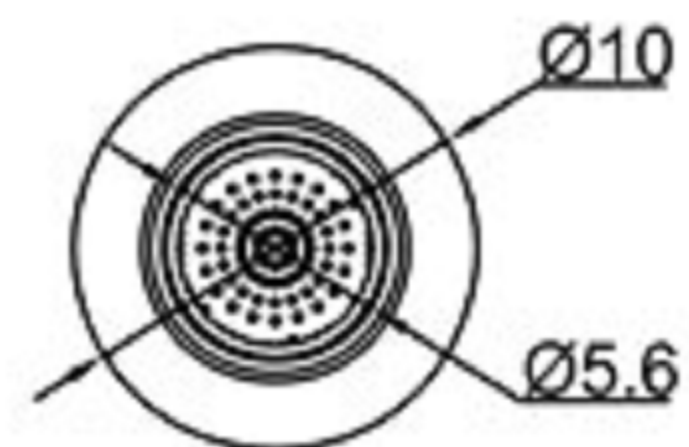


CUT-OUT

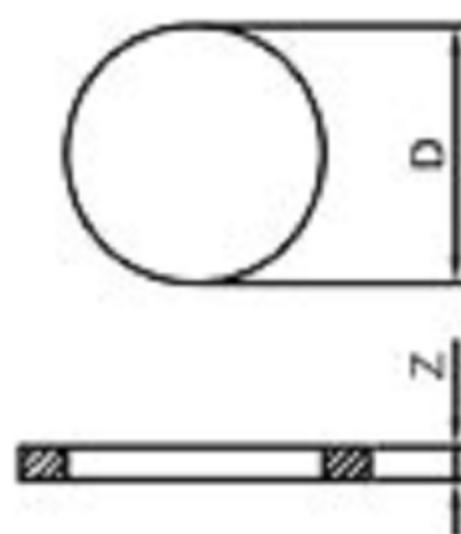

Z	D
0.8~1.0	8.0-8.1
1.0~1.7	8.1~8.25

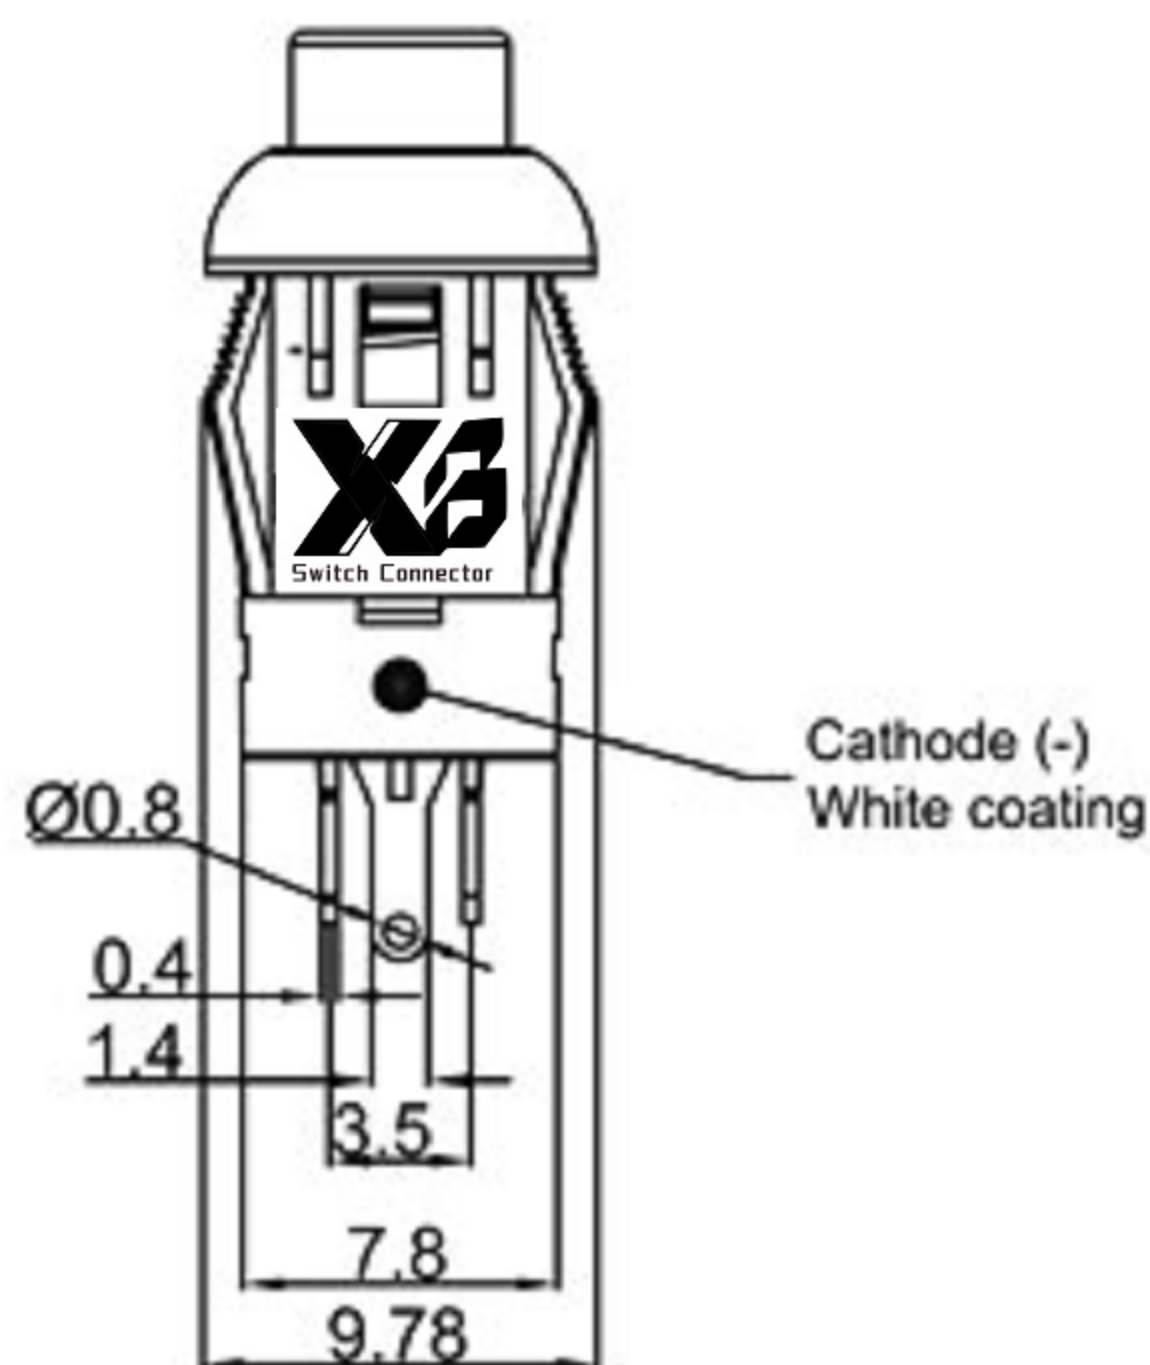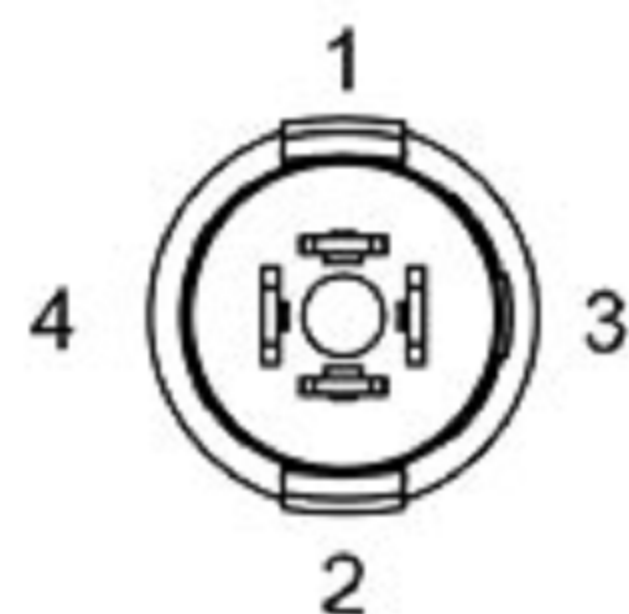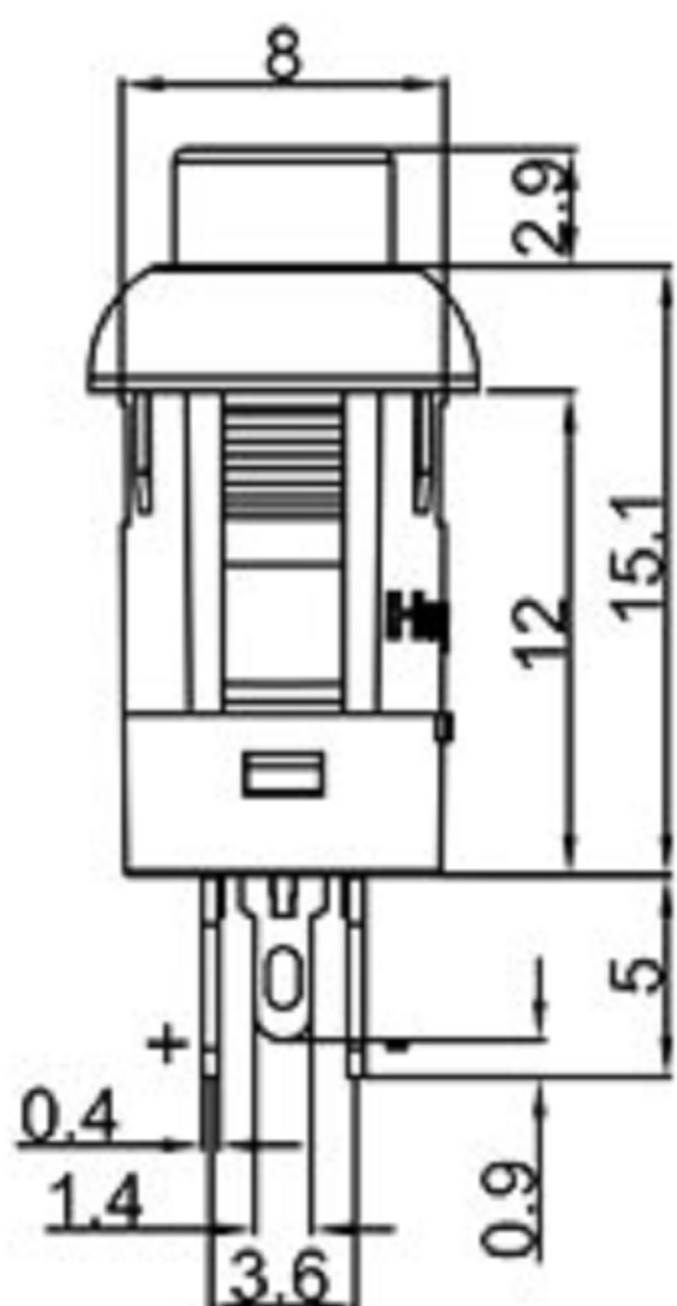

CIRCUIT

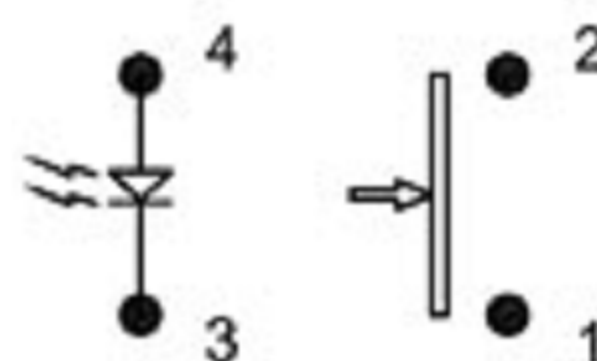

Rating: 0.2A 36VDC
Contact Resistance: 50mΩ Max.
Insulation Resistance: 100MΩ Min.
Dielectric Strength: AC 500V 1 minute
Total travel: 1.8±0.3mm
Operating Force: 200±100gf
Mechanical Life: Over 30,000 cycles
Electrical Life: Over 10,000 cycles
Operating Temperature: -20°C~+85°C
Manual Welding: 350°C for 3 Seconds
Function: OFF - (ON)

MATERIAL:

Base: PA66, UL rated: 94 V-2 Min;
Cap: PC;
Terminal: Copper, Golden plated;

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Button Switch With Light			UNIT : mm	DRWG NO. XB-LED-TB-11-1N
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONICS CO., LTD.				