

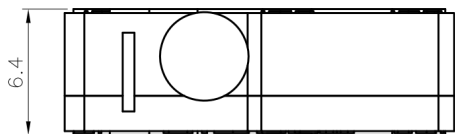
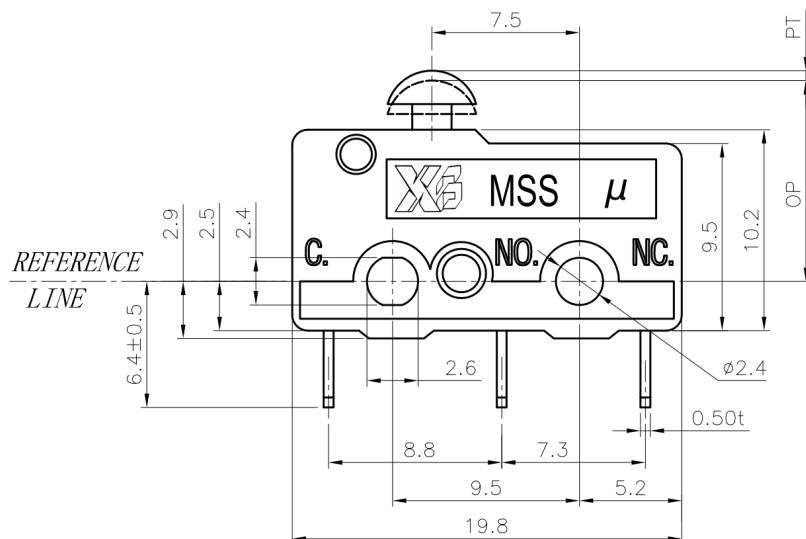
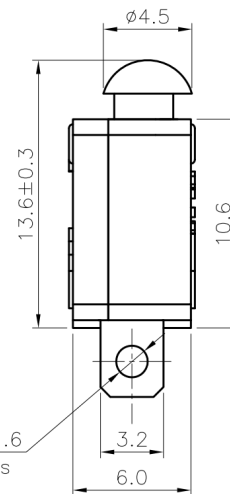


CAD FILE:

ROHS



CIRCUIT

REFERENCE
LINE

Mounting hole size

Note:**Electrical Characteristics:**

Rating : 5A 125VAC , 3A 250VAC

Contact Resistance : 50mΩ max. (Initial)

Insulation Resistance : 100MΩ min. (at 500 VDC)

Dielectric Strength : AC 1500V (50/60Hz for 1 minute).

Electrically Life : 100,000 cycles min.

Mechanical Characteristics:

Operating Force (OF) : 250±100gf .

Pre-travel (PT) : 0.9 mm max.

Operating Position (OP) : 10.1±0.8 mm

Operating temperature : -25°C ~ 85°C.

10	COM TERMINAL	H65(C2680)	1	Ag PLATED
09	RIVET	Al	1	
08	NO TERMINAL	C1100	1	Ag PLATED
07	NC TERMINAL	C1100	1	Ag PLATED
06	MOVABLE CONTACT	SILVER ALLOY	1	
05	CONTACT PLATE	C5210	1	Ag PLATED
04	SPRING	SUS304	1	
03	HOUSING	PA	1	BLACK
02	KONB	POM	1	BLACK
01	COVER	PA	1	BLACK
ITEM	PART NAME	MATERIAL	Q'TY	FINISHING

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch				
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	UNIT : mm				
2	COVER	STEEL STRIP	1	Ni PLATED	MODEL: XB-MSS051F				
1	KNOB	PPA	1	BLACK	SCALE: 5:1				
NO.	PARTS	MATERIALS	Q'TY	FINISH	DRWG NO.: XB-MSS051F				
					DWN. JUN. YANG 2012-9-25				
					CHK'D DONG. PANG 2012-9-25				
					APPD. ZENQ. CHEN 2012-9-25				

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.