CAD FILE:

ROHS

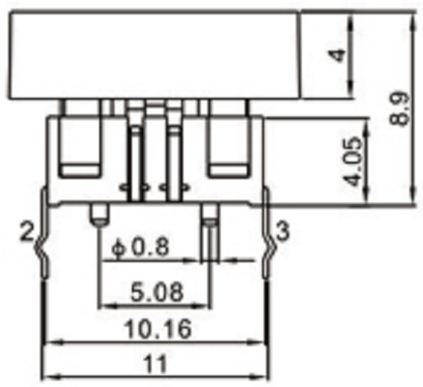

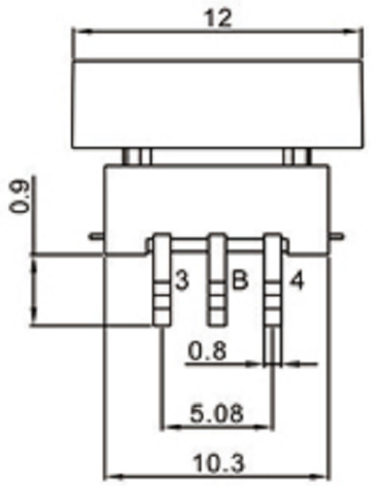

P.C.B TYPE

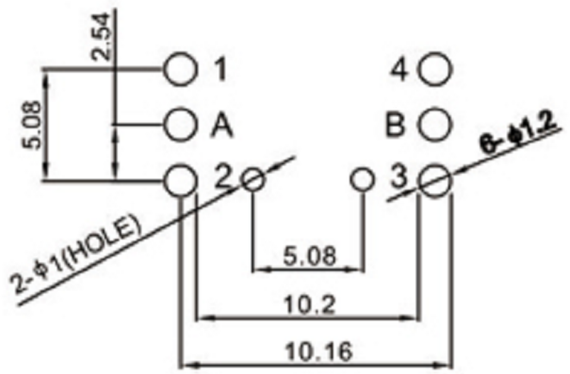

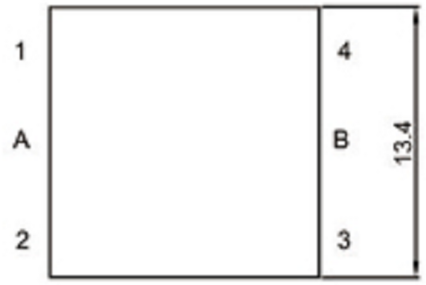

SINGLE COLOR



TWO COLOR



RGB COLOR

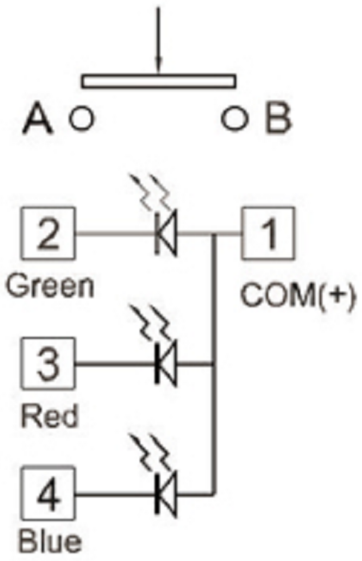

产品规格:

Circuit:SPST 1P1T with LED
Current Rating:50mA
Voltage Rating:12VDC
Dielectric withstanding voltage :250VAC for 1 minute
Contact Resistance:100mS Max(intial)
Insulation Resistance:1 00MQ Min
Operating Force:250+50gf
Total Travel:0.4+0.1 5mm
Opearating life:200,000 Cycles Min
Soldear Specifications:260**°C for 3 Seconds**
Function:Momentary
Openrating Temperature:-20°C~+70°C

NO.	PARTS	MATERIALS	Q'TY	FINISH
8				
7				
6				
5				
4	CONTACT	SUS	1	Ag CLAD
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED
2	COVER	STEEL STRIP	1	Ni PLATED
1	KNOB	PPA	1	BLACK

TOLERANCE UNLESS SPECIFIED				
WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.

TITLE : Light Touch Switch — UNIT : mm — DRWG NO.:XB-TS-LED-1289F

MODEL: — SCALE: 5:1

DWN.	JUN. YANG	2012-9-25
CHK'D	DONG. PANG	2012-9-25
APPD.	ZENQ. CHEN	2012-9-25

Switch Connector

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.