

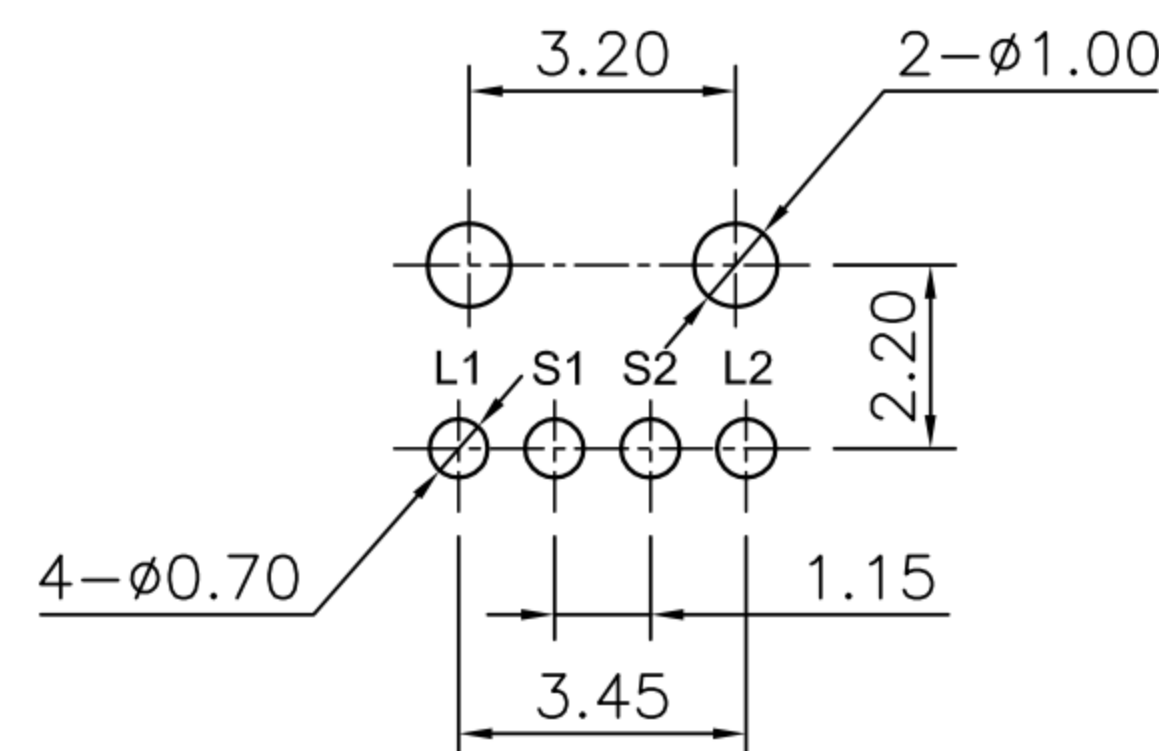


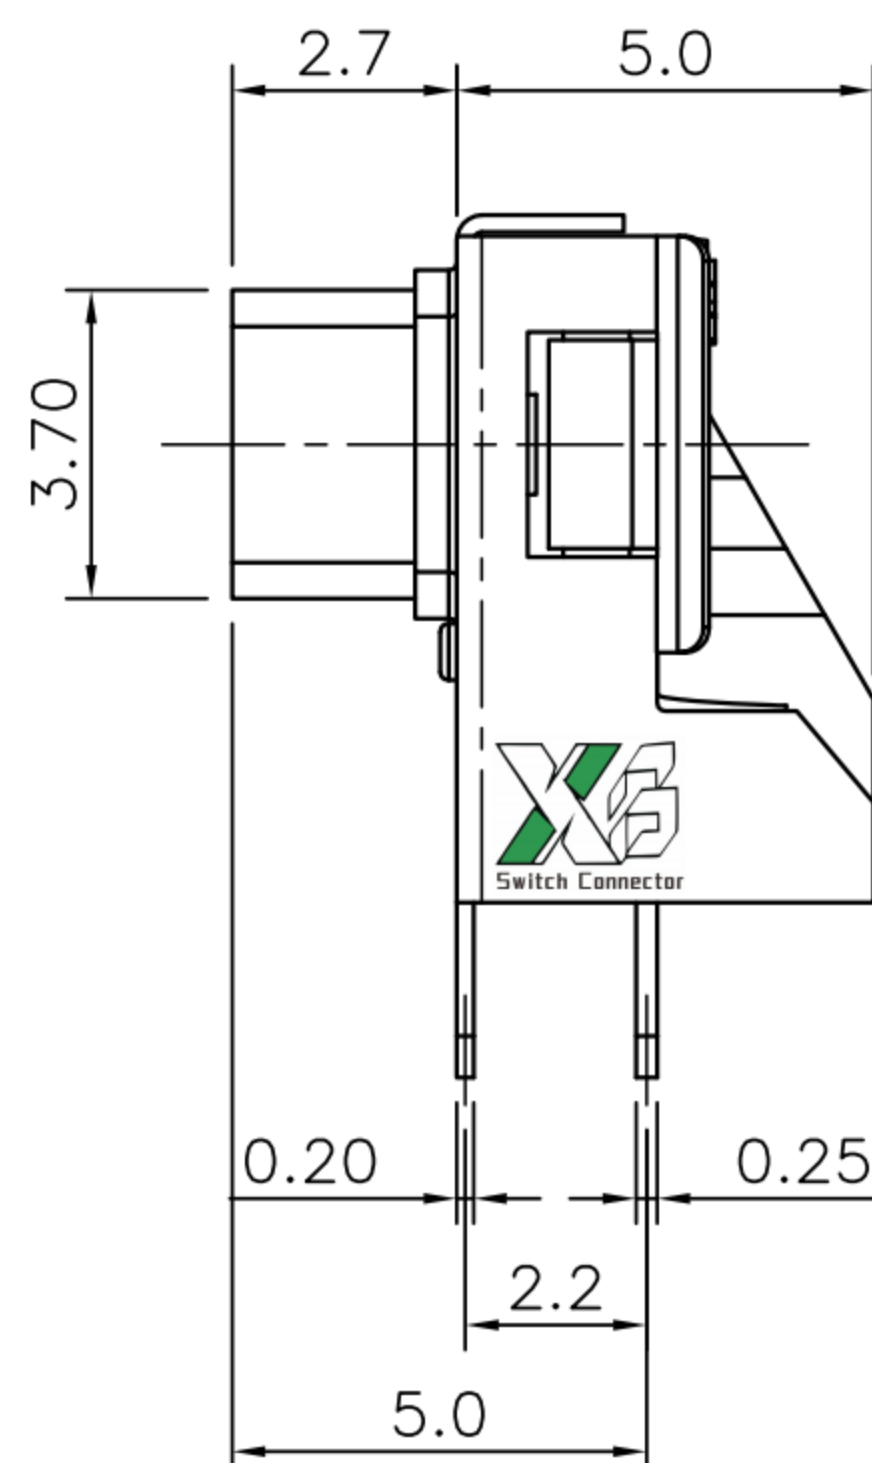




CAD FILE:

ROHS

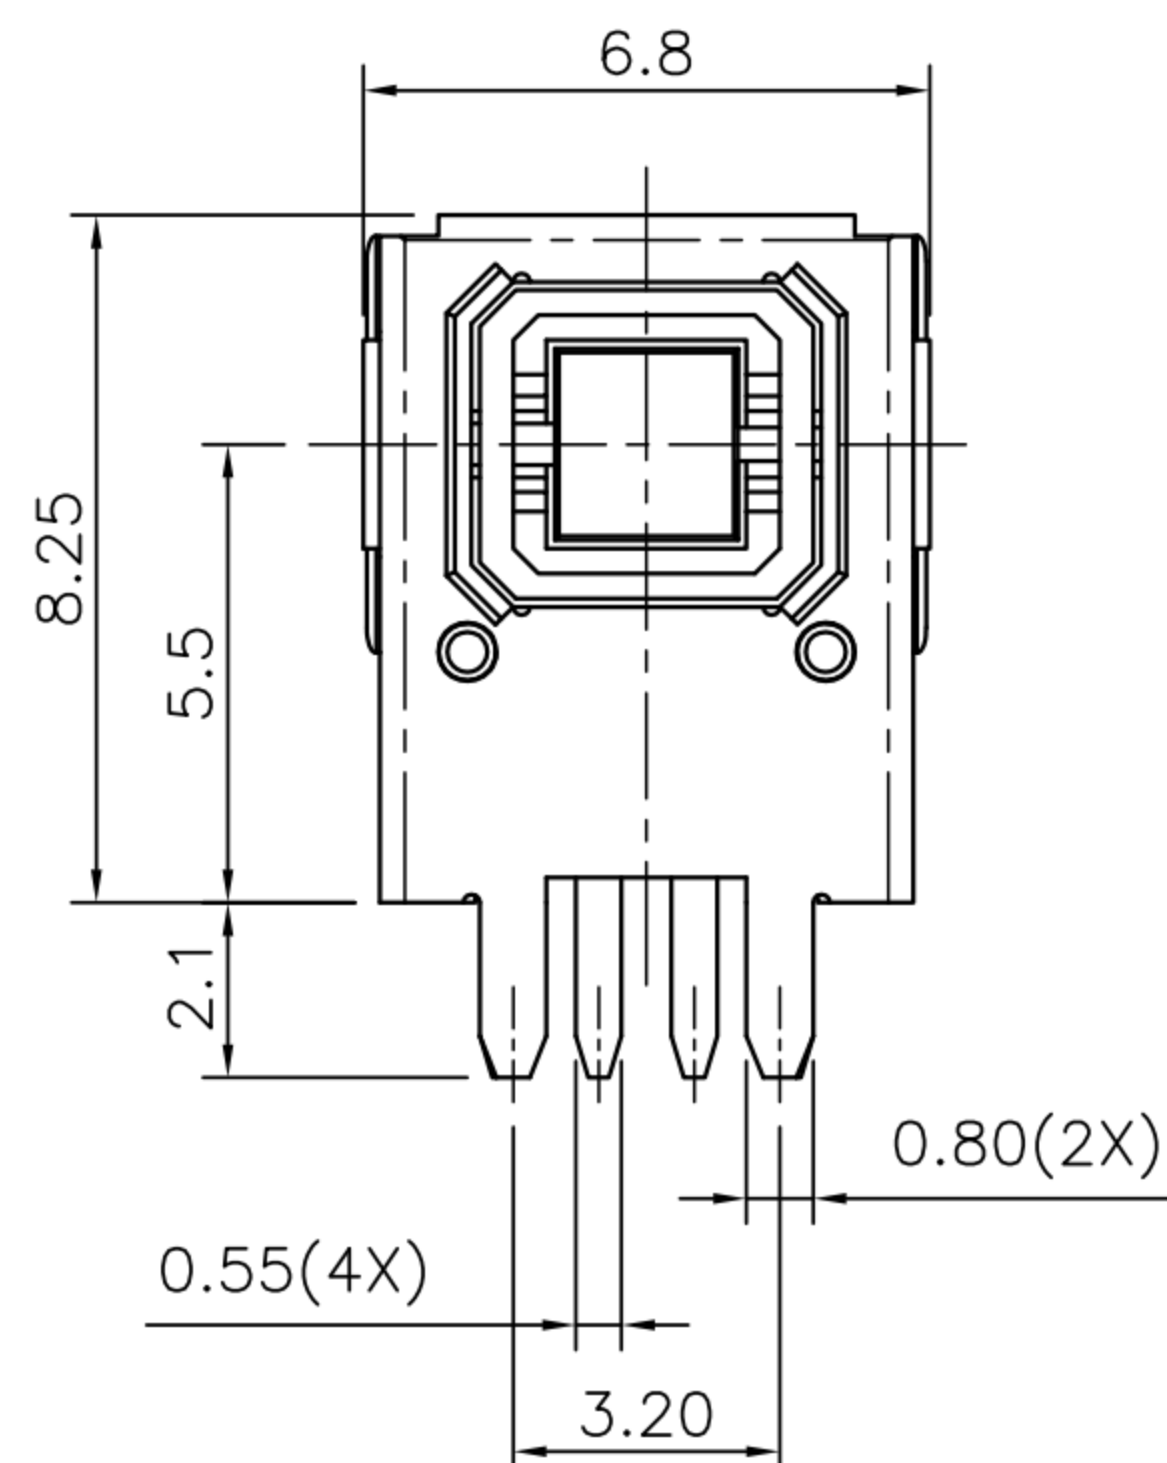


P.C.B.LAYOUT


TOP VIEW

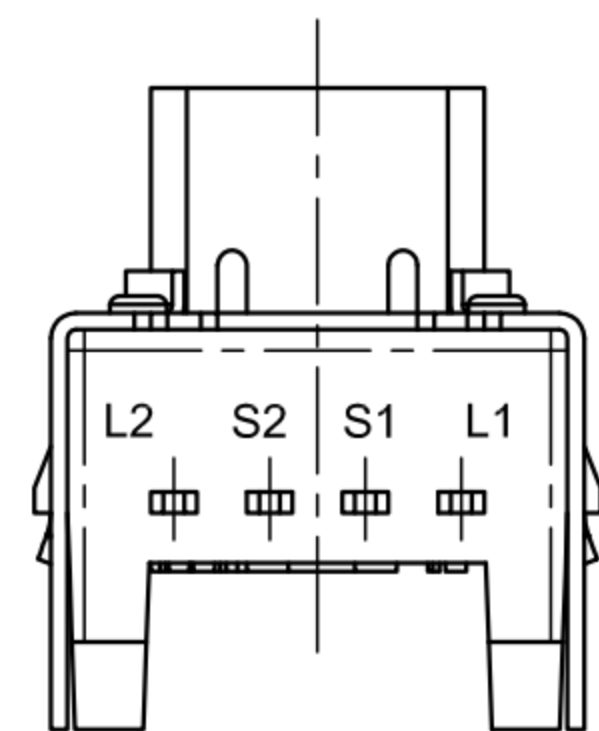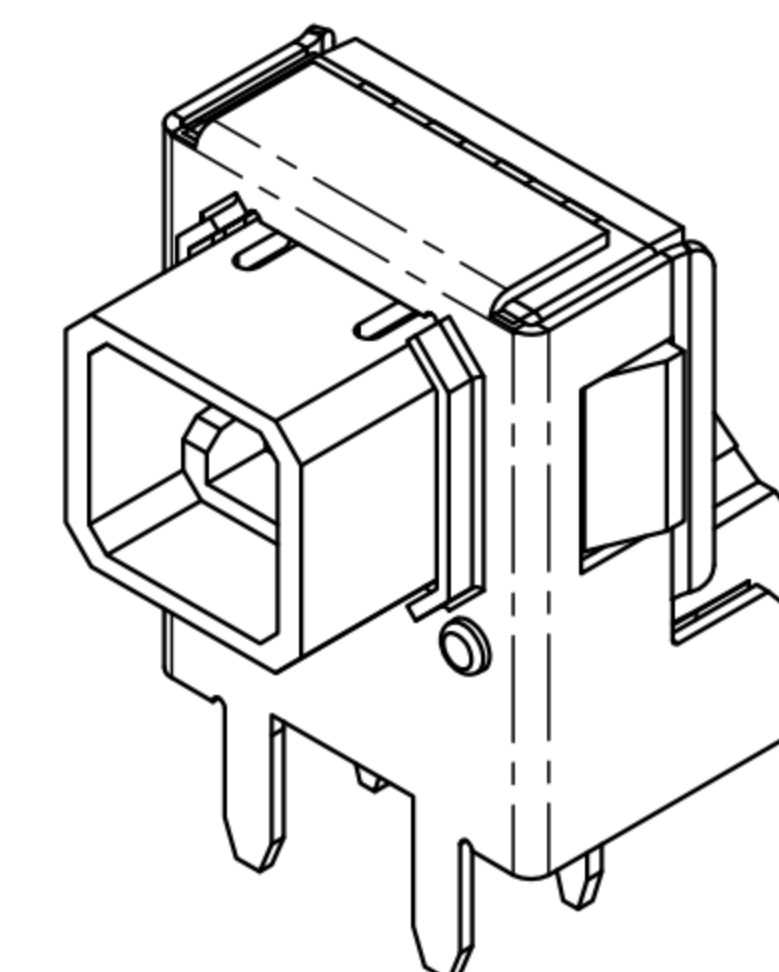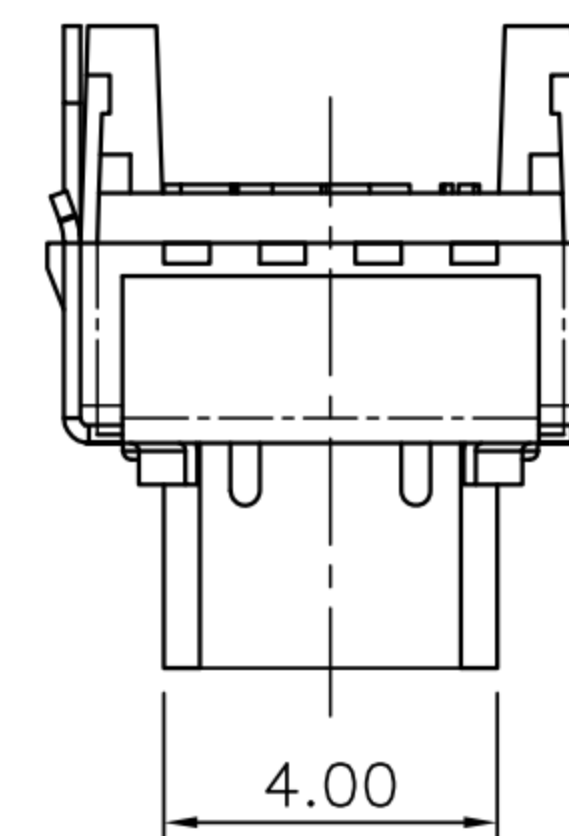

BOTTOM VIEW

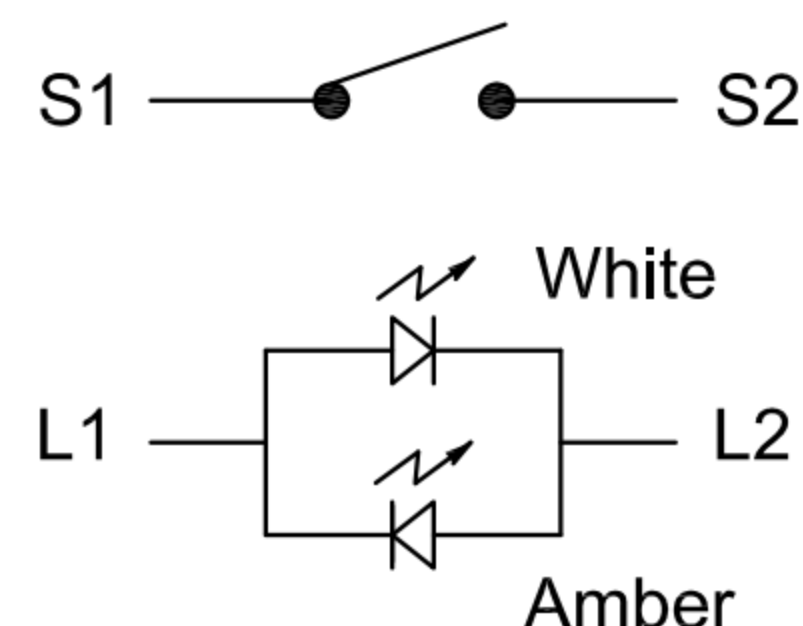

CIRCUIT

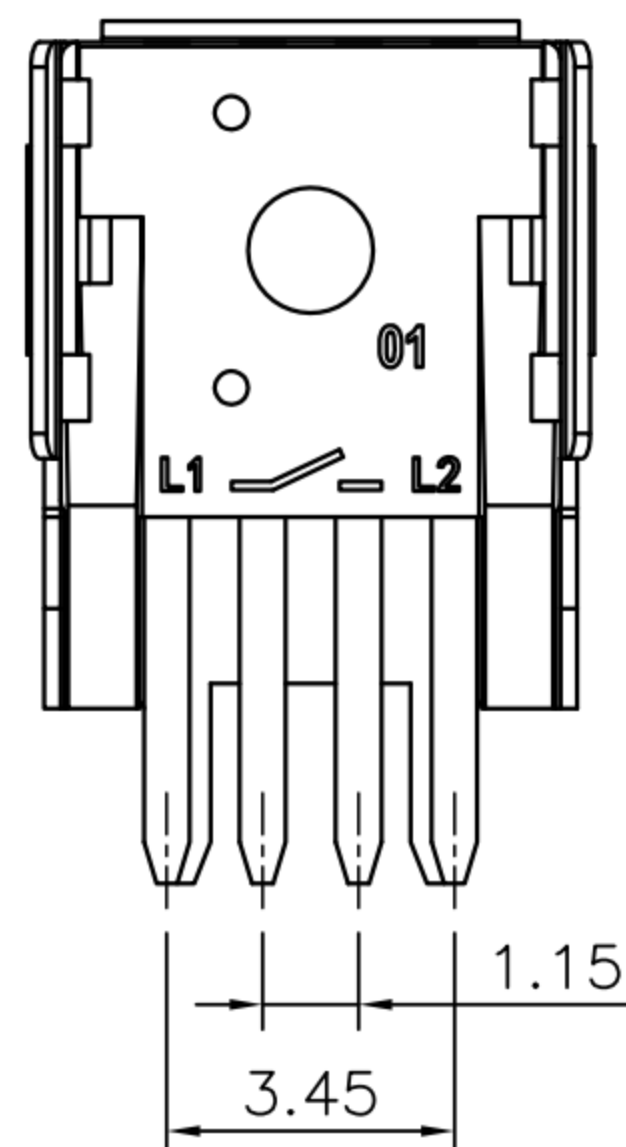

Note:

Electrical Characteristics:

Rating : 50mA 12VDC

Contact Resistance: 100mΩ max. (Initial)

Insulation Resistance: 100MΩ min. (at 250 VDC)

Dielectric Strength: AC 250V(50/60Hz) for 1 minute.

Bounce: 5 m sec MAX

LED operating current: 20mA max.

Mechanical Characteristics:

Actuating force: 220±50gf

Travel: 0.25±0.1mm

Return force: 50gf MIN

Stop strength: 2Kg / 60 sec

Stem strength: 1Kg / 60 sec

Operating Life: 100,000 cycles min.

Operating temperature: -20°C to 70°C.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Light Touch Switch			UNIT : mm	DRWG NO.: XB-TS-LED-1RL-52
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONI CS CO., LTD.				