

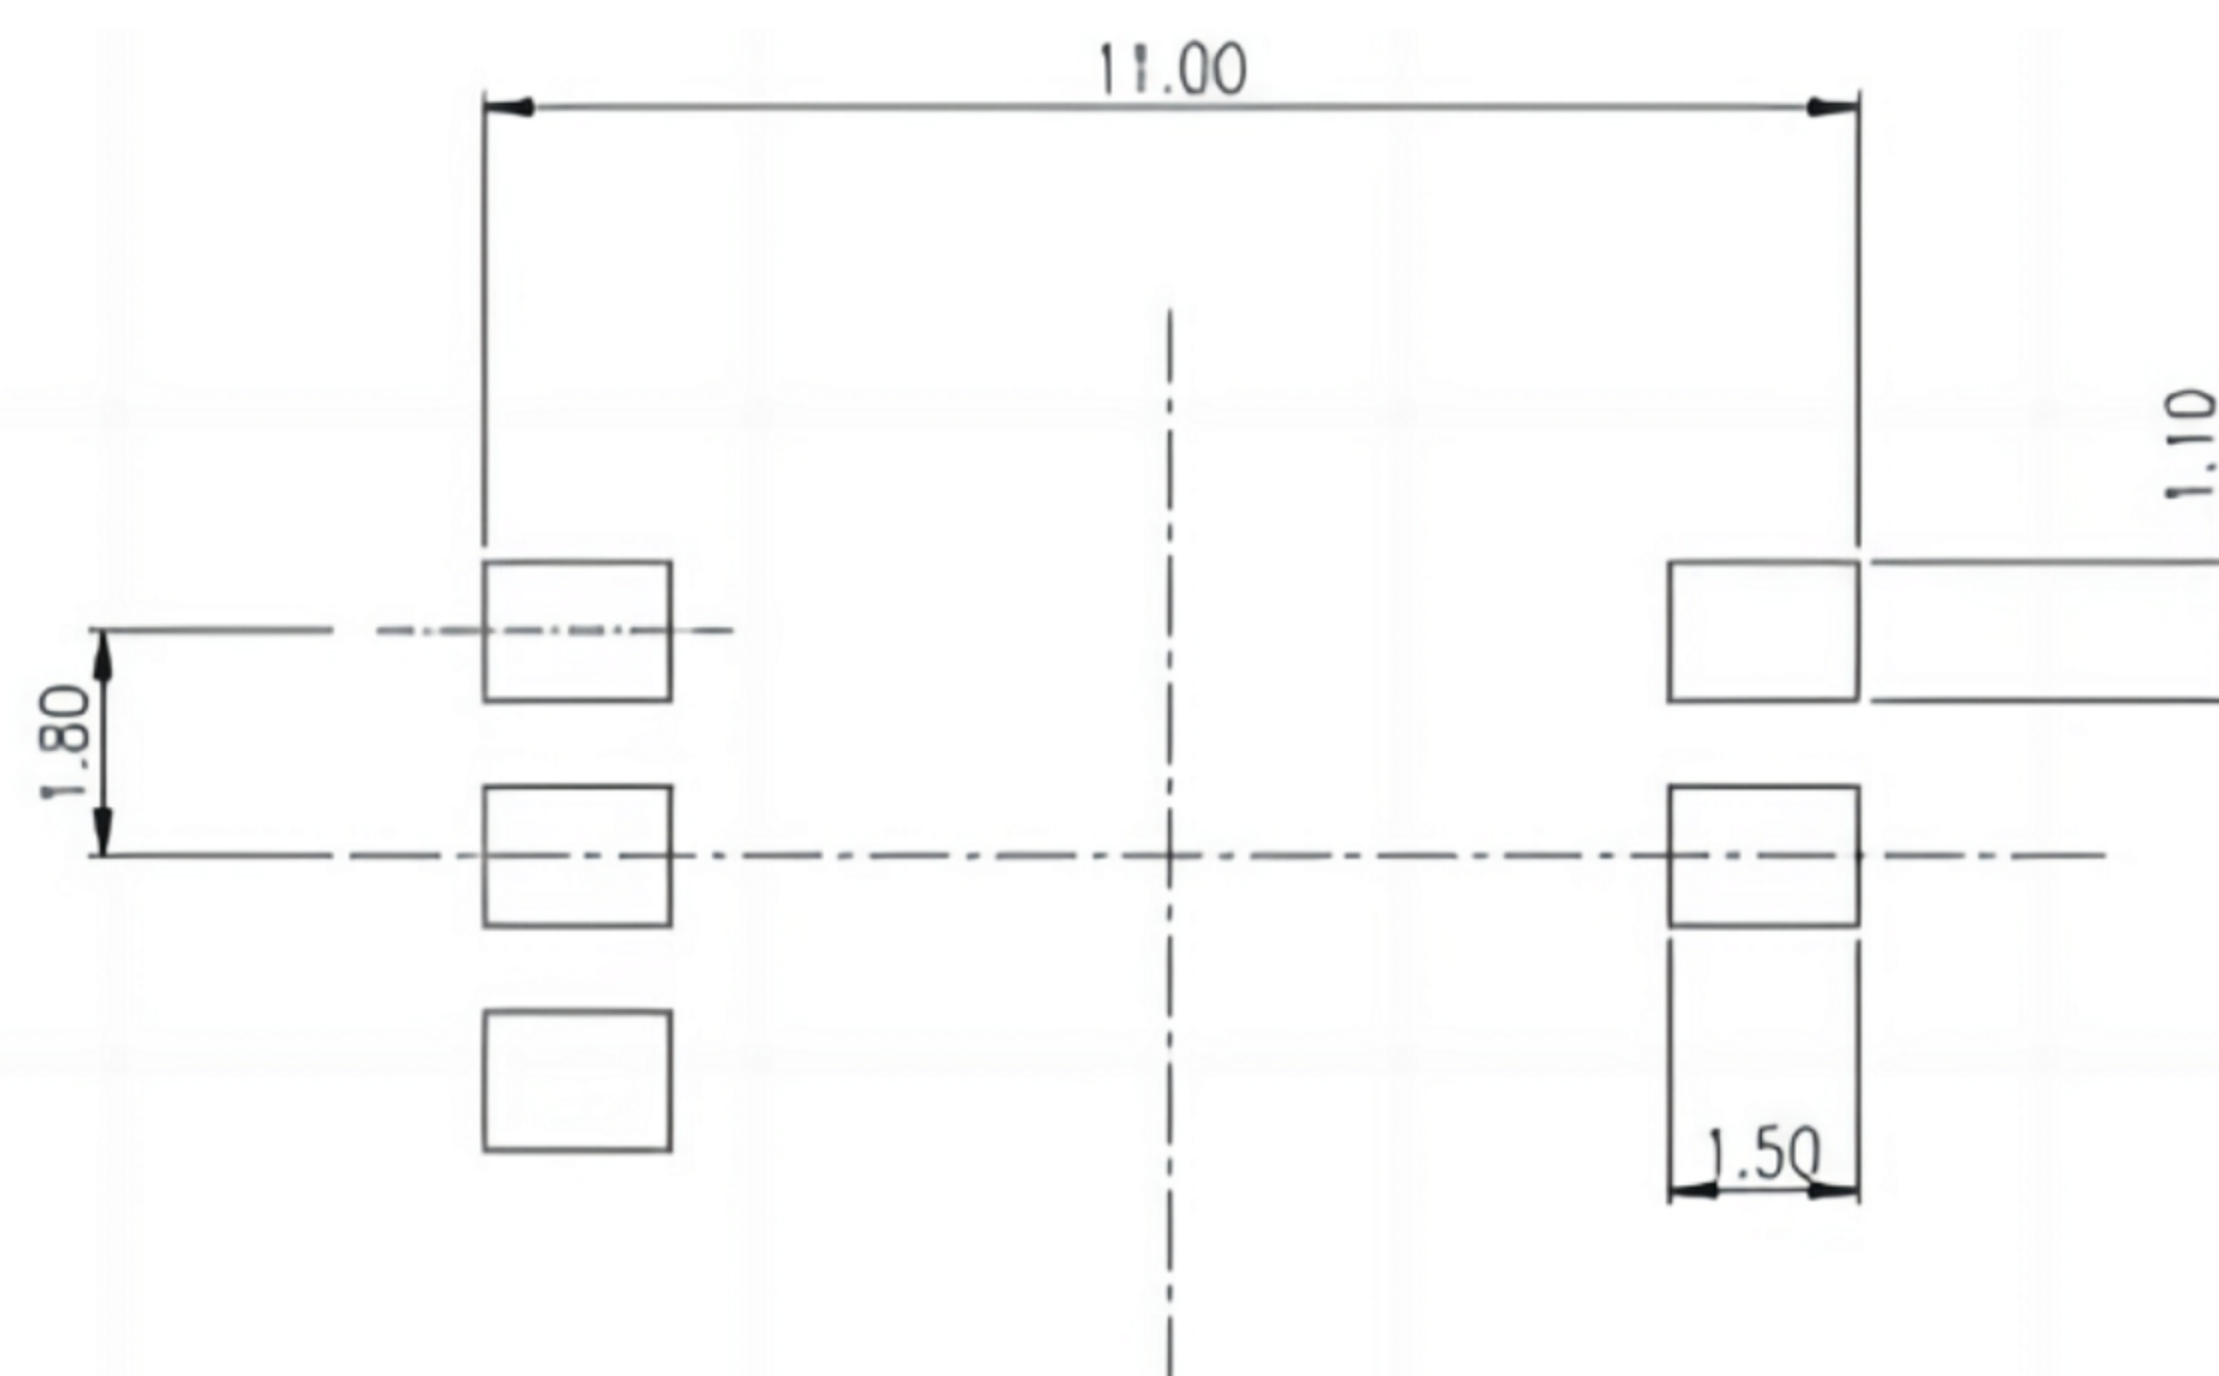
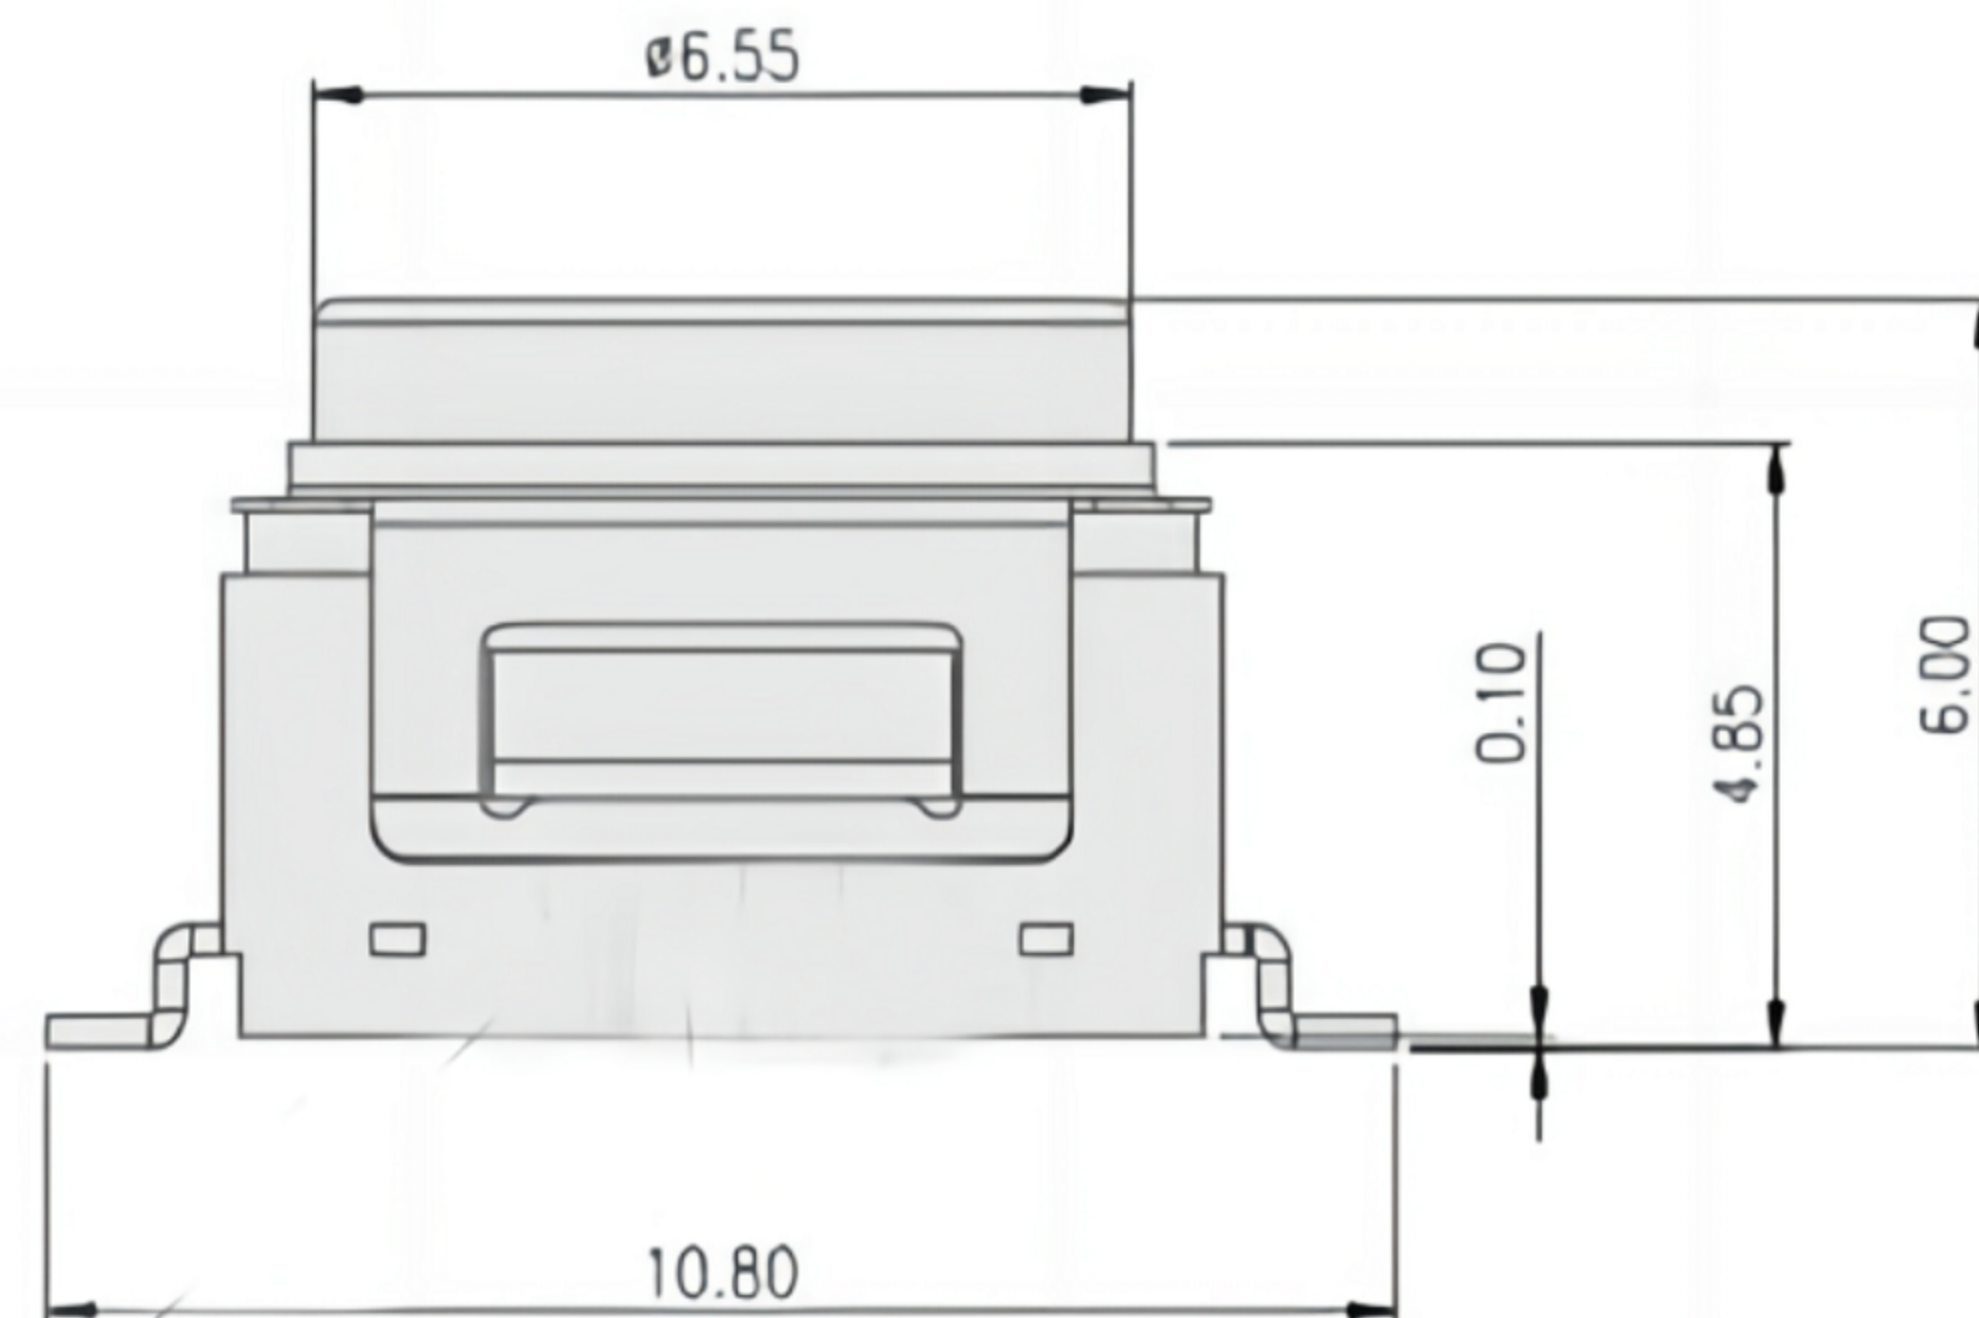
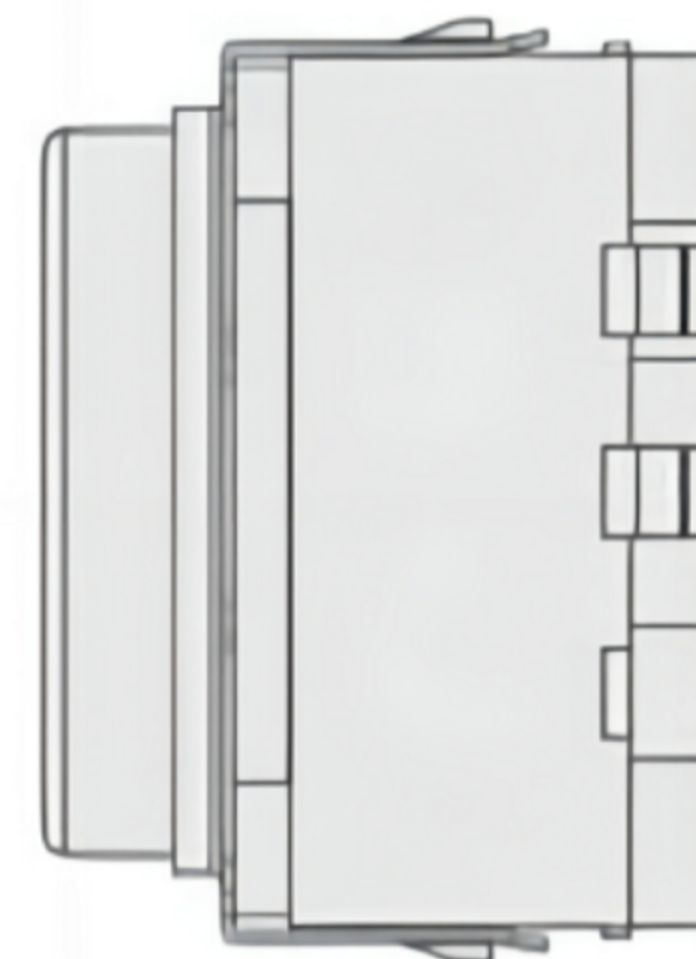



CAD FILE:

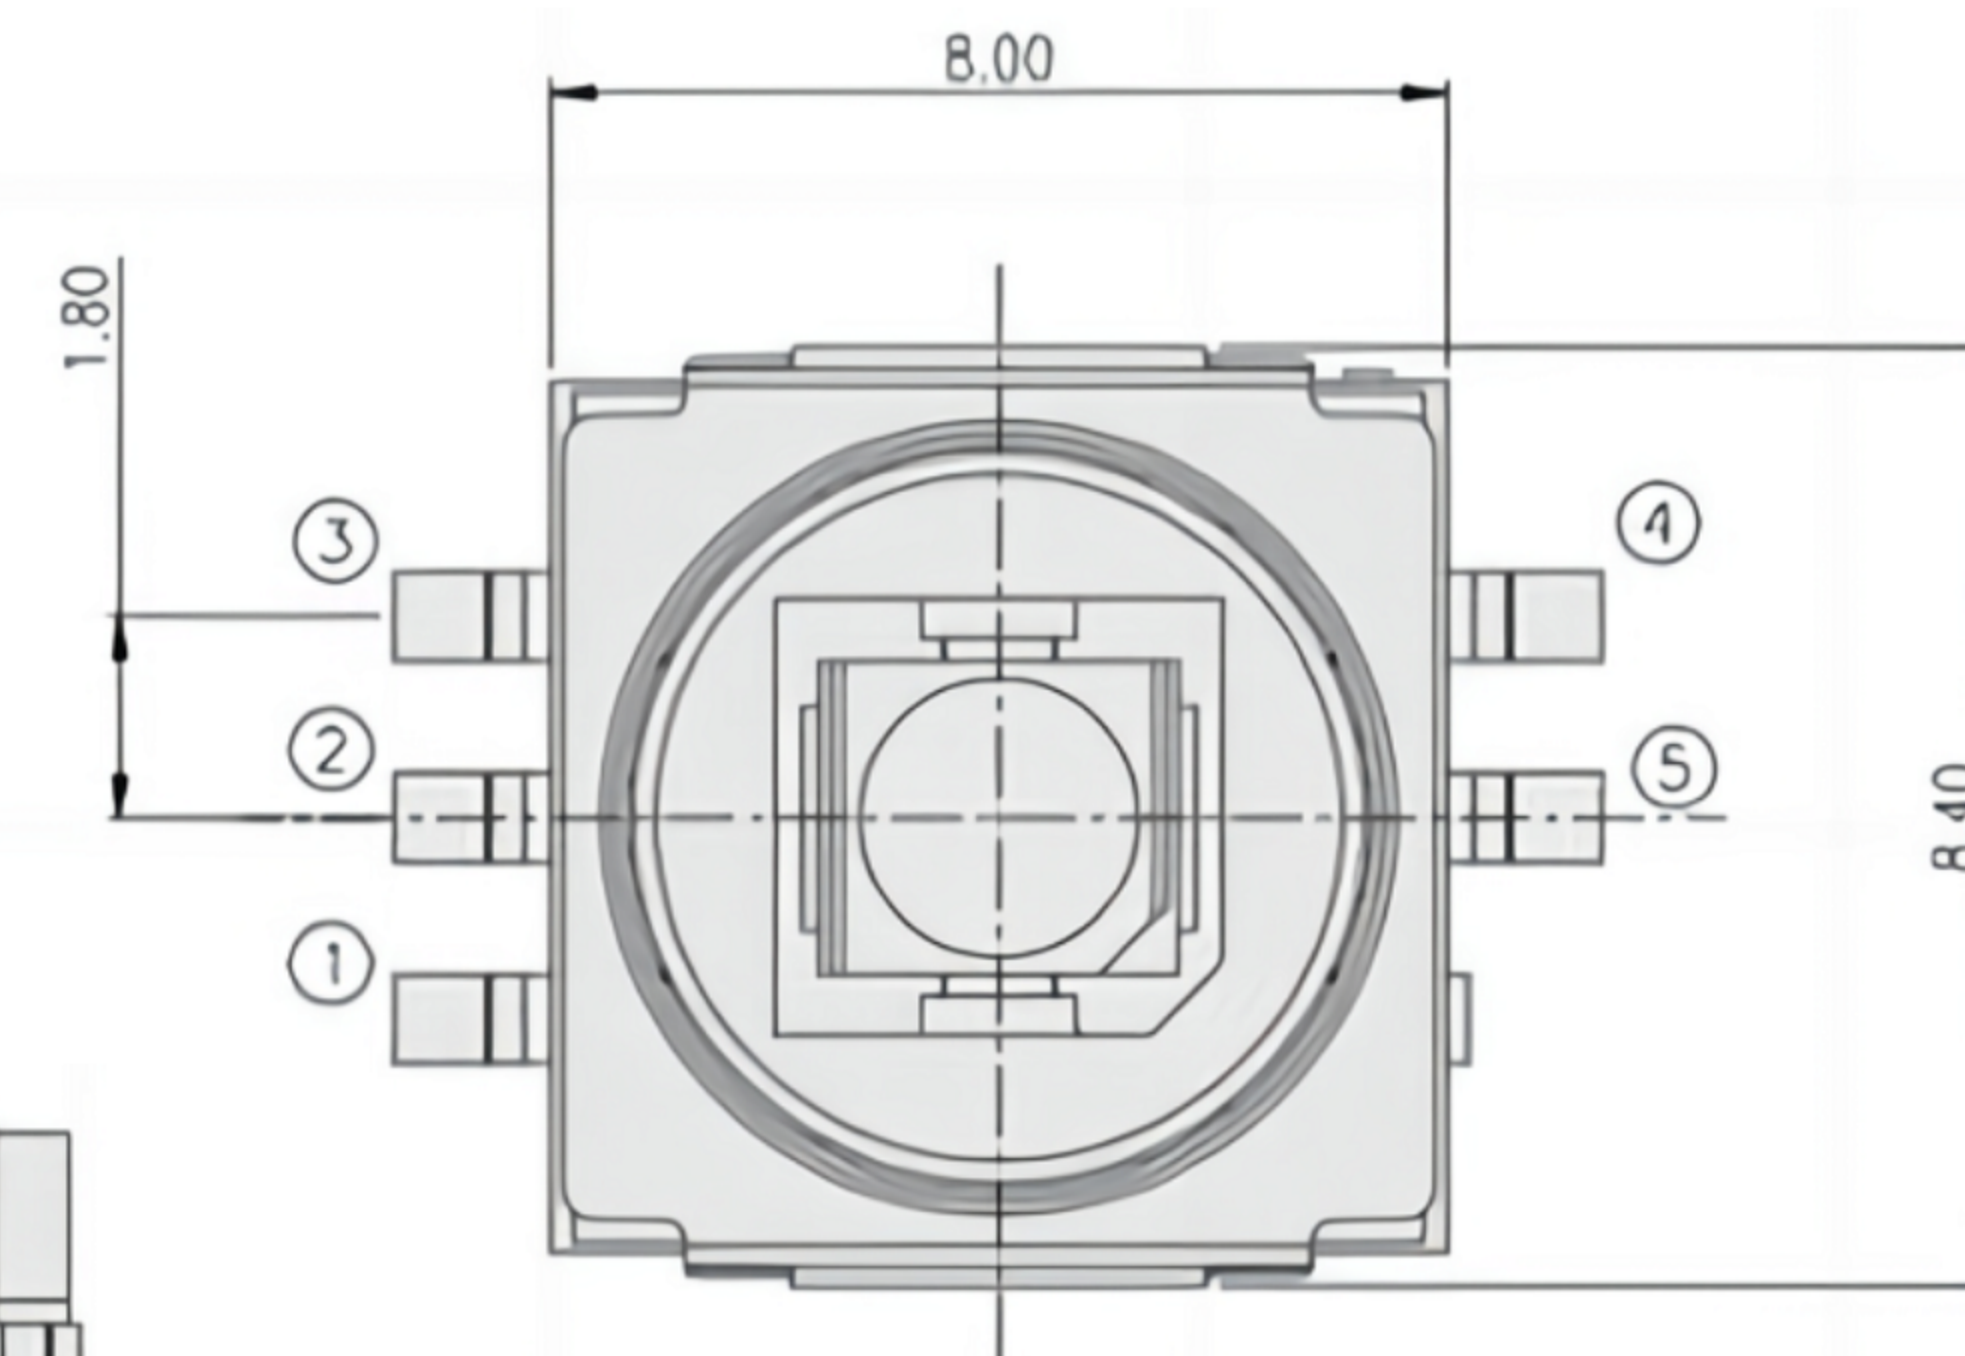

P.C.B. LAYOUT

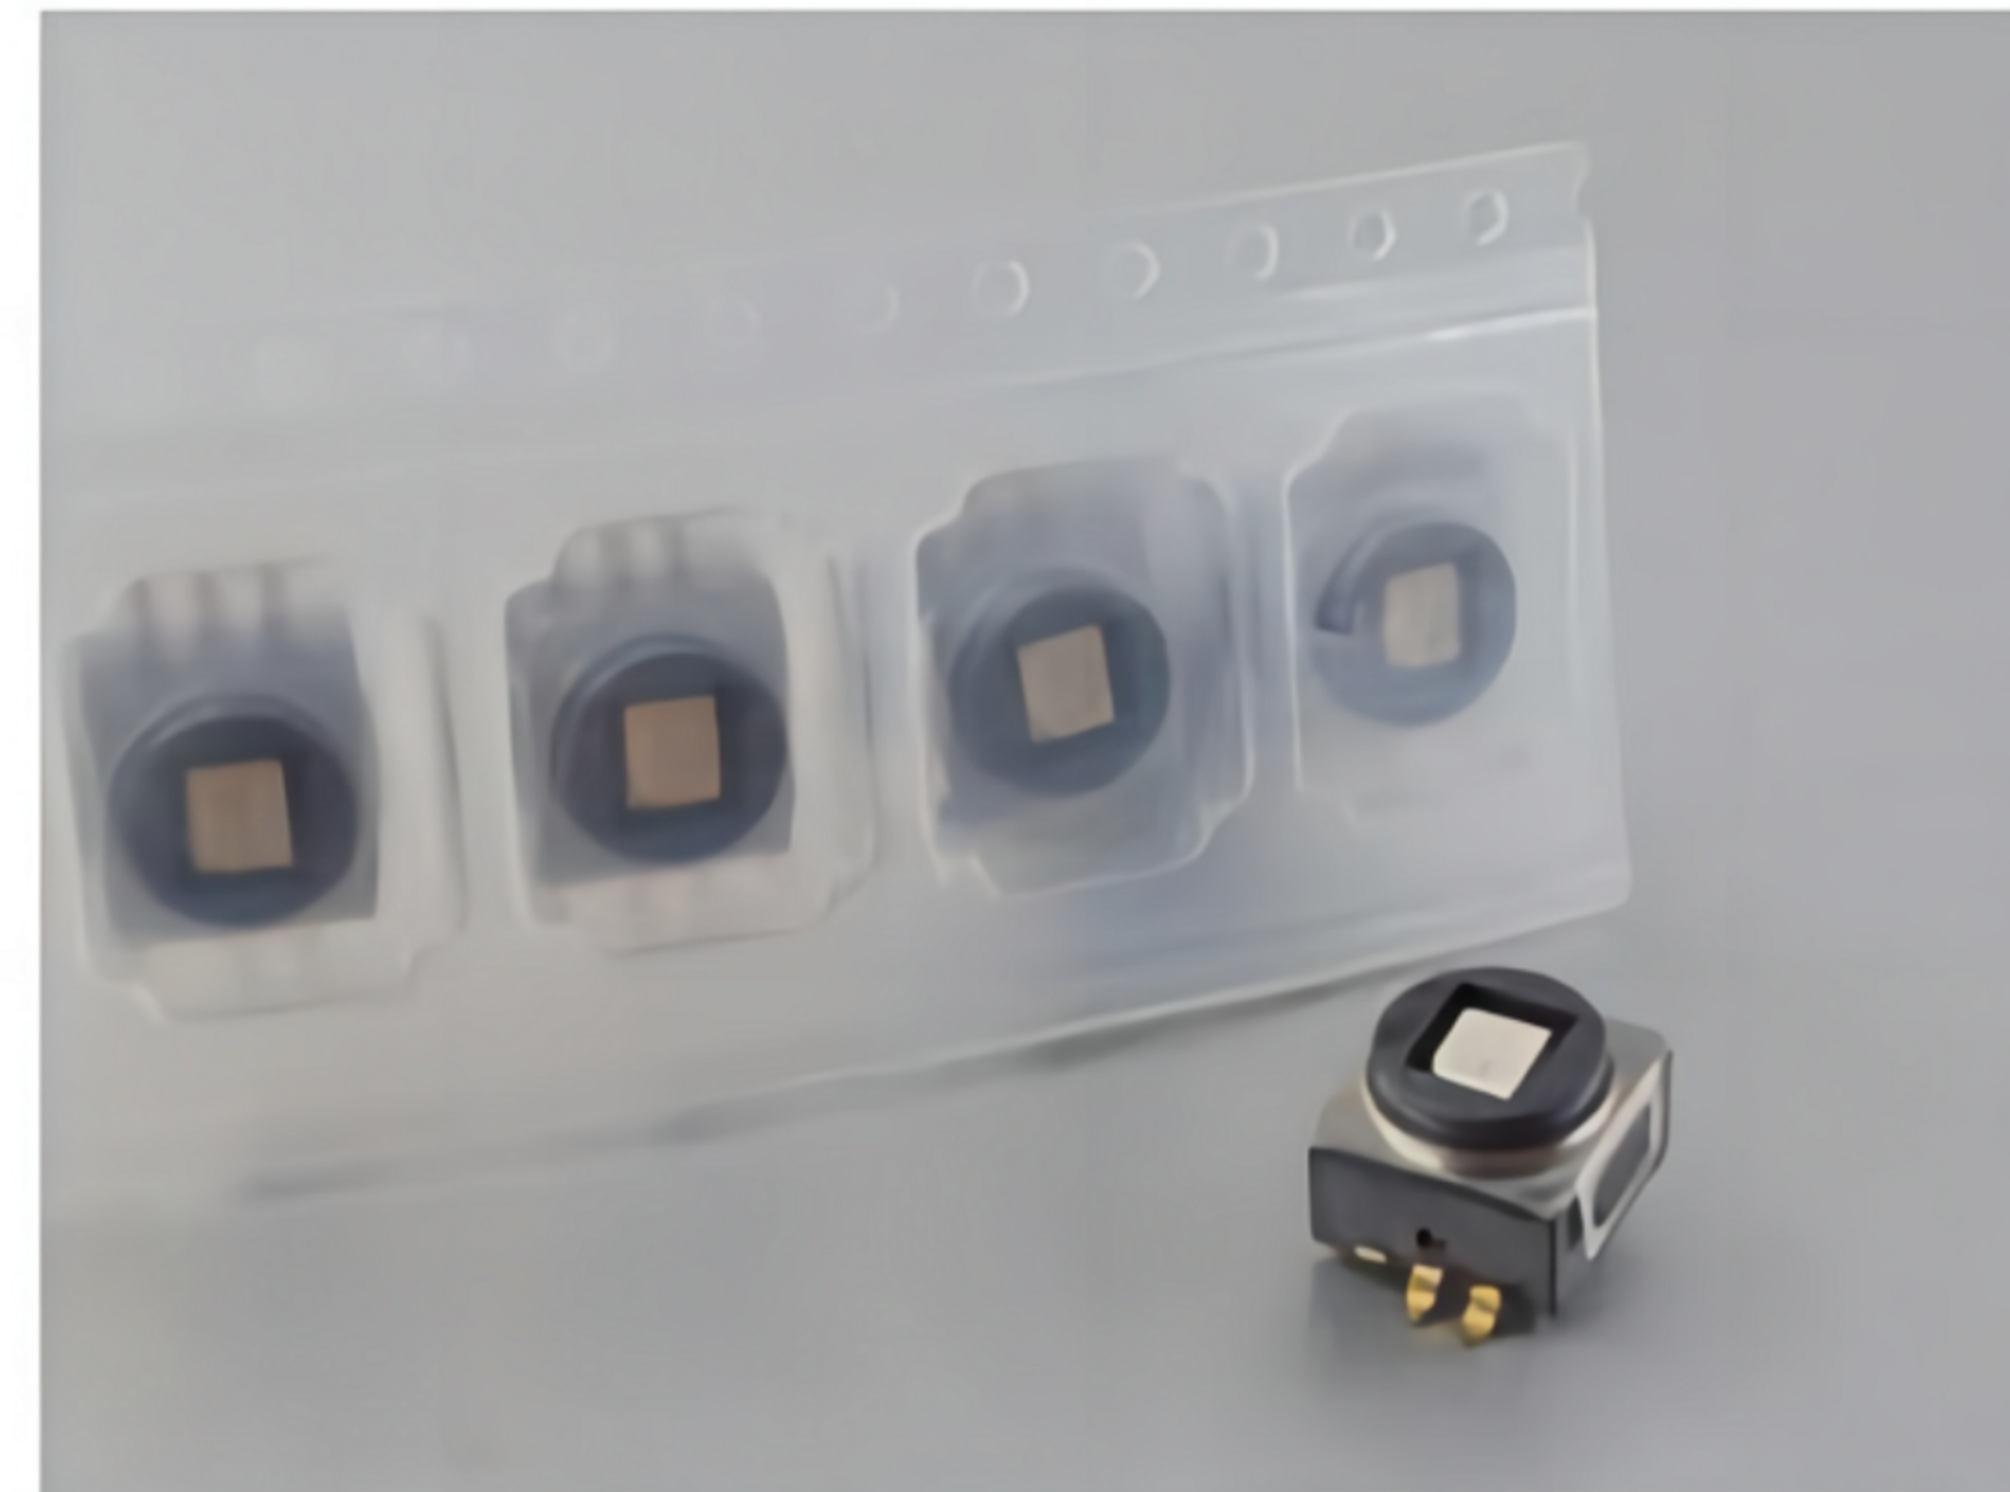

CIRCUIT

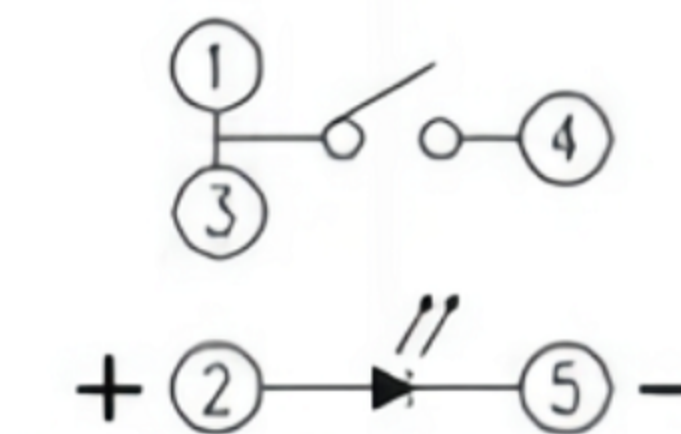

PACKAGE

<Tape & Reel>
650 pcs.

产品规格:

Contact Rating: 50mA, 12V DC
Contact Resistance: 100mΩ max.
Insulation Resistance: 100MΩ min. 100V DC
Dielectric Strength: 250V AC/1 minute
Operating Force: 220±50gf
Travel: 0.25mm
Operating Life: 100,000 cycles
Operating Temp: -25°C ~ +70°C
Storage Temp: -30°C ~ +80°C

应用领域:

Audio / Visual 音响/视听设备
Computer Peripherals 电脑外设
Consumer Electronics 消费类电子
Instrumentation 仪器仪表
Telecommunication 电信, 通信设备
Medical Equipmen 医疗设备

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Light Touch Switch			UNIT : mm	DRWG NO.: XB-TS-LED-1RL-51
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-TS-LED-1RL-51			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONICS CO., LTD.				