
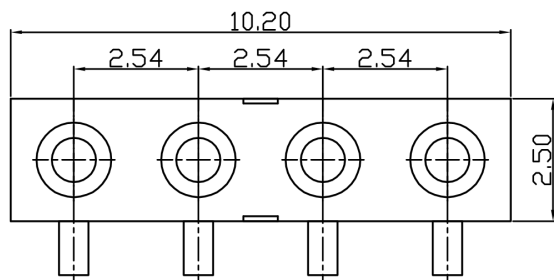
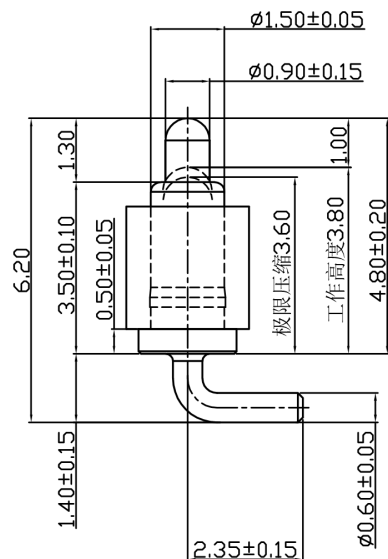


RoHS

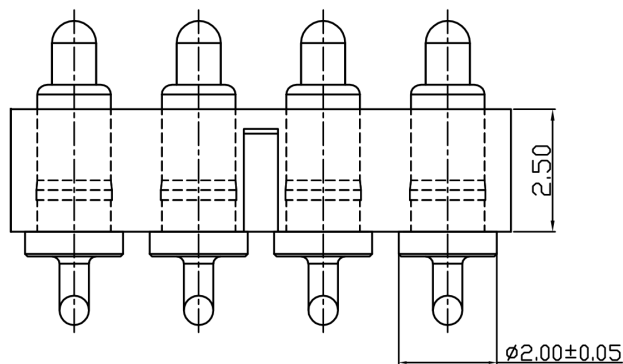

图为焊盘位置和大小

NOTE

- 1.Material
Plunger: Brass
Barrel: Brass
Spring: SUS
Housing: PA46
- 2.Plating
Plunger: Au over NI
Barrel: Au over NI
- 3.Electrical
Rated current & voltage: DC 12V; 2.0A Max.
- 4.Mechanical
Spring force: $60g \pm 20\%$ at normal working height
Durability: 10,000 cycles(minimum)
- 5.To ensure the best usage, please operate it based on the working height Based on the engineering drawings, shall not exceed the maximum allowed compression
- 6.To avoid arcing issue, The adaptor start to power supply after connector mated fully.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS




MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 04/01/21

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	POGO PIN
SCALE	1 : 1	DWG NO.	XB-PGC-W-254-4P-G
SHEET NO.	1 of 1	PART NO.	Thimble Connector

SIZE
A4
VER
R

RoHS

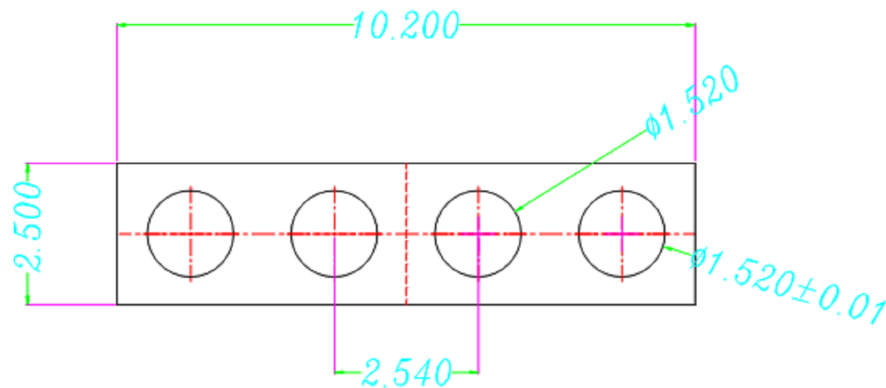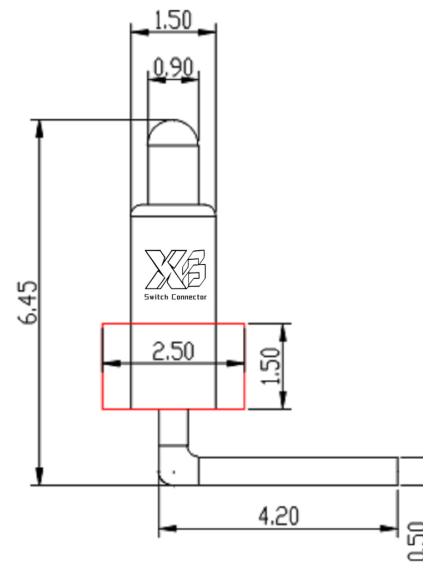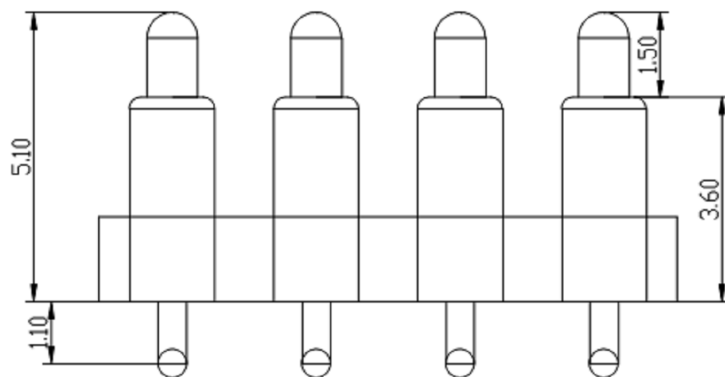

NOTE

- 1.Material
Plunger: Brass
Barrel: Brass
Spring: SUS
Housing: PA46
- 2.Plating
Plunger: Au over NI
Barrel: Au over NI
- 3.Electrical
Rated current & voltage: DC 12V; 2.0A Max.
- 4.Mechanical
Spring force: $60g \pm 20\%$ at normal working height
Durability: 10,000 cycles(minimum)
- 5.To ensure the best usage, please operate it based on the working height Based on the engineering drawings, shall not exceed the maximum allowed compression
- 6.To avoid arcing issue, The adaptor start to power supply after connector mated fully.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM



DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 04/01/21
DATE: 04/01/21
DATE: 04/01/21


MAT'L		TITLE	CONNECTOR
FINISH		MODLE	POGO PIN
SCALE	1 : 1	DWG NO.	XB-PGC-W-254-4P-G
SHEET NO.	1 of 1	PART NO.	Thimble Connector

SIZE
A4
VER
R

RoHS

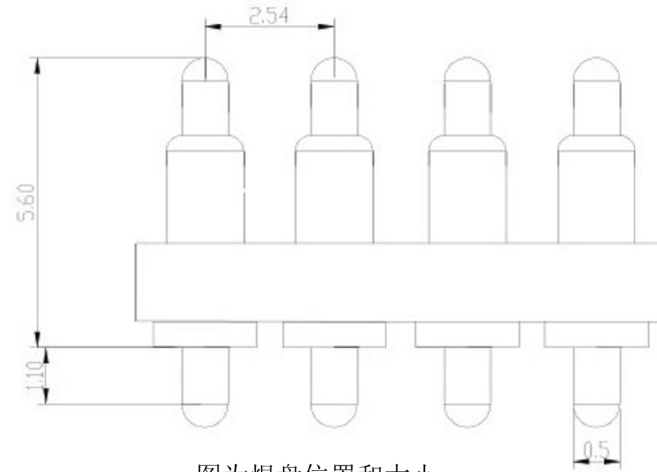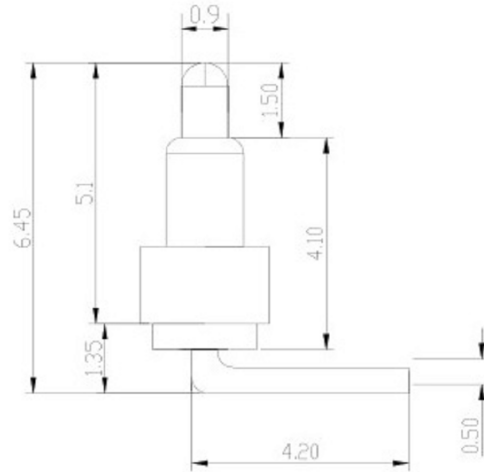

图为焊盘位置和大小

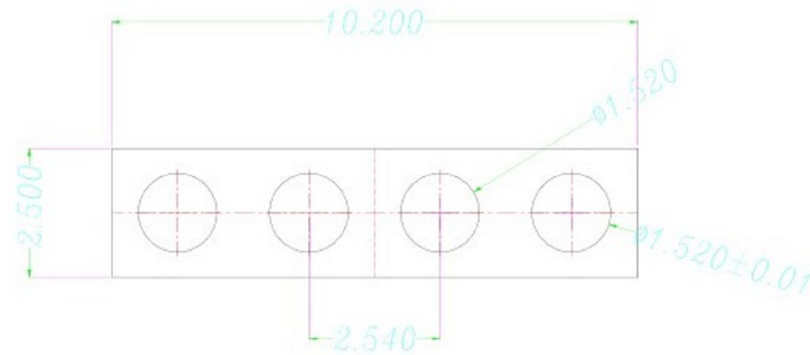

NOTE

1.Material

Plunger: Brass

Barrel: Brass

Spring: SUS

Housing: PA46

2.Plating

Plunger: Au over NI

Barrel: Au over NI

3.Electrical

Rated current & voltage: DC 12V; 2.0A Max.

4.Mechanical

Spring force: $60g \pm 20\%$ at normal working height

Durability: 10,000 cycles(minimum)

5.To ensure the best usage,please operate it based on the working height Based on the engineering drawings,shall not exceed the maximum allowed compression

6.To avoid arcing issue, The adaptor start to power supply after connector mated fully.



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

Switch Connector

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

04/01/21

CHECKED BY:

Jacky Chen

DATE

04/01/21

APPROVED BY:

Tony Kao

DATE

04/01/21

MAT'L

FINISH

SCALE

1 : 1

SHEET NO.

1 of 1

TITLE

CONNECTOR

MODLE

DWG NO.

PART NO.

SIZE

A4

VER

R