





SCHEMATIC

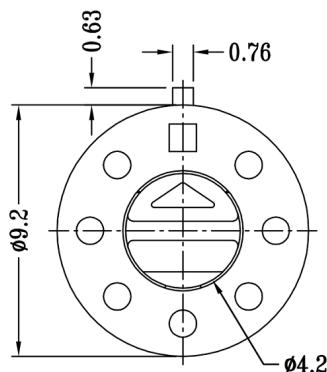

MODEL NO.	TRAVEL	NUMBER OF POSITIONS
XB-RS-0C1-D	45°	OFF ①
XB-RS-0C2-D	90°	OFF ①, ②
XB-RS-0C3-D	135°	OFF ①, ②, ③
XB-RS-0C4-D	180°	OFF ①, ②, ③, ④
XB-RS-0C5-D	225°	OFF ①, ②, ③, ④, ⑤
XB-RS-0C6-D	270°	OFF ①, ②, ③, ④, ⑤, ⑥
XB-RS-0C7-D	315°	OFF ①, ②, ③, ④, ⑤, ⑥, ⑦
XB-RS-0C8-D	360°	OFF ①, ②, ③, ④, ⑤, ⑥, ⑦, ⑧



P.C.B LAYOUT BOTTOM VIEW

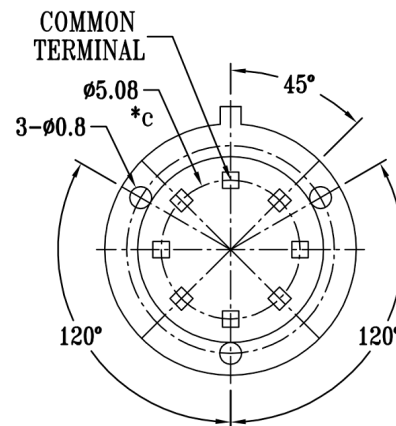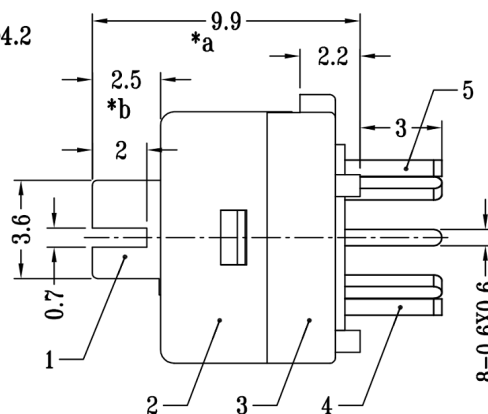

ELECTRICAL RATING: 0.5A 24V DC ; 0.2A 48V DC
CONTACT RESISTANCE: 100mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN. 500V DC
DIELECTRIC STRENGHT: 500V AC FOR 1 MINUTE
OPERATING FORCE: 300±150gf
OPERATING LIFE: 10000 cycles
OPERATING TEMPERATURE RANGE: -20°C ~ +70°C

注：“*”表示关键尺寸（3个）。

8				TOLERANCE UNLESS SPECIFIED						
7										
6				WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版			ZENQ. CHEN
5				OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Rotary Switch			UNIT : mm	DRWG NO.: XB-RS-0C1-C8	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-RS-0C1-C8			SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED						2012-9-25
1	KNOB	PPA	1	BLACK	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH				APPD.	ZENQ. CHEN	2012-9-25