



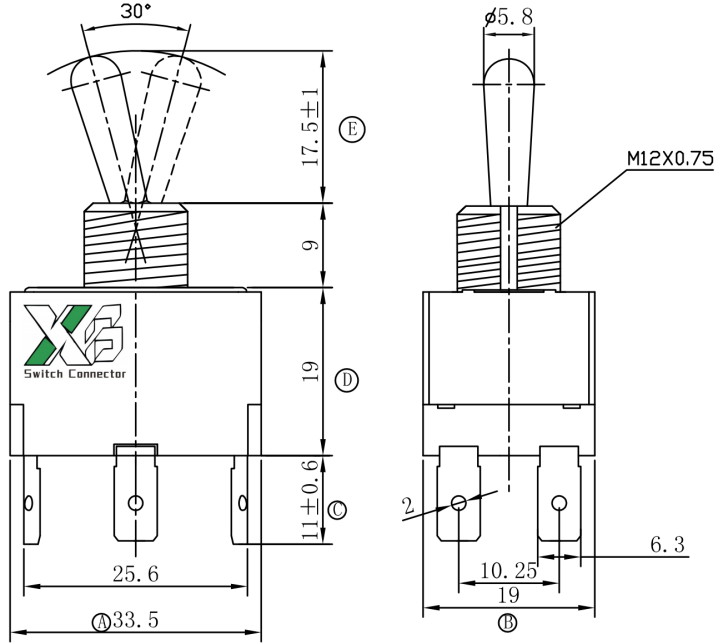



Technical characteristics

SPECIFICATION:15 A max. @ 125 VAC.
10 A max. @ 250 VAC.
MECHANICAL LIFE:40,000 make-and-break cycles.
CONTACT RESISTANCE:50mΩ max.initial @2-4VDC
100mA for both silver.
INSULATION RESISTANCE: 1000 MΩ min.
DIELECTRIC STRENGTH: 1500 VAC min.
OPERATING TEMPERATURE: -30°C to +85°C.


安装尺寸 (Mounting)




电路图 (Circuitry)

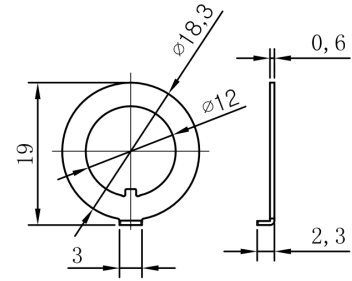

配件：卡扣定位垫片



配件：菊花介
t=1.6mm



配件：六角螺母
t=2mm

注：①~④ 为重点检测尺寸

Materials

CASE: PF (UL 94V-0)
HOUSING: SPCC.
ACTUATOR: Alloy,nickel plated.
BUSHING: Alloy,nickel plated.
CONTACT/TERMINALS: Copper alloy silver plated.
RoHS

此图纸仅供参考，实际尺寸以实物为准！



公差 TOLERANCES				.X± 0.5	.XX± 0.25	角度 ± 5°		UNIT 单位 mm	SCALE 1:1	≡	⊙
版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2023. 7. 22	TITLE 图名	TOGGLE SWITCH	DWG NO. 料号			
变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	核准 APPROVED BY	核对 CHECKED BY	绘图 DRAWN BY	黄泳何	PART NO. 型号	KN3 (B) -203-AP-M-RS			