
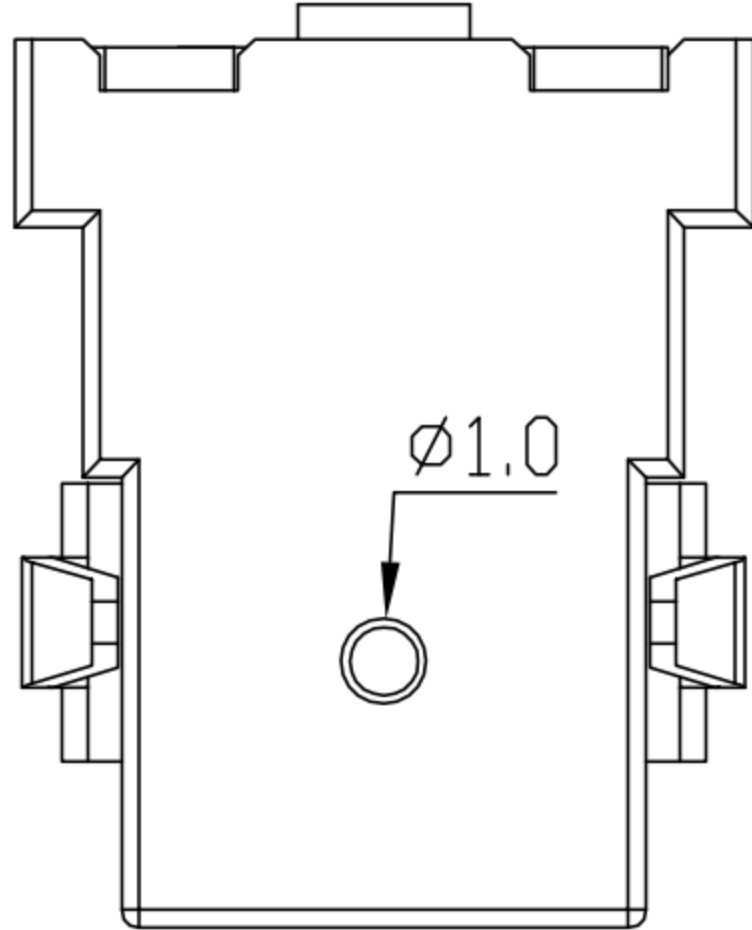





CAD FILE:

ROHS

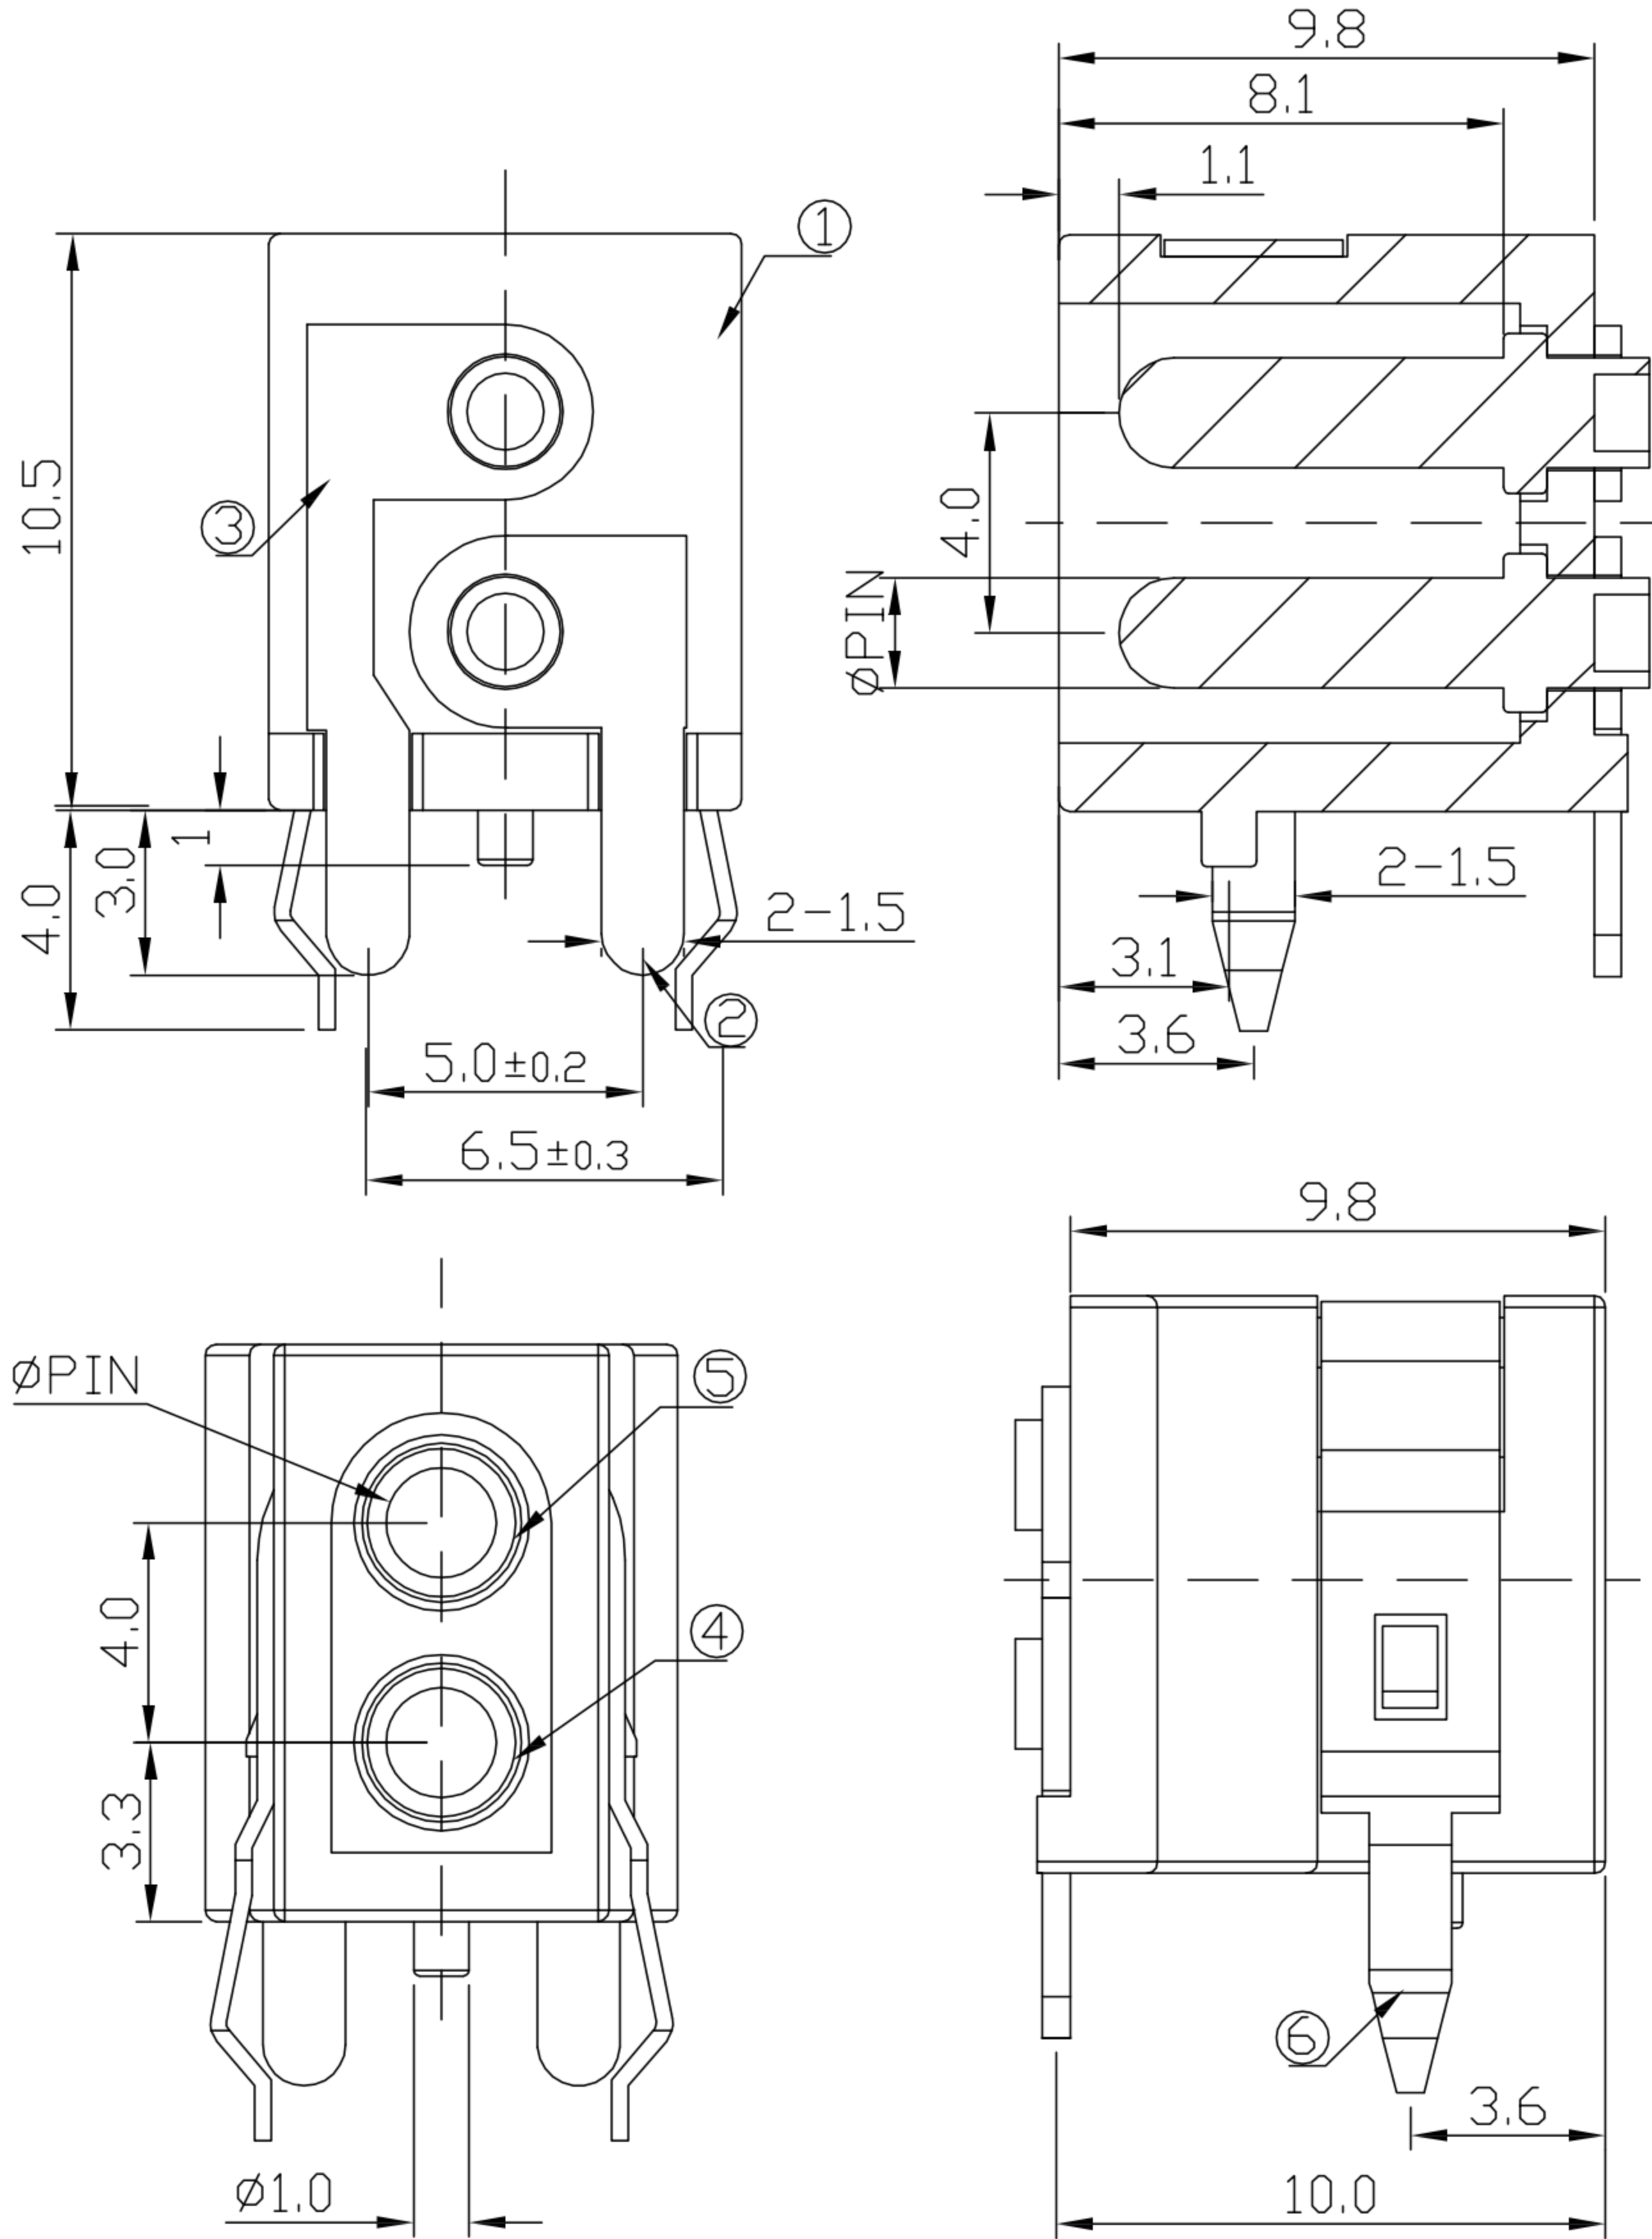

- SPECIFICATION
- 1.Rating : DC 30V 5A;
 - 2.Contact resistance: $\leq 0.03\Omega$;
 - 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
 - 4.Withstand voltage: 500VAC ;
 - 5.Insertion and extraction force: 3–20N;
 - 6.life test: 5,000 cycles.

SCHEMATIC

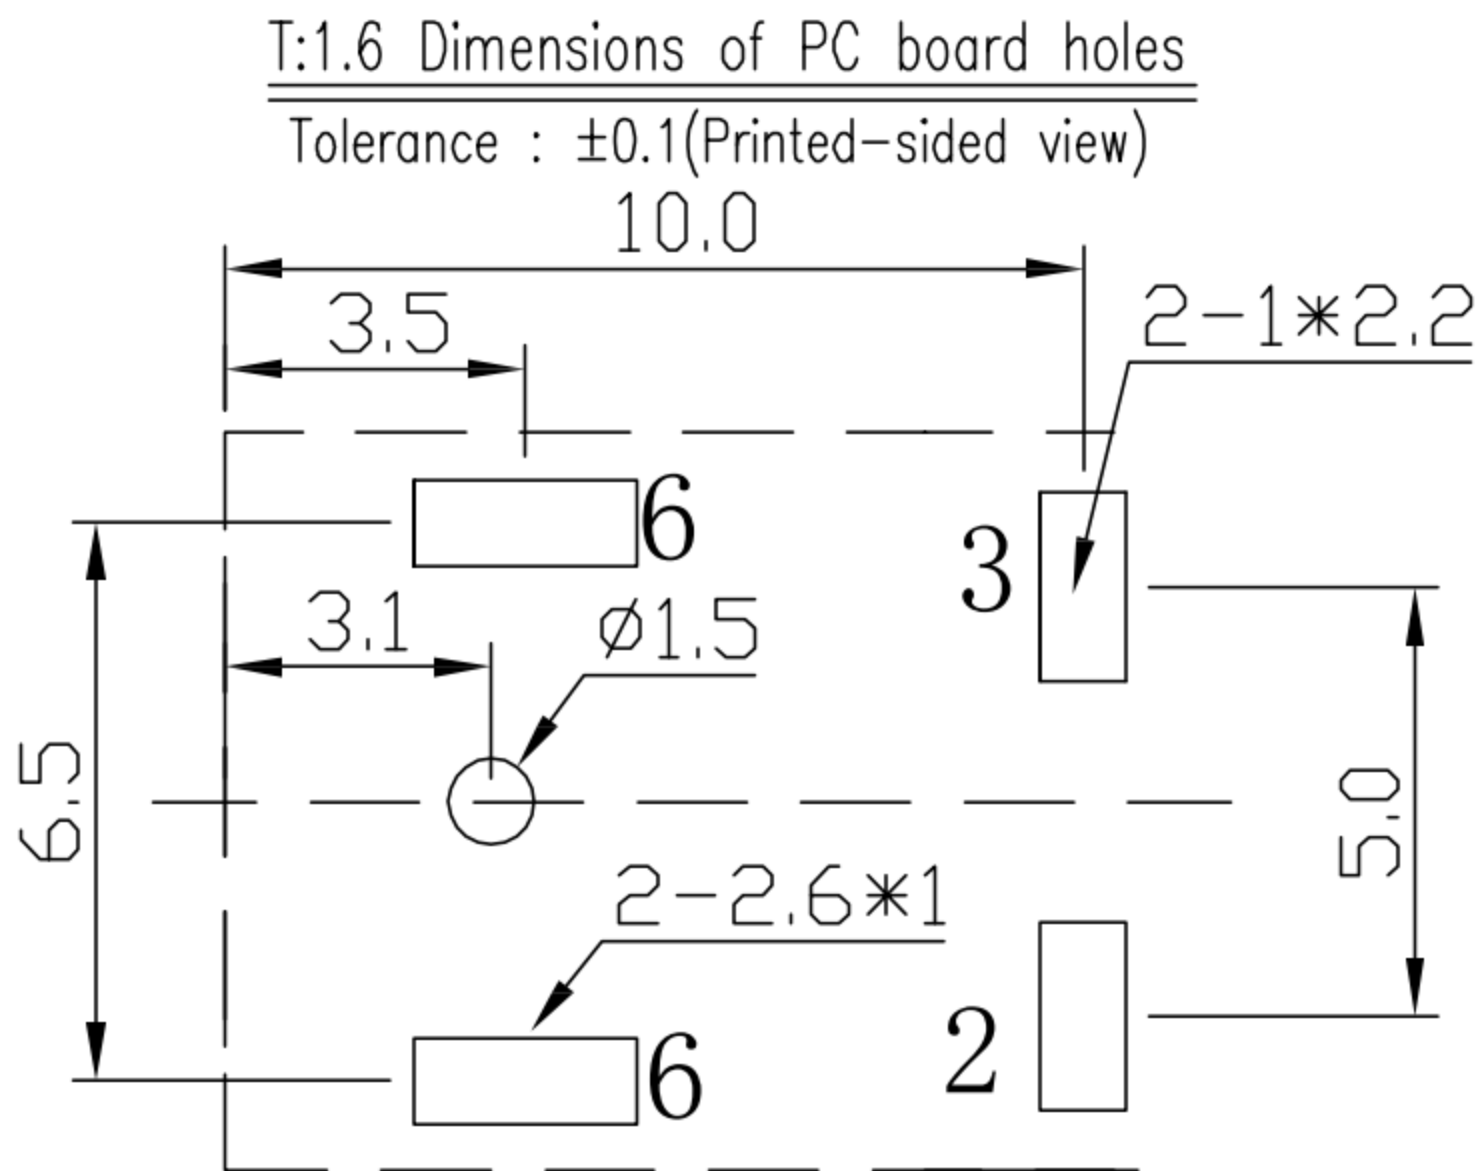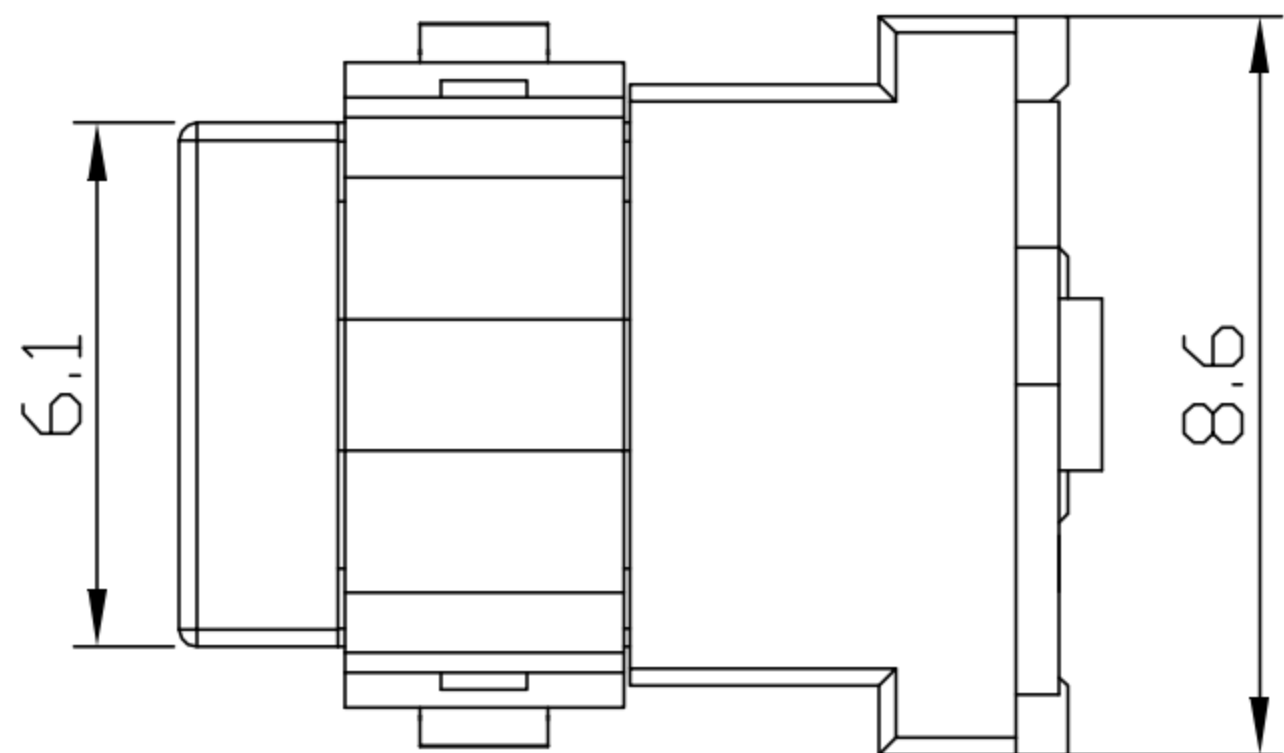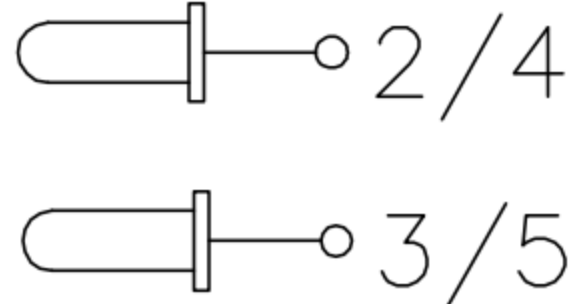

PIN	φ 2.1	φ 2.5
APPD		

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	WITHIN 1.5mm : ± 0.1 mm OVER 1.5mm : ± 0.2 mm	A ISSUE	2012-9-25 DATE	初 版 DESCRIPTIONS OF REVISION	ZENQ. CHEN APPD.
8										
7										
6										
5										
4	CONTACT	SUS	1	Ag CLAD						
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED						
2	COVER	STEEL STRIP	1	Ni PLATED						
1	KNOB	PPA	1	BLACK						
					TITLE : DC Power Jack		UNIT : mm		DRWG NO.:DC-201	
					MODEL:		SCALE: 5:1		DWN. JUN. YANG	2012-9-25
					X3 东莞市溪榜电子有限公司		CHK'D DONG. PANG		2012-9-25	
					Switch Connector DONG GUAN XI BANG ELECTRONI CS CO., LTD.		APPD. ZENQ. CHEN		2012-9-25	