
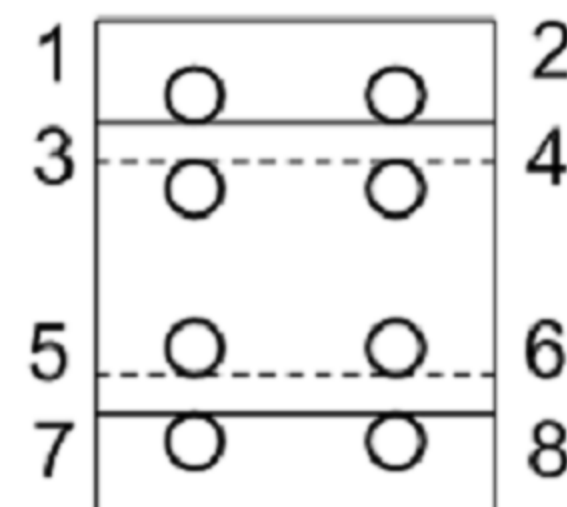
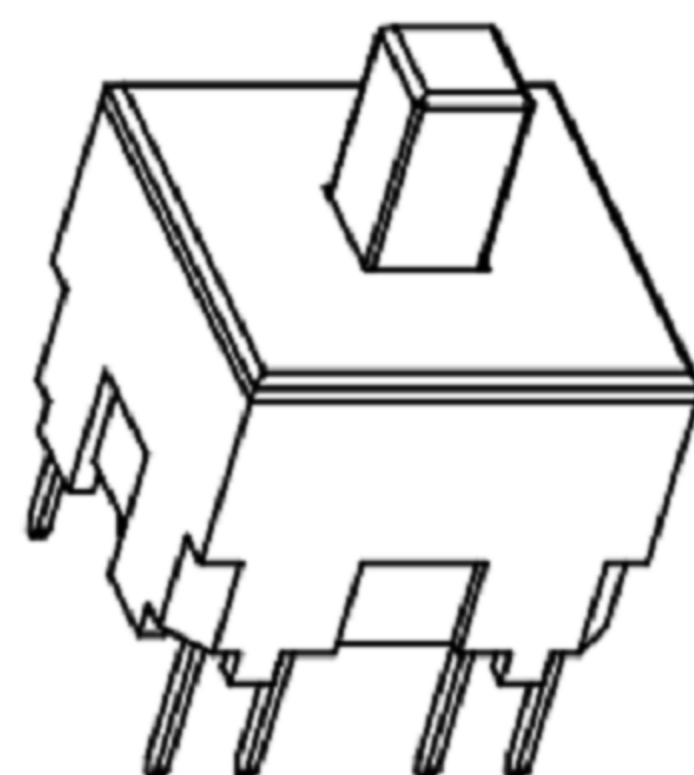
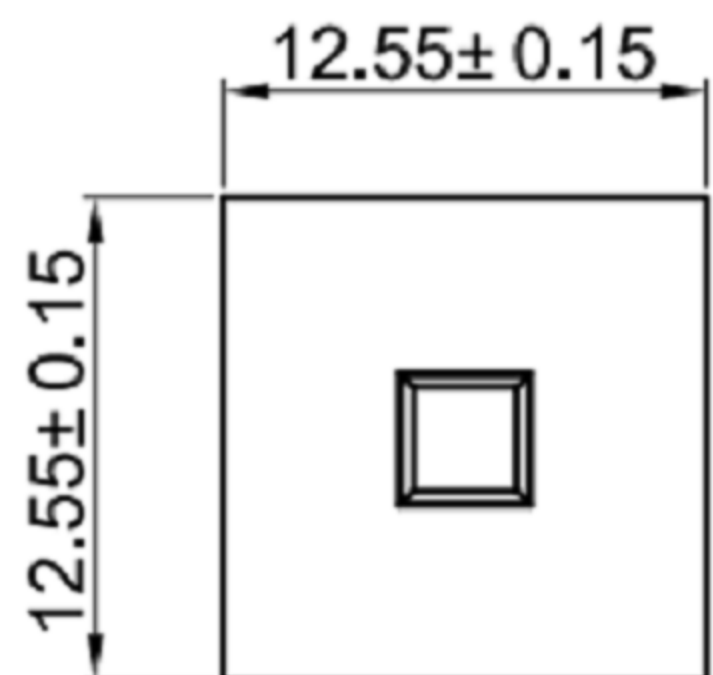




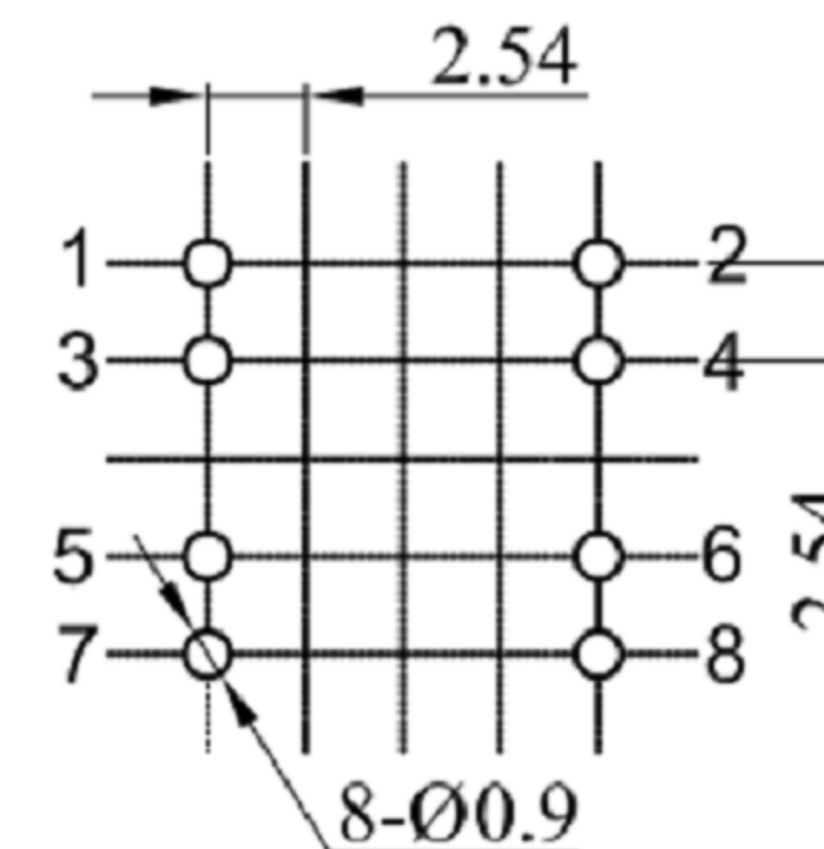


CAD FILE:

ROHS

----- down
—— upMomentary
Circuit Diagram

PCB HOLE

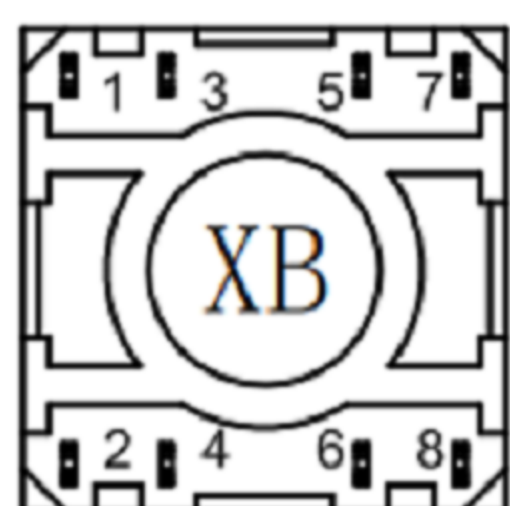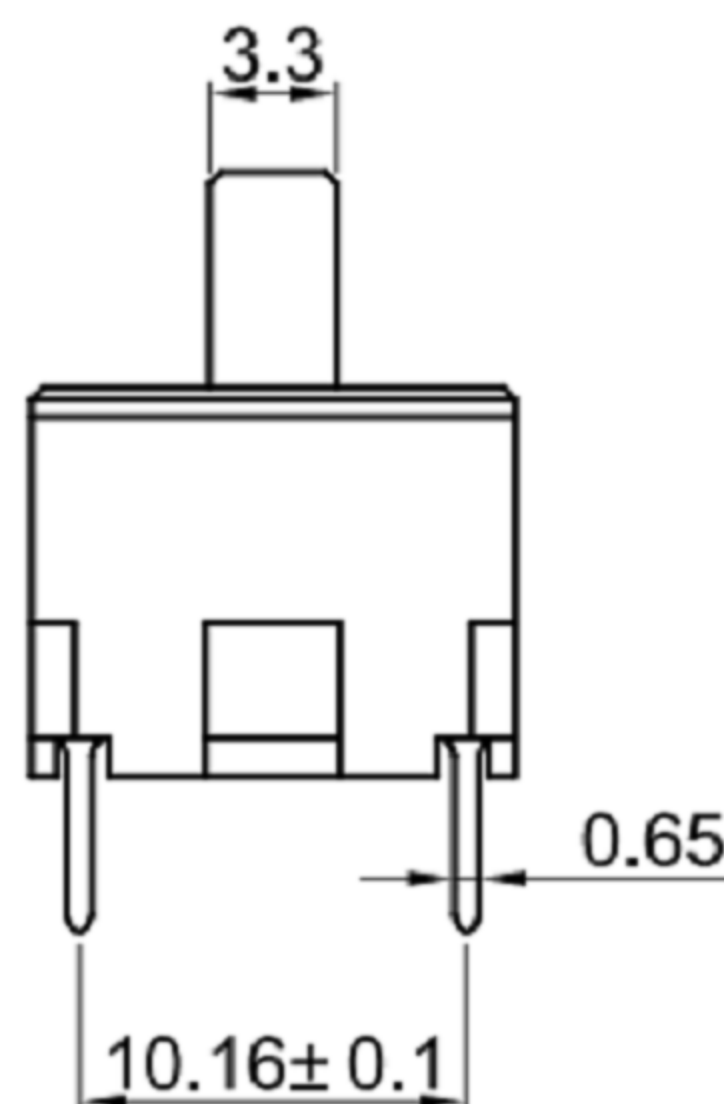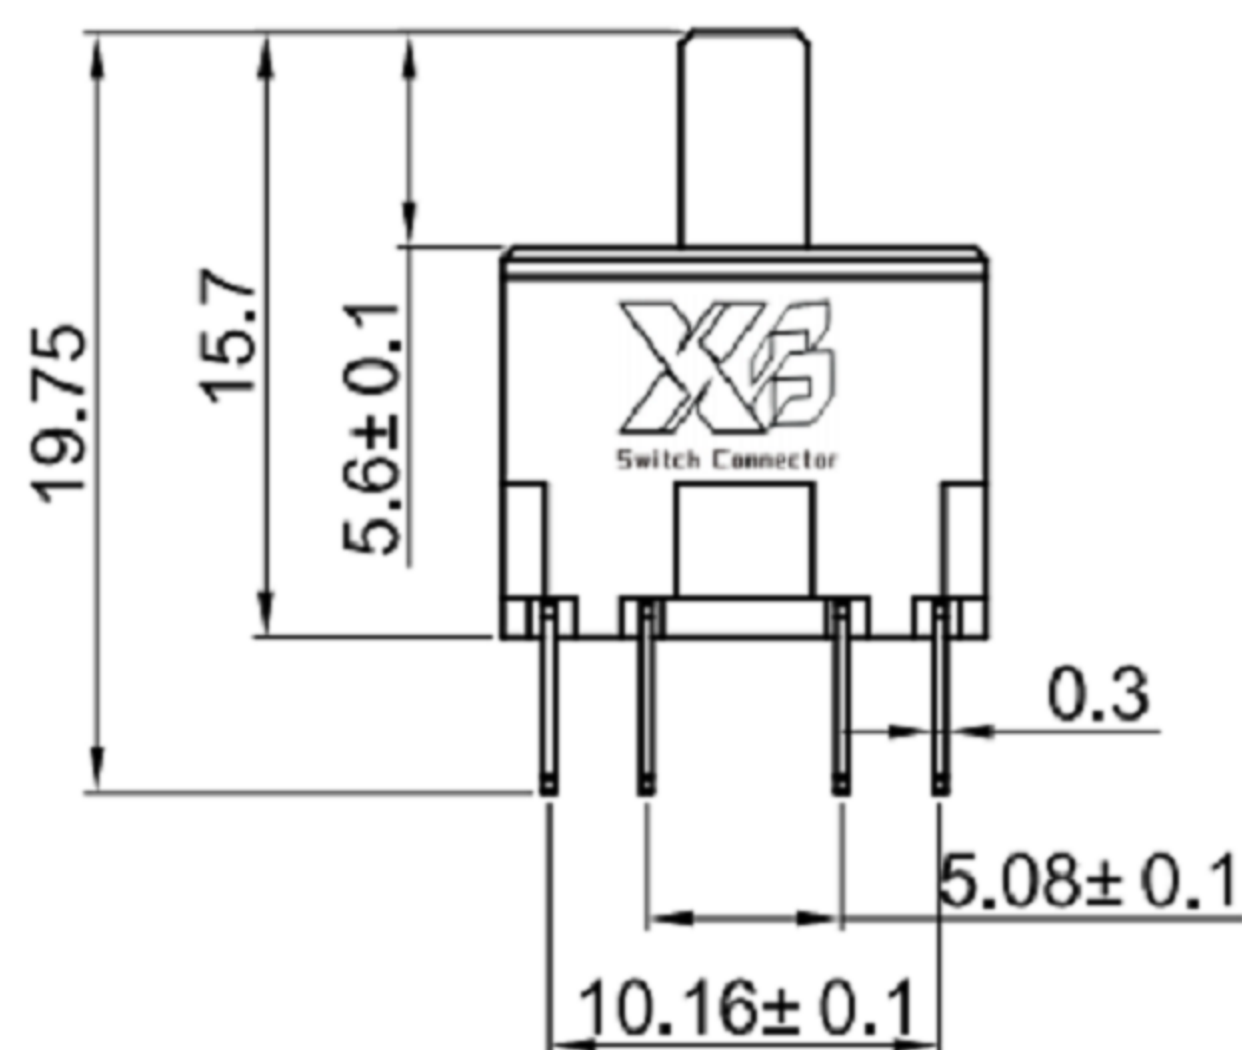

Rating: Min. 0.5uA
Max. 250mA/120V/9W AC/6W DC
Contact Resistance: 100mΩ Max
Insulation Resistance: 10MΩ Min
Dielectric Strength: AC 1000V for 2 minute
Total travel: 1.8±0.4mm
Operating Force: 250±50gf
Mechanical Life: Over 500,000 cycles
Electrial Life: Over 100,000 cycles
Operating Temperation: -40° C~160° C
MATERIAL:

Base: LCP;
Actuator: LCP;
Terminal: Phosphor bronze, Gold plated.

Temperature and duration of dipping:
Wave: Max 260° C for Max 10 seconds.
270° C for Max 5 seconds.
Soldering iron: Max 350° C for Max 3 seconds.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Push Switch			UNIT : mm	DRWG NO.: XB-PB-K-07A
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-PB-K-07A			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					