

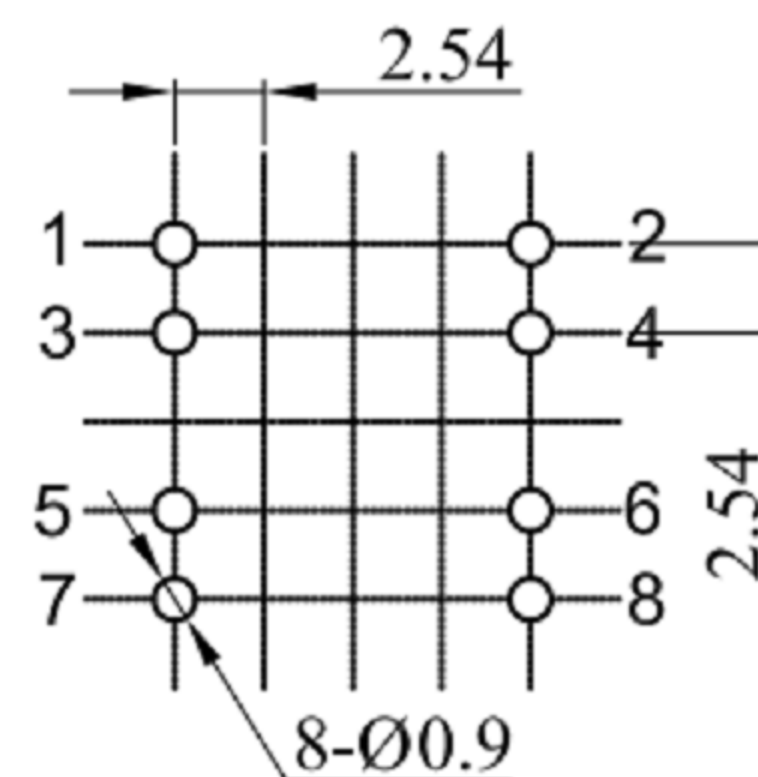
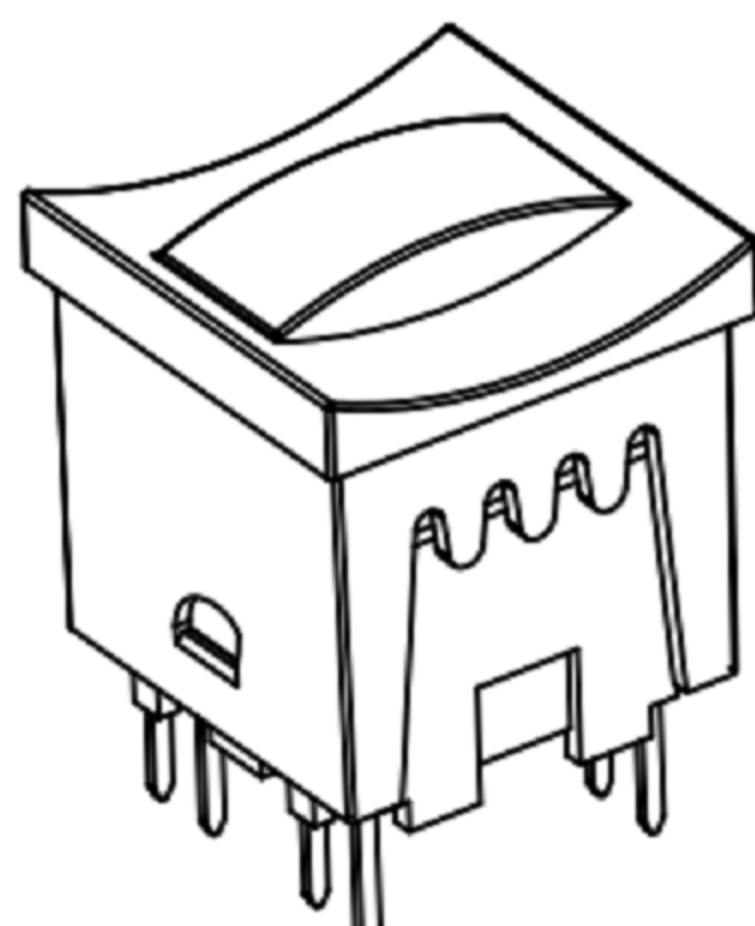


CAD FILE:

ROHS


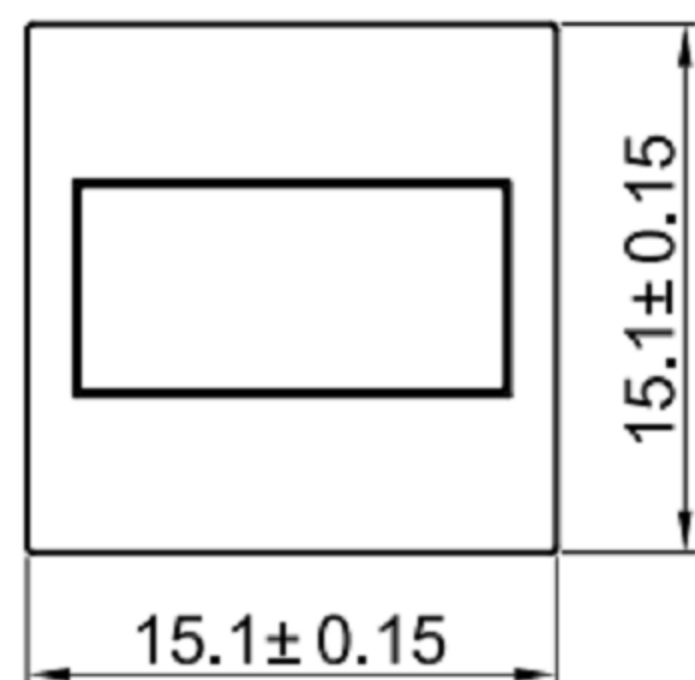


PCB HOLE

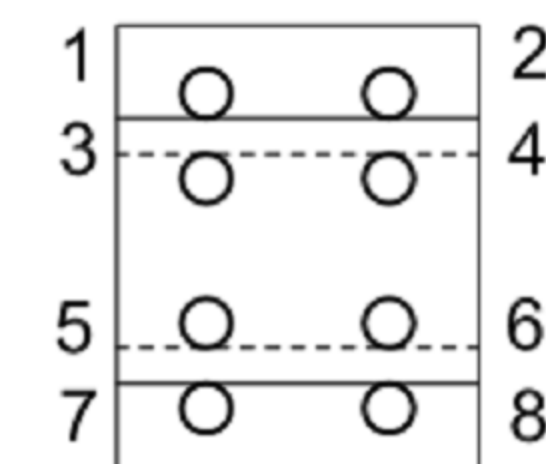


--- down
— up

Momentary
Circuit Diagram

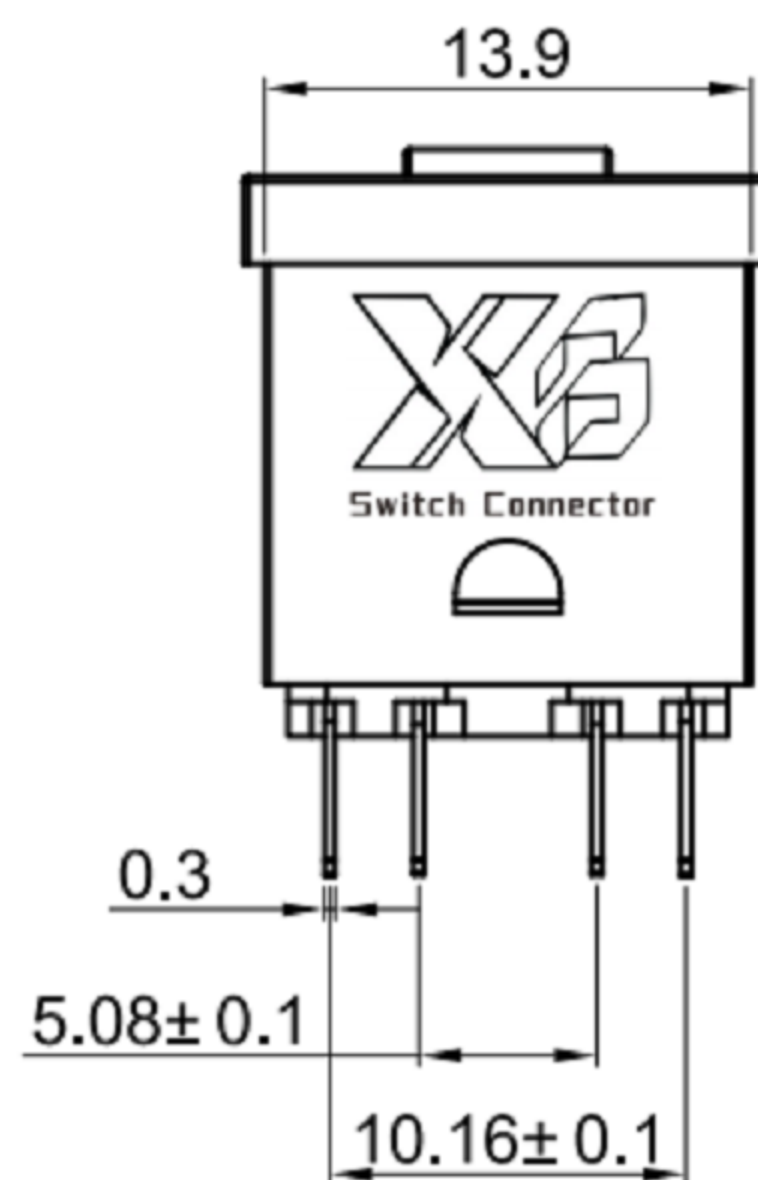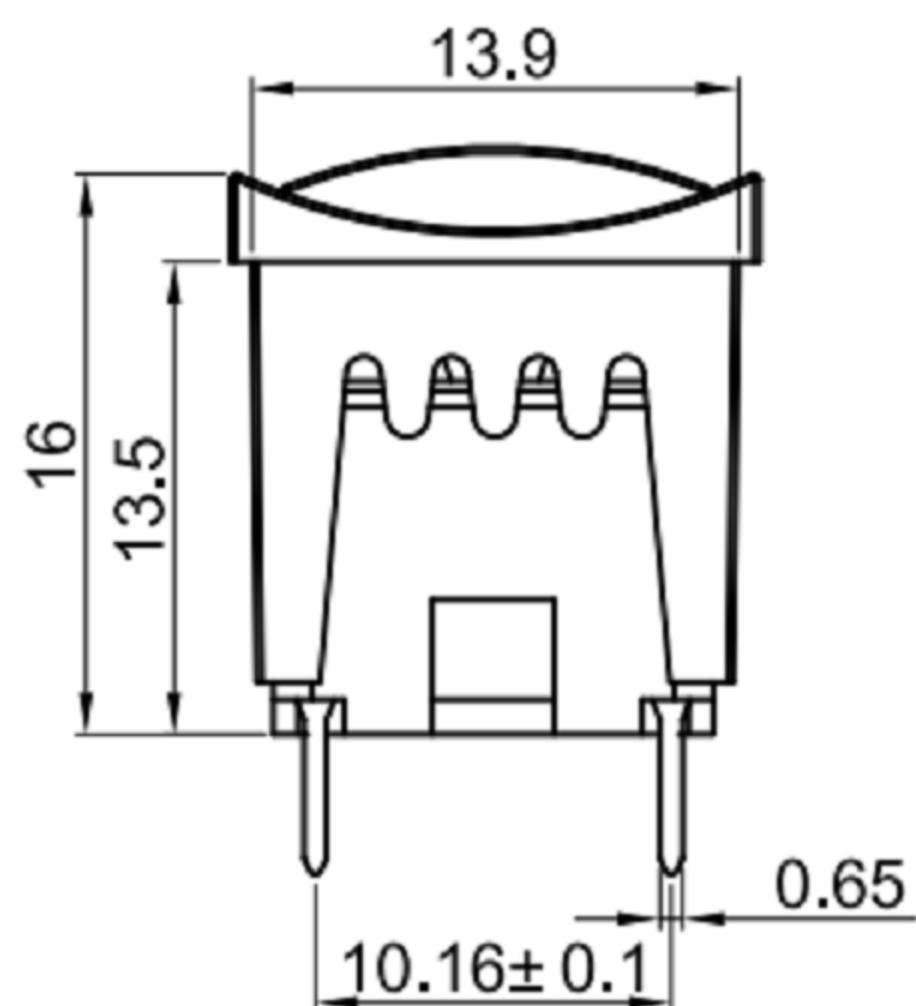

Rating: Min. 0.5uA
Max. 250mA/120V/9W AC/6W DC
Contact Resistance: 100mΩ Max
Insulation Resistance: 10MΩ Min
Dielectric Strength: AC 1000V for 2 minute
Total travel: 1.8±0.4mm
Operating Force: 250±50gf
Mechanical Life: Over 500,000 cycles
Electrial Life: Over 100,000 cycles
Operating Temperation: -40° C~75° C
MATERIAL:
Base: LCP;
Actuator: LCP;
Terminal: Phosphor bronze, Gold plated.

Temperature and duration of dipping:
Wave: Max 260° C for Max 10 seconds.
270° C for Max 5 seconds.
Soldering iron: Max 350° C for Max 3 seconds.

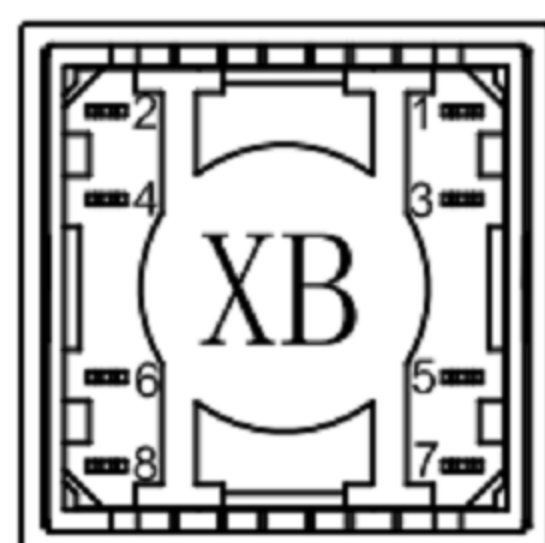

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	DATE	DESCRIPTIONS OF REVISION	APPD.
8					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版
7					OVER 1.5mm : ±0.2mm	ISSUE	DATE	ZENQ. CHEN
6					TITLE : Push Switch			
5					MODEL: XB-PB-K-07S			
4	CONTACT	SUS	1	Ag CLAD	UNIT : mm			
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	SCALE: 5:1			
2	COVER	STEEL STRIP	1	Ni PLATED	DWN. JUN. YANG			
1	KNOB	PPA	1	BLACK	CHK'D DONG. PANG			
					APPD. ZENQ. CHEN			