

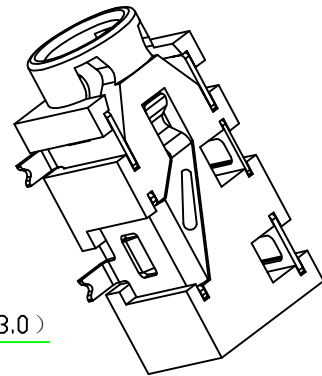
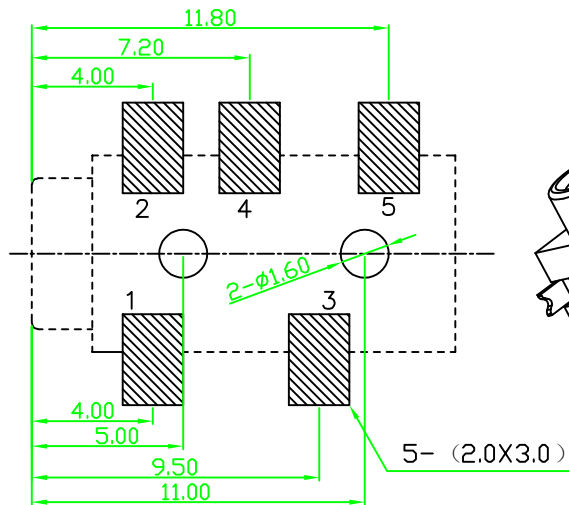
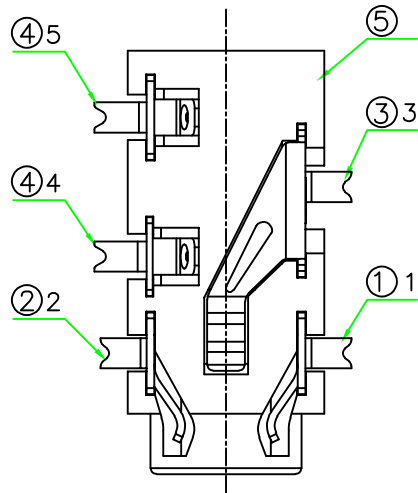
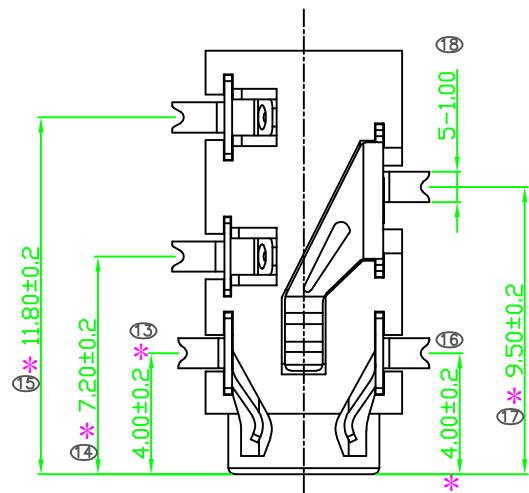

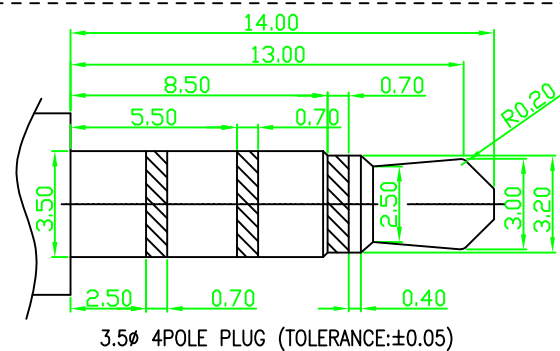


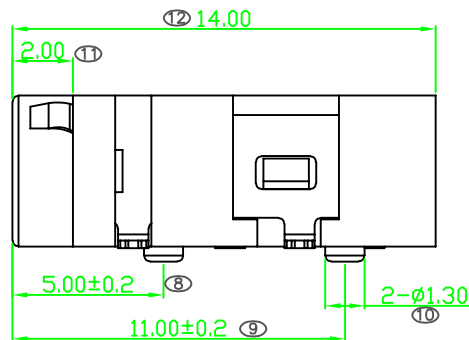

RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE:±0.05)

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING:12V 1A
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.3~3.0 KGF
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF
- LIFE TEST: 5,000 CYCLES MIN.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- * REPRESENT CRITICAL DIMENSIONS.

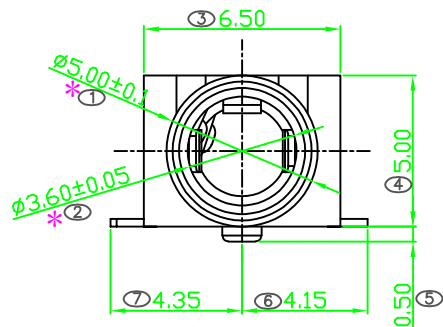

⑤	HOUSING	1	PA9T	BLACK
④	TERMINAL 4#	1	PHOSPHOR BRONZE 0.25t	GOLD FLASH PLATED
③	TERMINAL 3#	1	PHOSPHOR BRONZE 0.25t	GOLD FLASH PLATED
②	TERMINAL 2#	1	PHOSPHOR BRONZE 0.25t	GOLD FLASH PLATED
①	TERMINAL 1#	1	PHOSPHOR BRONZE 0.25t	GOLD FLASH PLATED
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	Tony	PART NAME:
DIM TOL	DIM TOL	CHECK:	2019.12.22	Φ3.5 PHONE JACK
X. ±0.50	X. ±2°	APPROVED	Andy	PART NO.
X.X ±0.30	X.X ±1°		2019.12.22	XB-91PJ03505-0383-310H
X.XX ±0.20	X.XX			SHEET: 1/1 REV.: A1
X.XXX ±0.10	X.XXX			DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------