
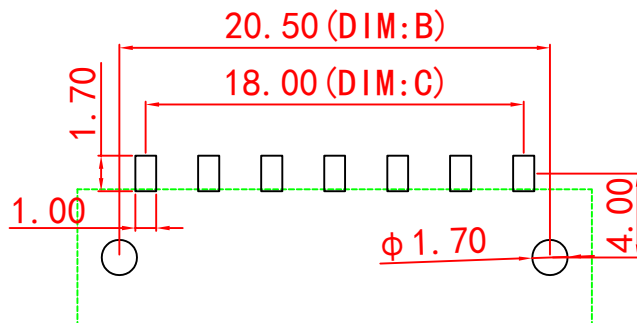

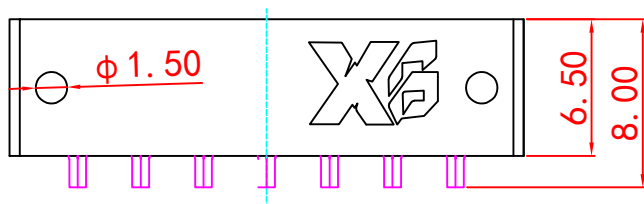
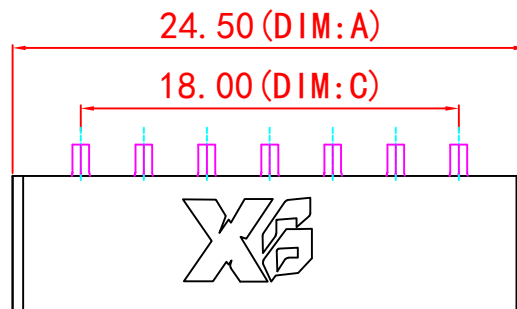


RoHS
Compliant

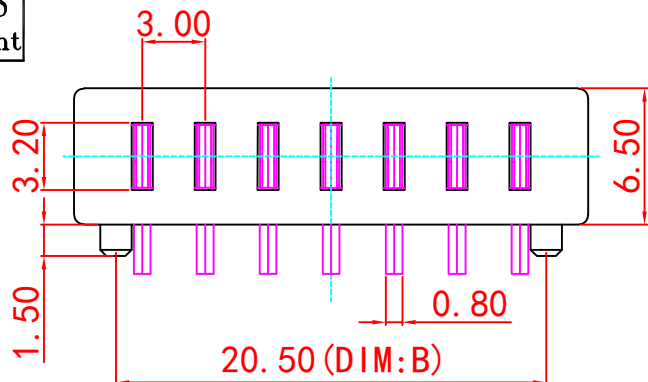

PCB LAYOUT

SYMBOL	REVISION	APPROVAL	DATE

规格尺寸: 型号	DIM:A	DIM:B	DIM:C
XB-D01F-W-2P-S1	9.50	5.50	3.00
XB-D01F-W-3P-S1	12.50	8.50	6.00
XB-D01F-W-4P-S1	15.50	11.50	9.00
XB-D01F-W-5P-S1	18.50	14.50	12.00
XB-D01F-W-6P-S1	21.50	17.50	15.00
XB-D01F-W-7P-S1	24.50	20.50	18.00
XB-D01F-W-8P-S1	27.50	23.50	21.00
XB-D01F-W-9P-S1	30.50	26.50	24.00
XB-D01F-W-10P-S1	33.50	29.50	27.00
XB-D01F-W-11P-S1	36.50	32.50	30.00
XB-D01F-W-12P-S1	39.50	35.50	33.00

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: DC 12V 15A / Pin
 - 1-2. CONTACT RESISTANCE: 30mΩ
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 500MΩ ,
MEASURED BY 500V DC
- LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES
- TEMPERATURE RISE : 30° C MAX

2	HOUSING	PA9T	1	BLACK
1	CONTACT TERMINAL	C70250	7	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NAME	CONNECTOR		DRAWING	ZENQ. CHEN	DWG. No.	3.0母座
PART NO.	XB-D01F-W-2P/12P系列		CHECK	JUN. YANG	REV.	W1
	UNIT:	TOLERANCE	X. ±0.15 X." ±1°	ANGLE	APPROVAL	DONG. PANG
	mm	OTHERWISE	X.X ±0.10 X.X" ±0.5° X.XX ±0.05 X.XX" ±0.05° X.XXX ±0.005 X.XXX" ±0.005°	0° ±3°	SCALE	3:1
				PAGE	DATE	5/8/2023
				PAGE	1 OF 1	