

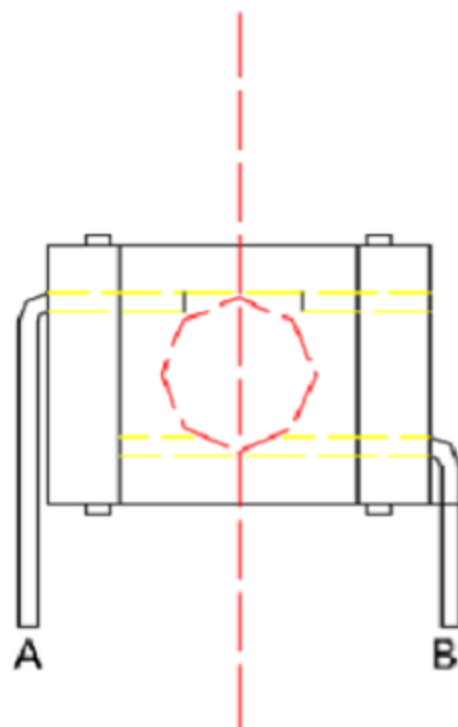
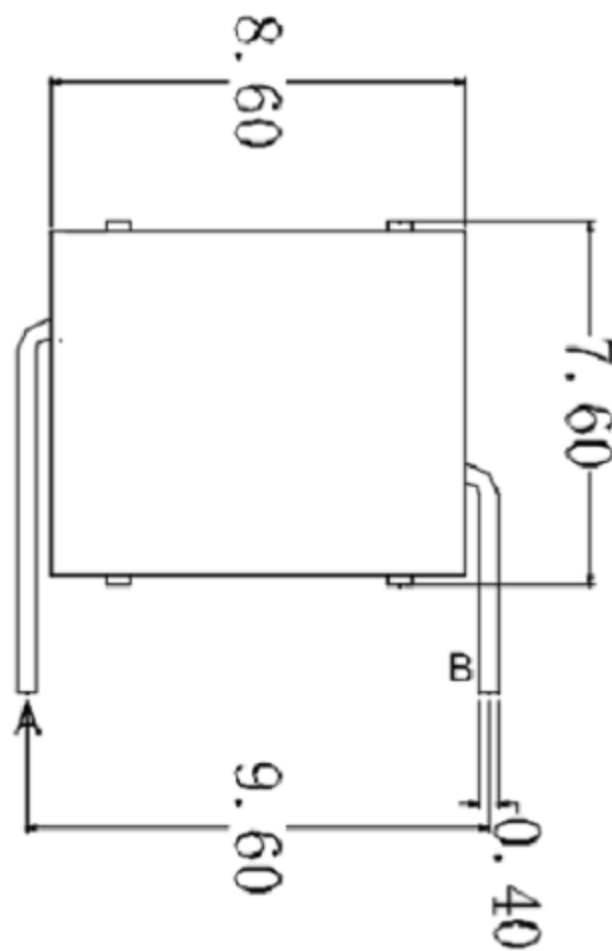


CAD FILE:


ROHS

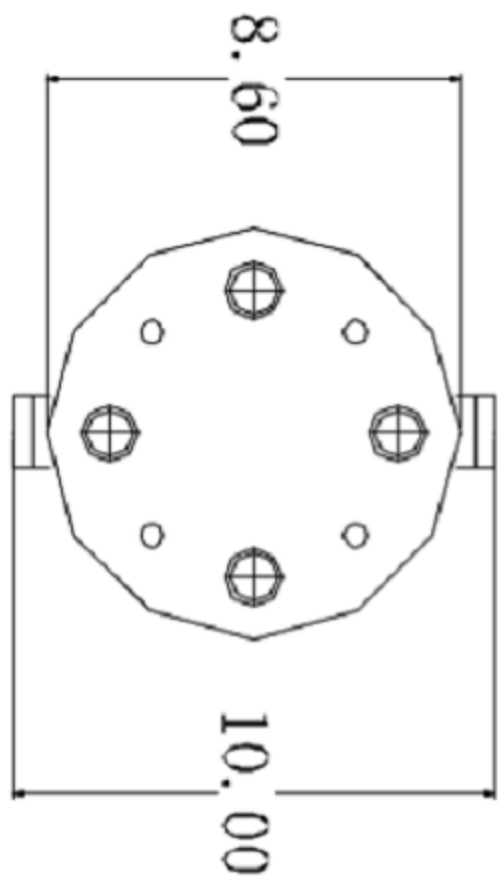


图一:AB端子断开(OFF)

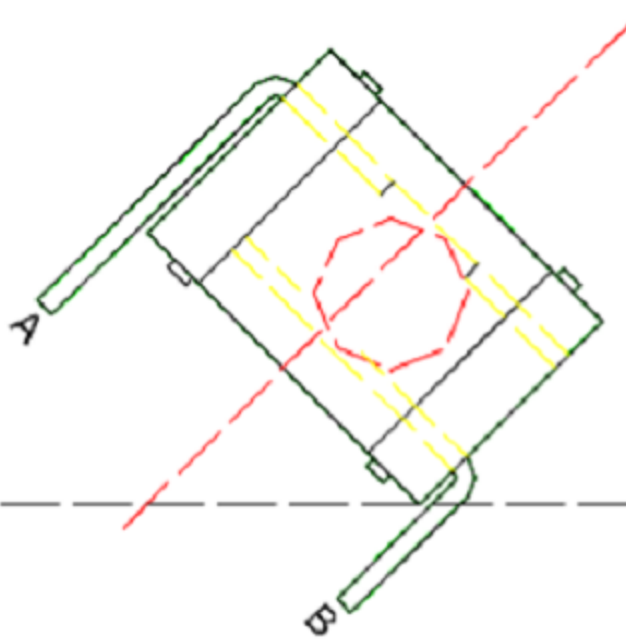


图二:顺时针方向旋转45°
AB端子导通(ON)

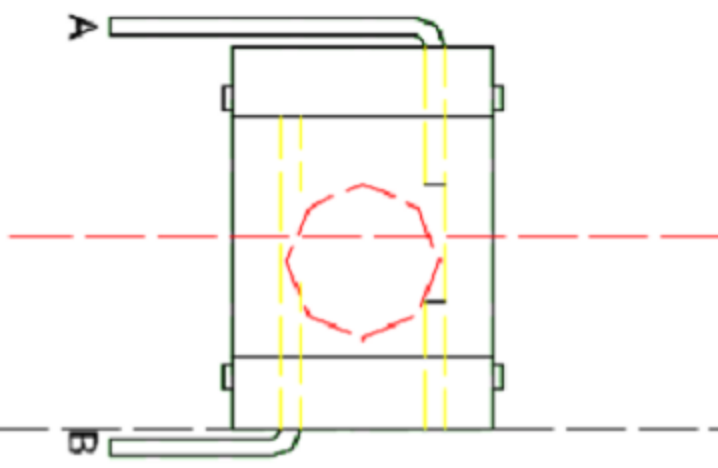



图三:顺时针方向旋转90°
AB端子导通(ON)

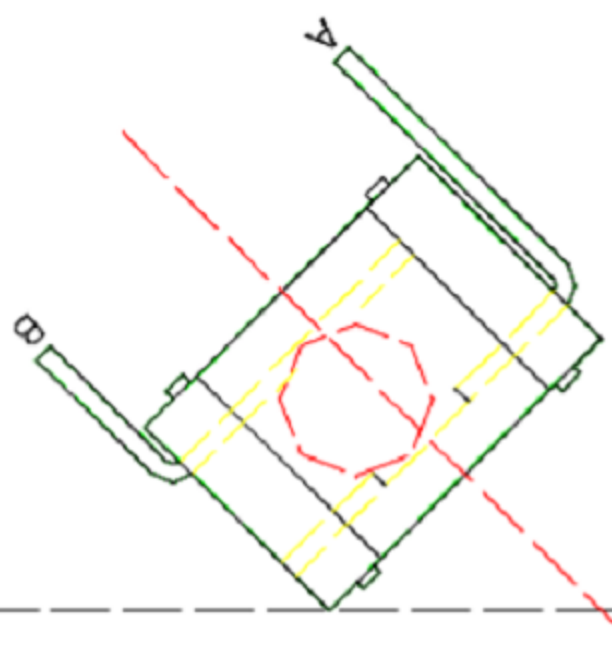

图四:顺时针方向旋转135°
AB端子导通(ON)

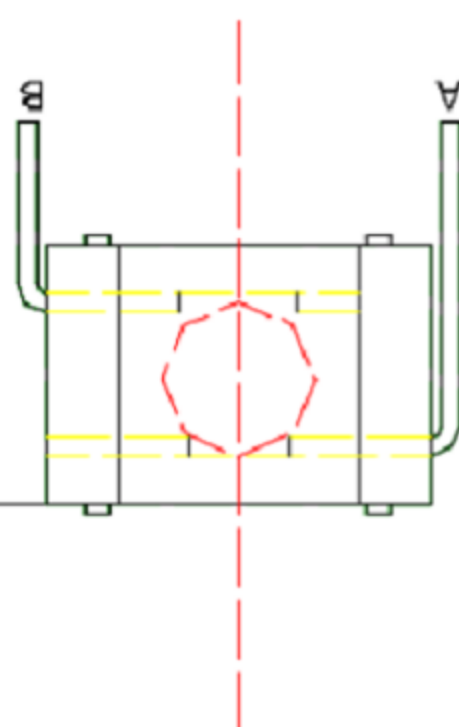

图五:顺时针方向旋转135°
AB端子断开(OFF)

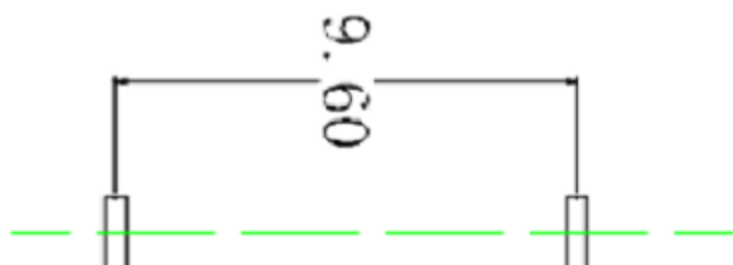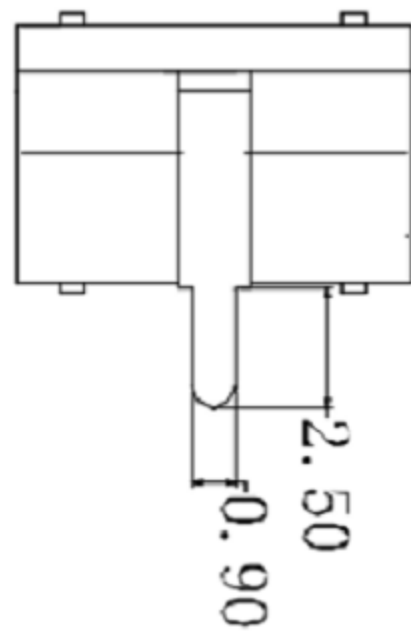

特性:

- 1: 倾斜触发讯号属于由开路转换成导通或瞬间导通状态的倾斜开关.
- 2: 最适用于IC之触发讯号。

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版		ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Vibration Switch			UNIT : mm	DRWG NO.: XB-CZ12-8254	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED				SCALE: 5:1	DWN.	JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	MODEL:				CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK					APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.					