


CAD FILE:


ROHS

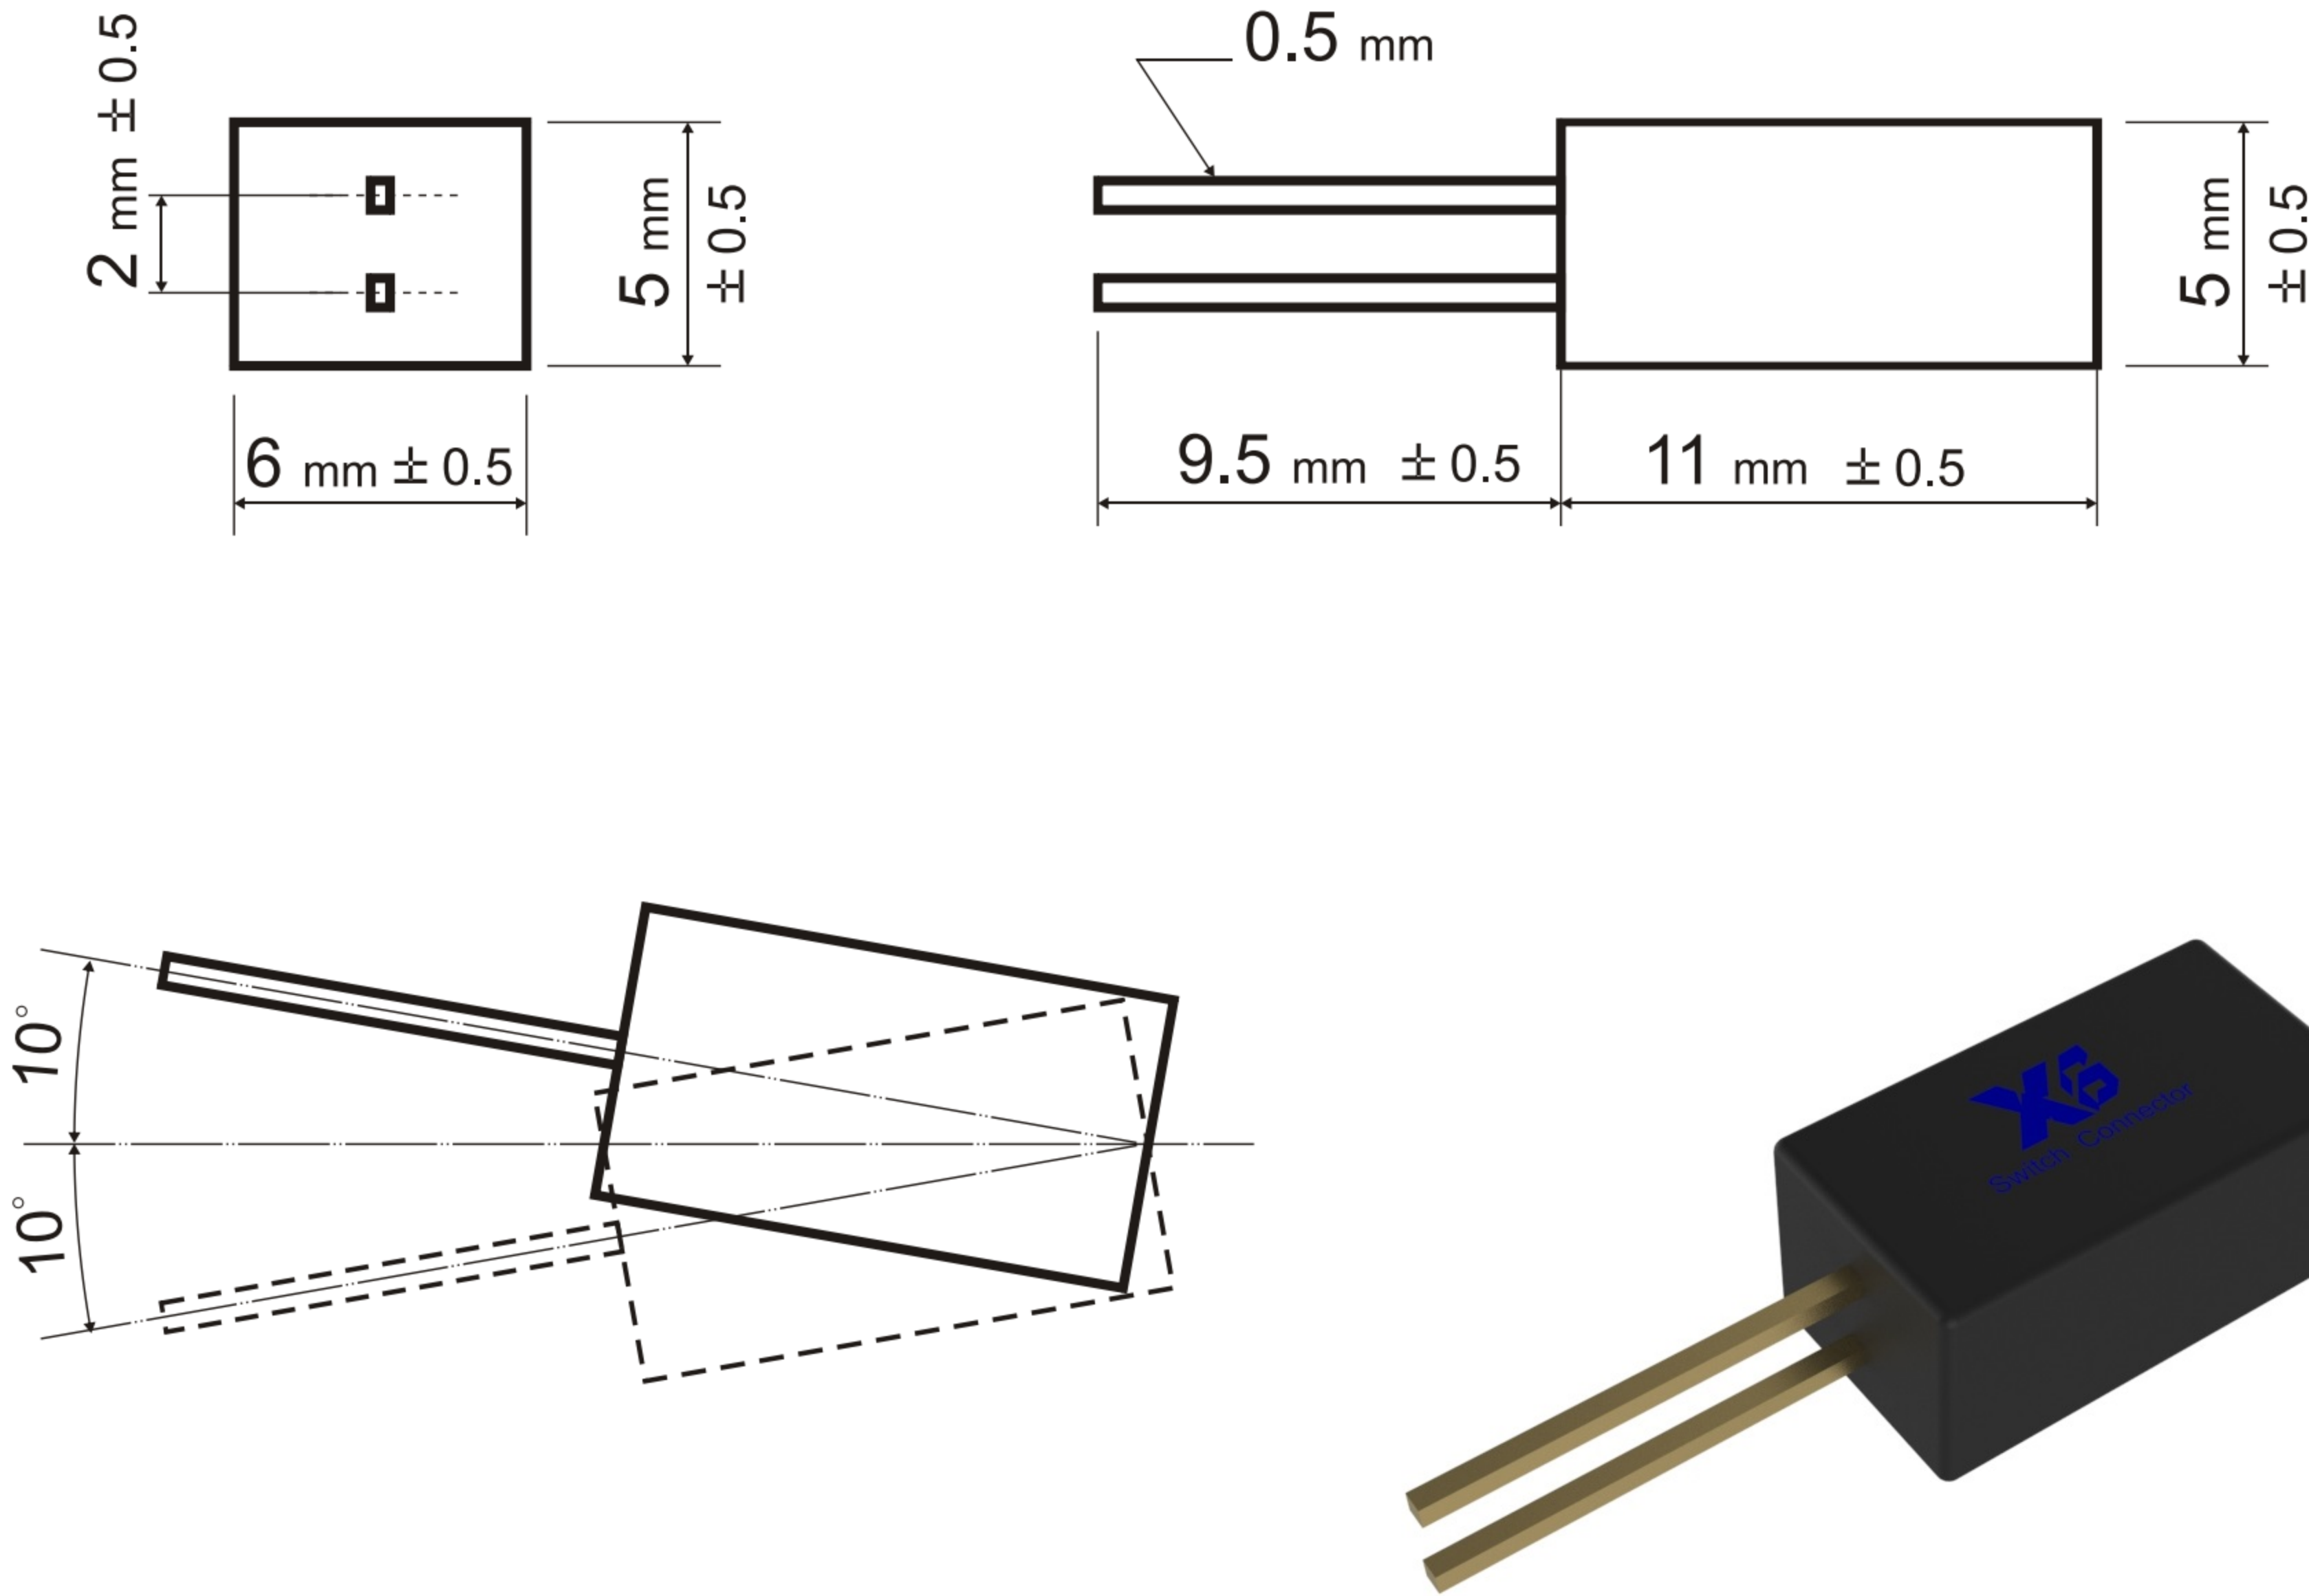

R511 vibration switch are sensitive to trigger, and are made from environmental friendly materials. They are airtight, dustproof, waterproof, operates with a small action angle, and has a long operation life. The product is suitable for low voltages and currents. Patent protected.

Game machines, toys, security systems, electrical and electronic products, personal security alarms, vibration sensors, and car alarms.

- 1. Maximum Switch Rating : 24VDC, 6mA
- 2. Electrical Life : 100,000 cycles Min.
- 3. Contact Resistance : 0.5Ω Max.
- 4. Differential Angle : 10° Max.
- 5. Solder Temperature : Manual soldering 350℃, 3~5 seconds.
- 6. Operating Temperature : -40℃~+85℃

8					TOLERANCE UNLESS SPECIFIED				
7									
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版	ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : <b>Vibration Switch</b>			UNIT : mm	DRWG NO.: <b>XB-R511</b>
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED				SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	MODEL:			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	 <b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONI CS CO., LTD.				