








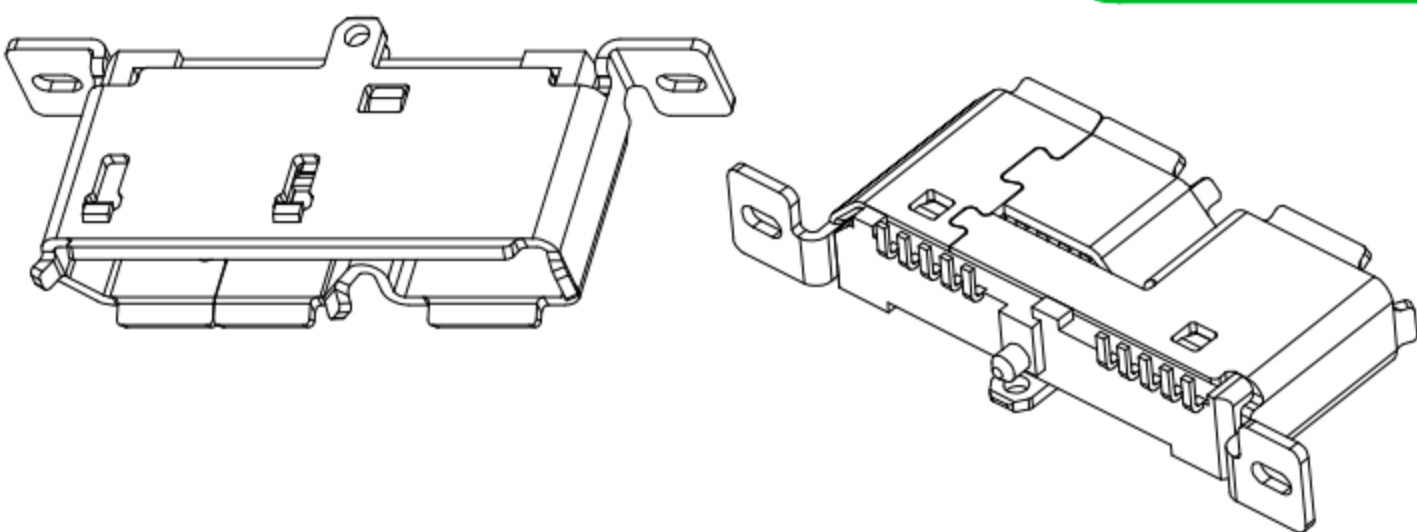


MRUSB-10B30xVSE-S242

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

P.C.B LAYOUT MOUNTING PATTERN

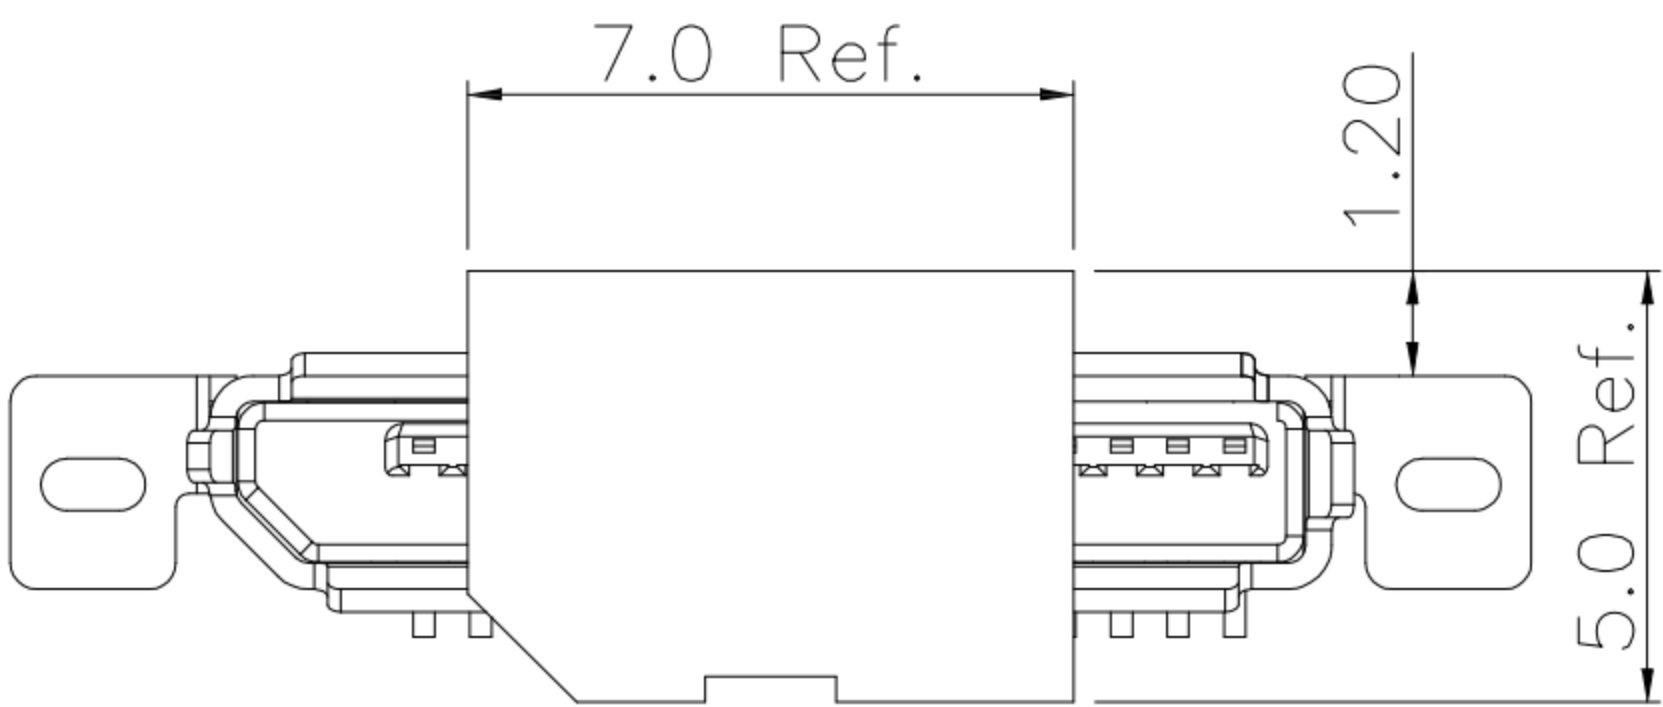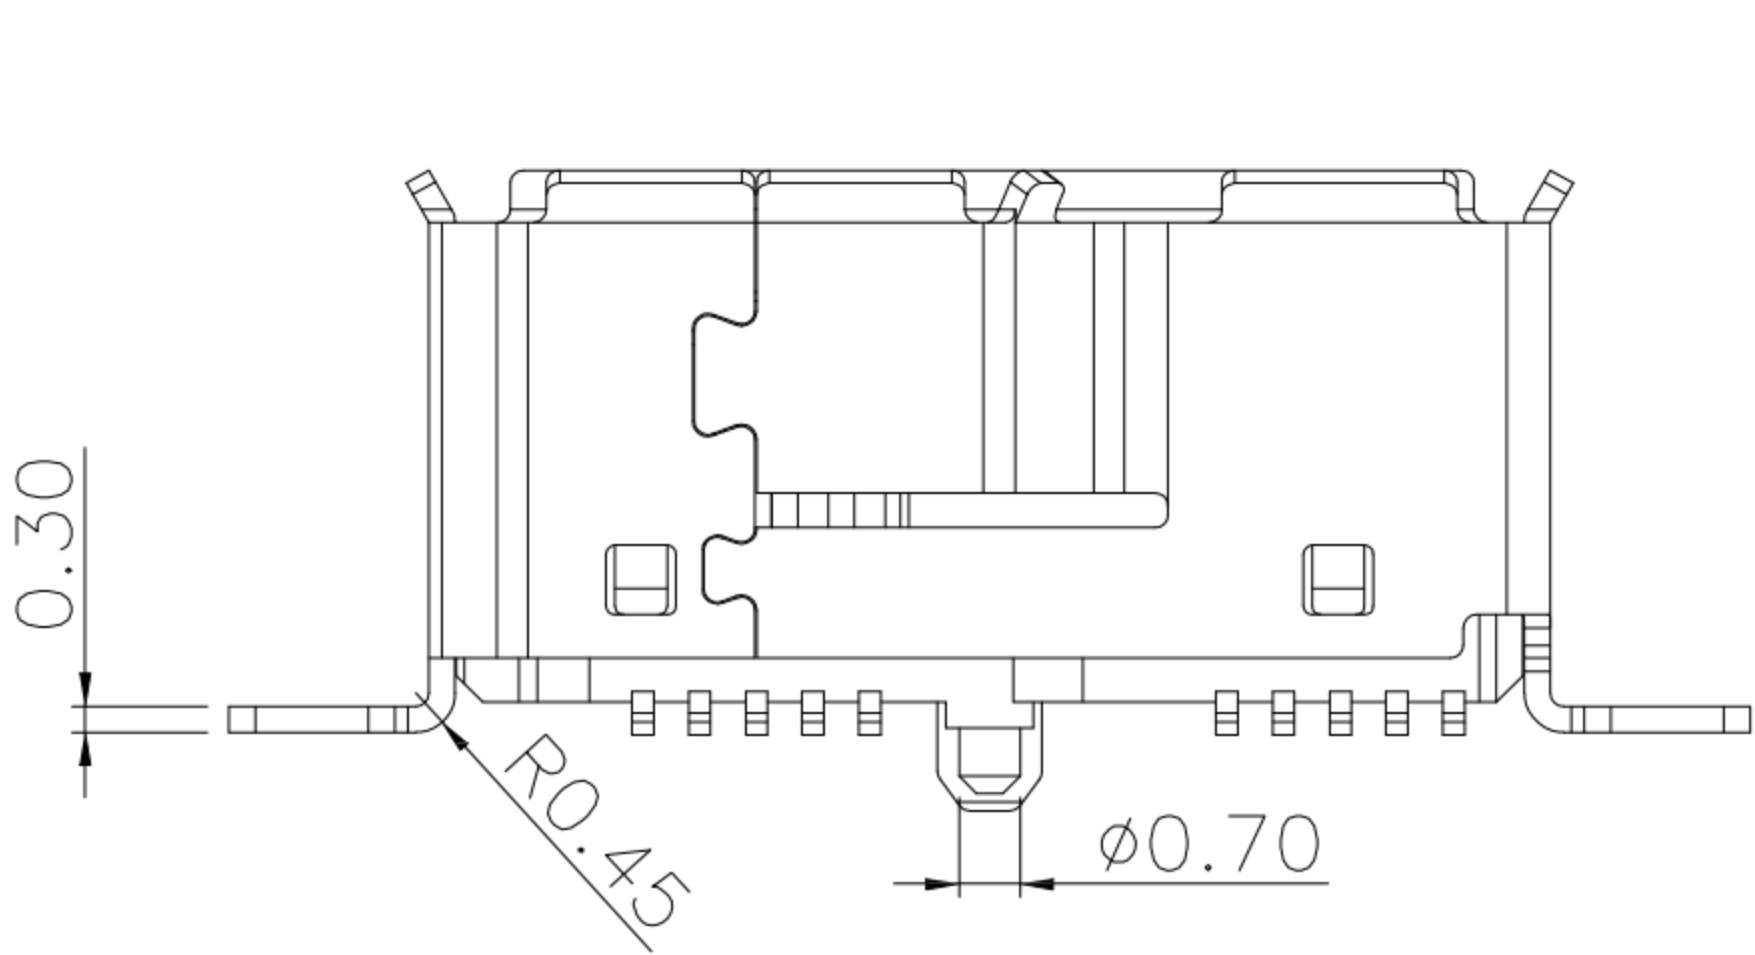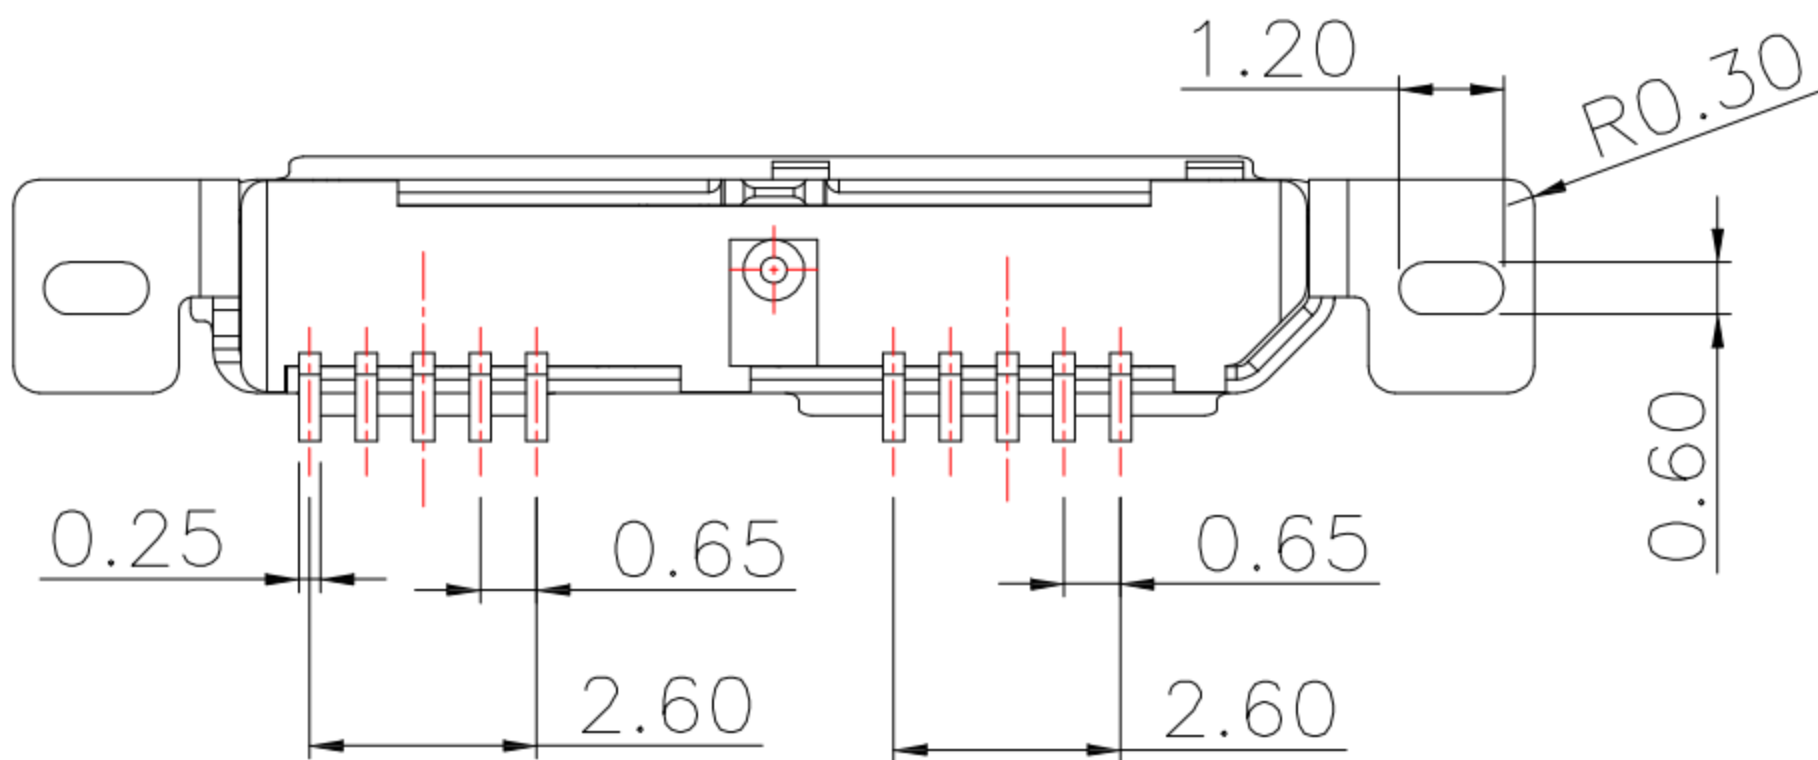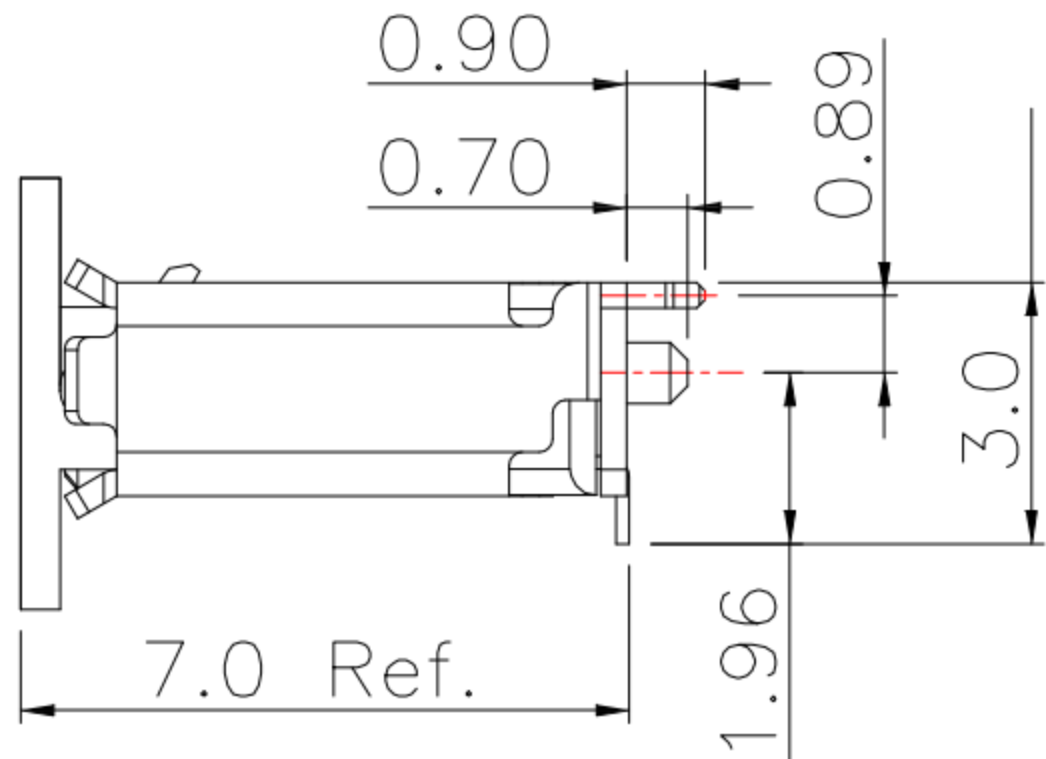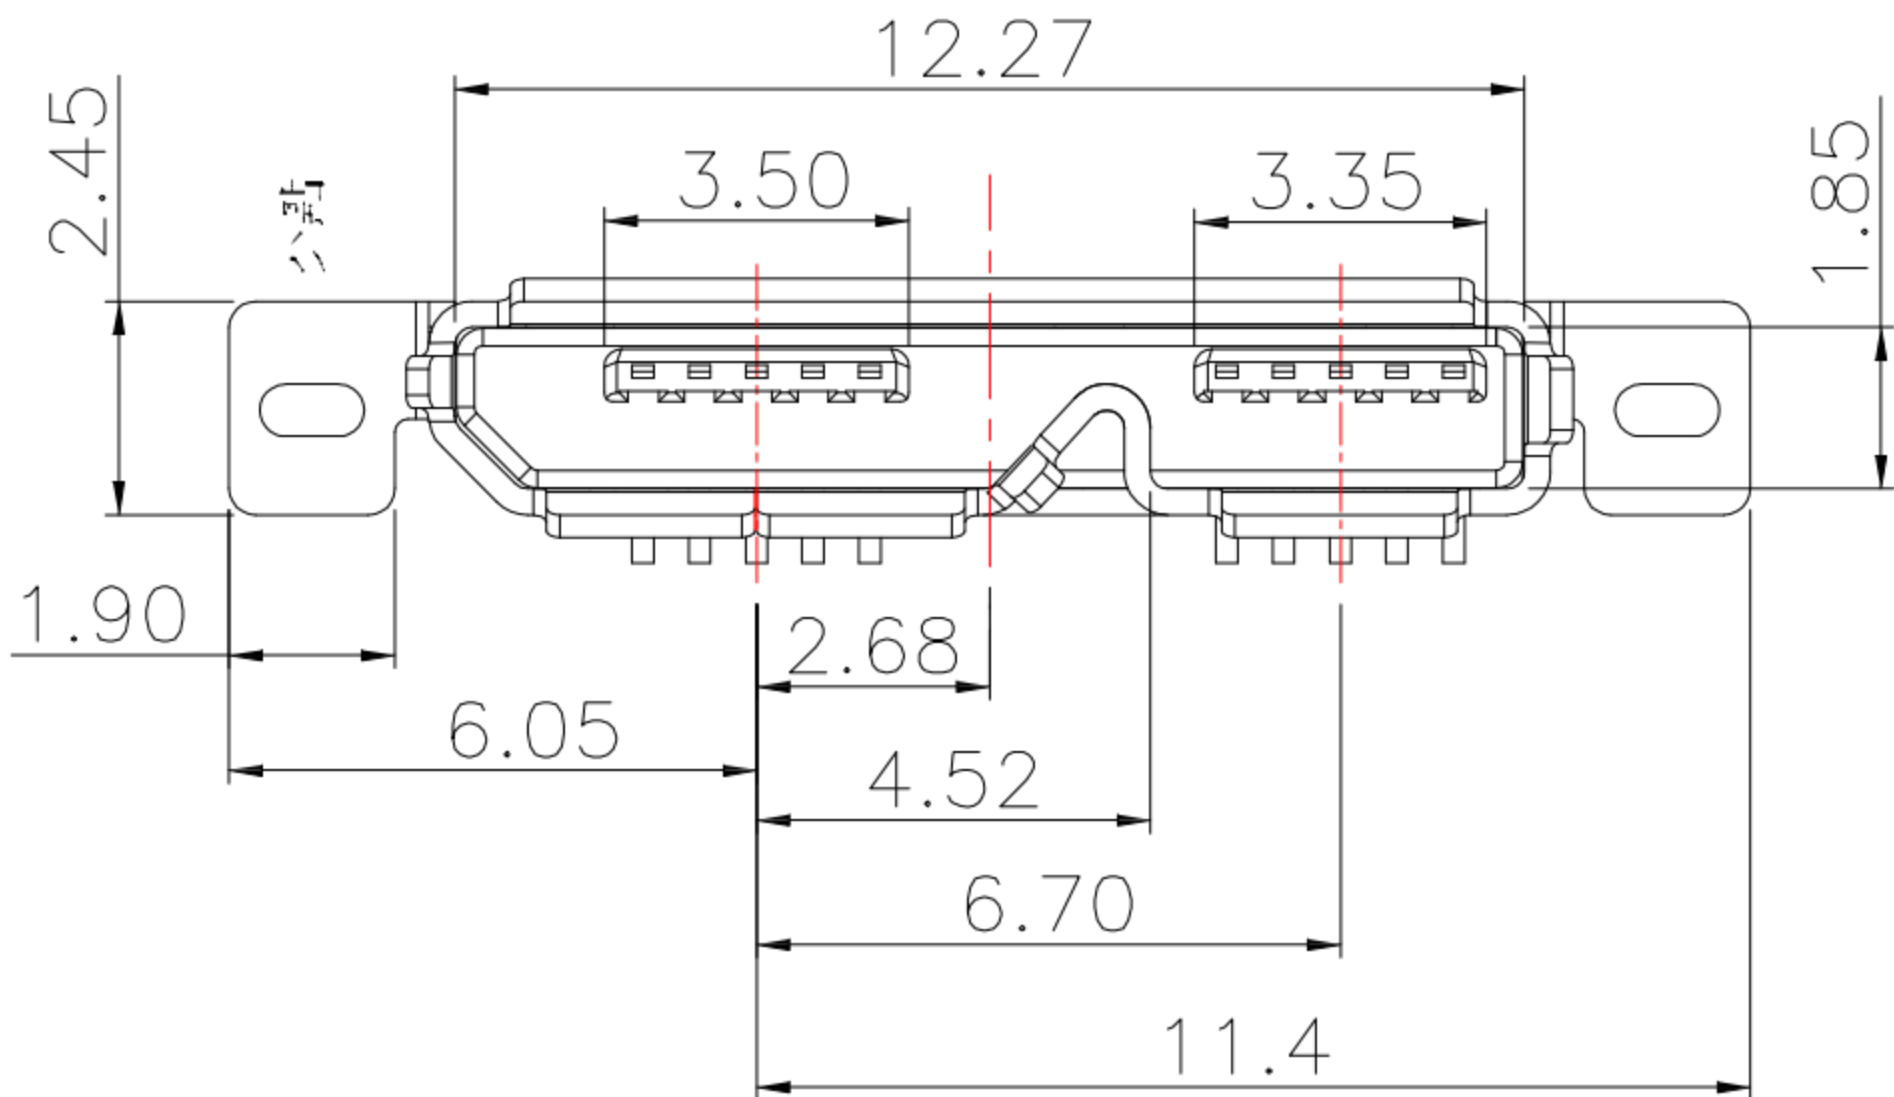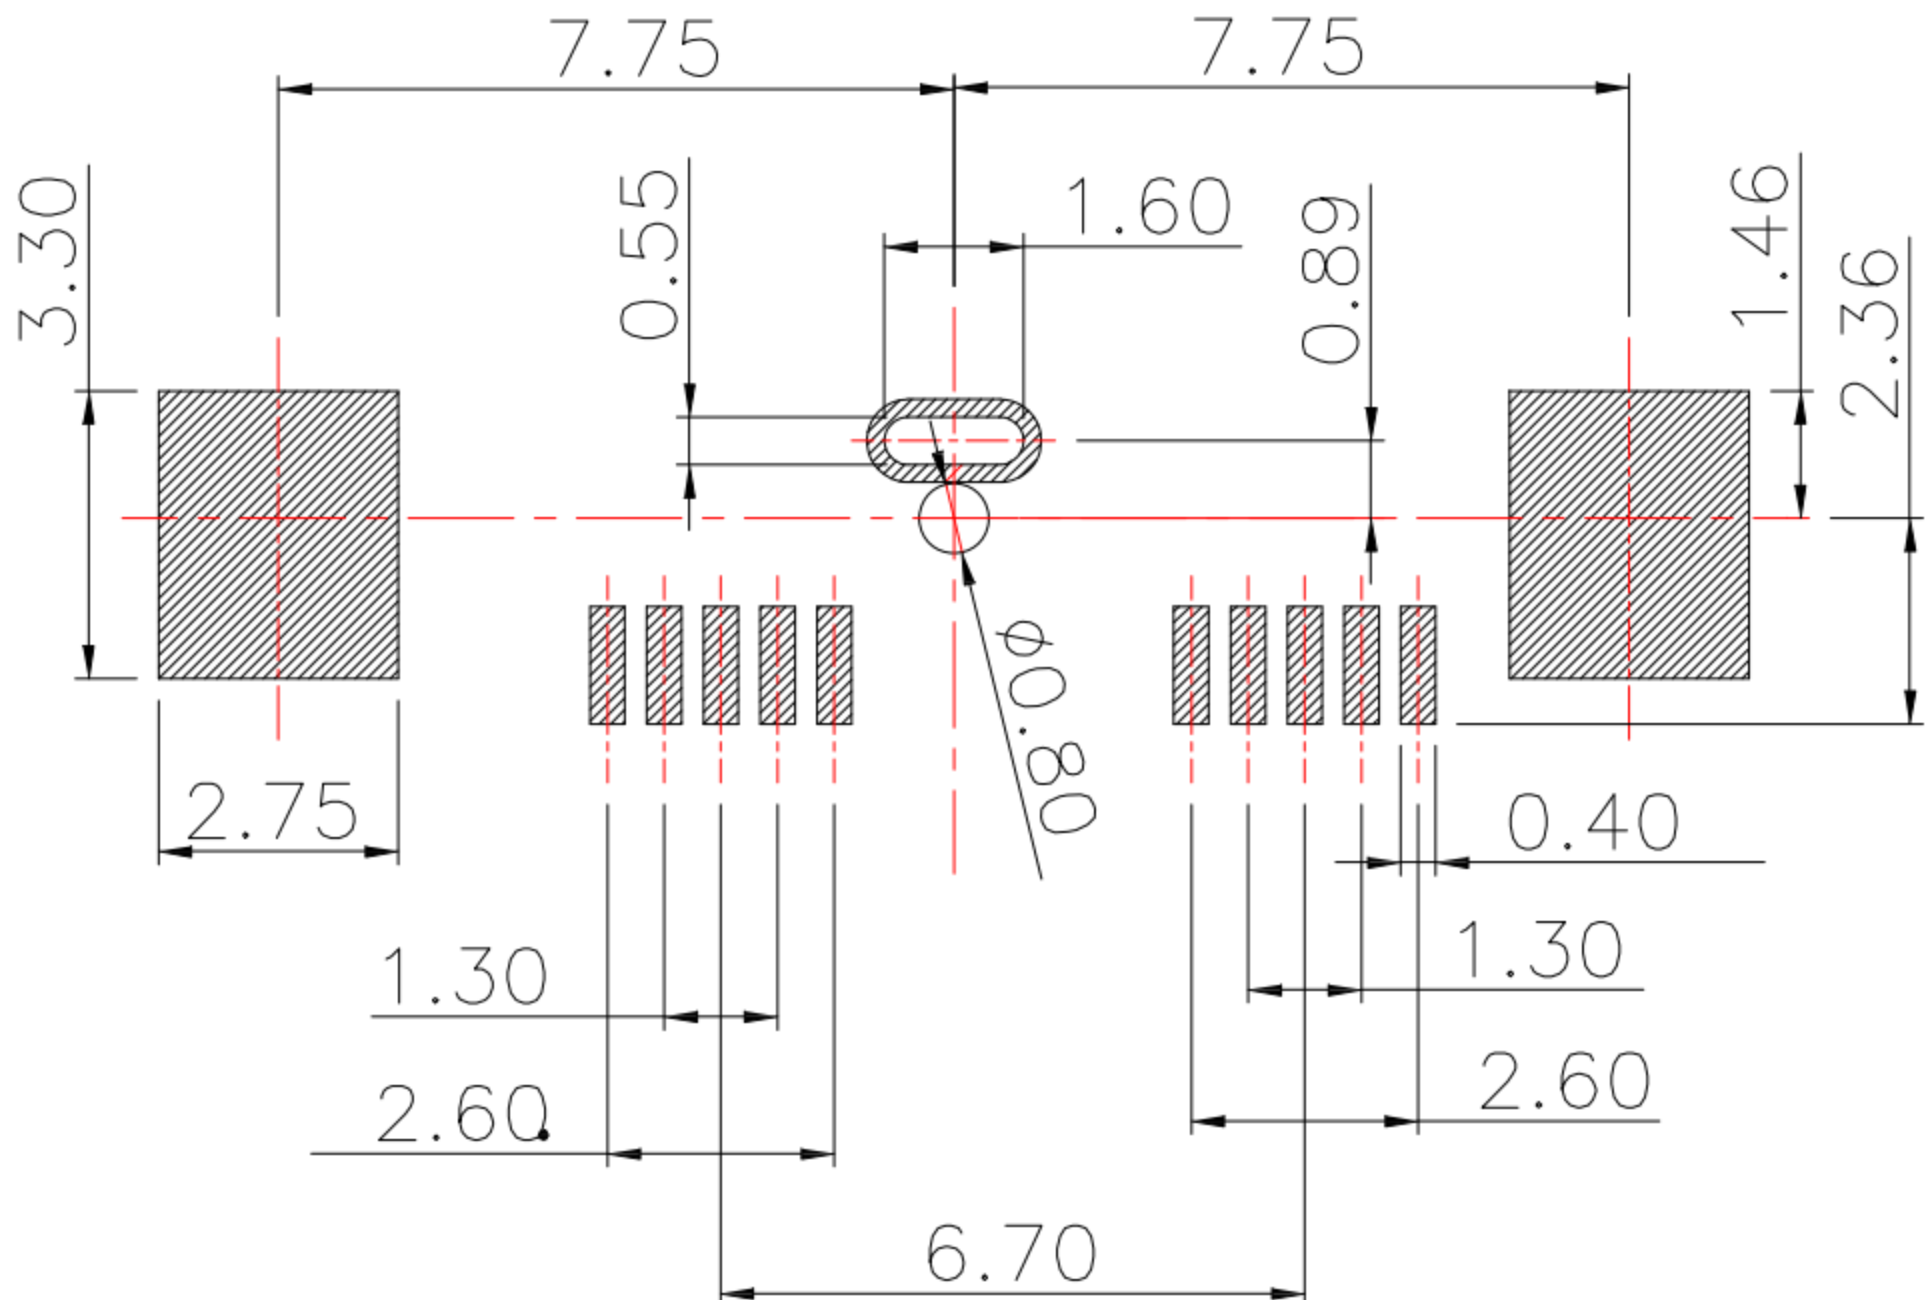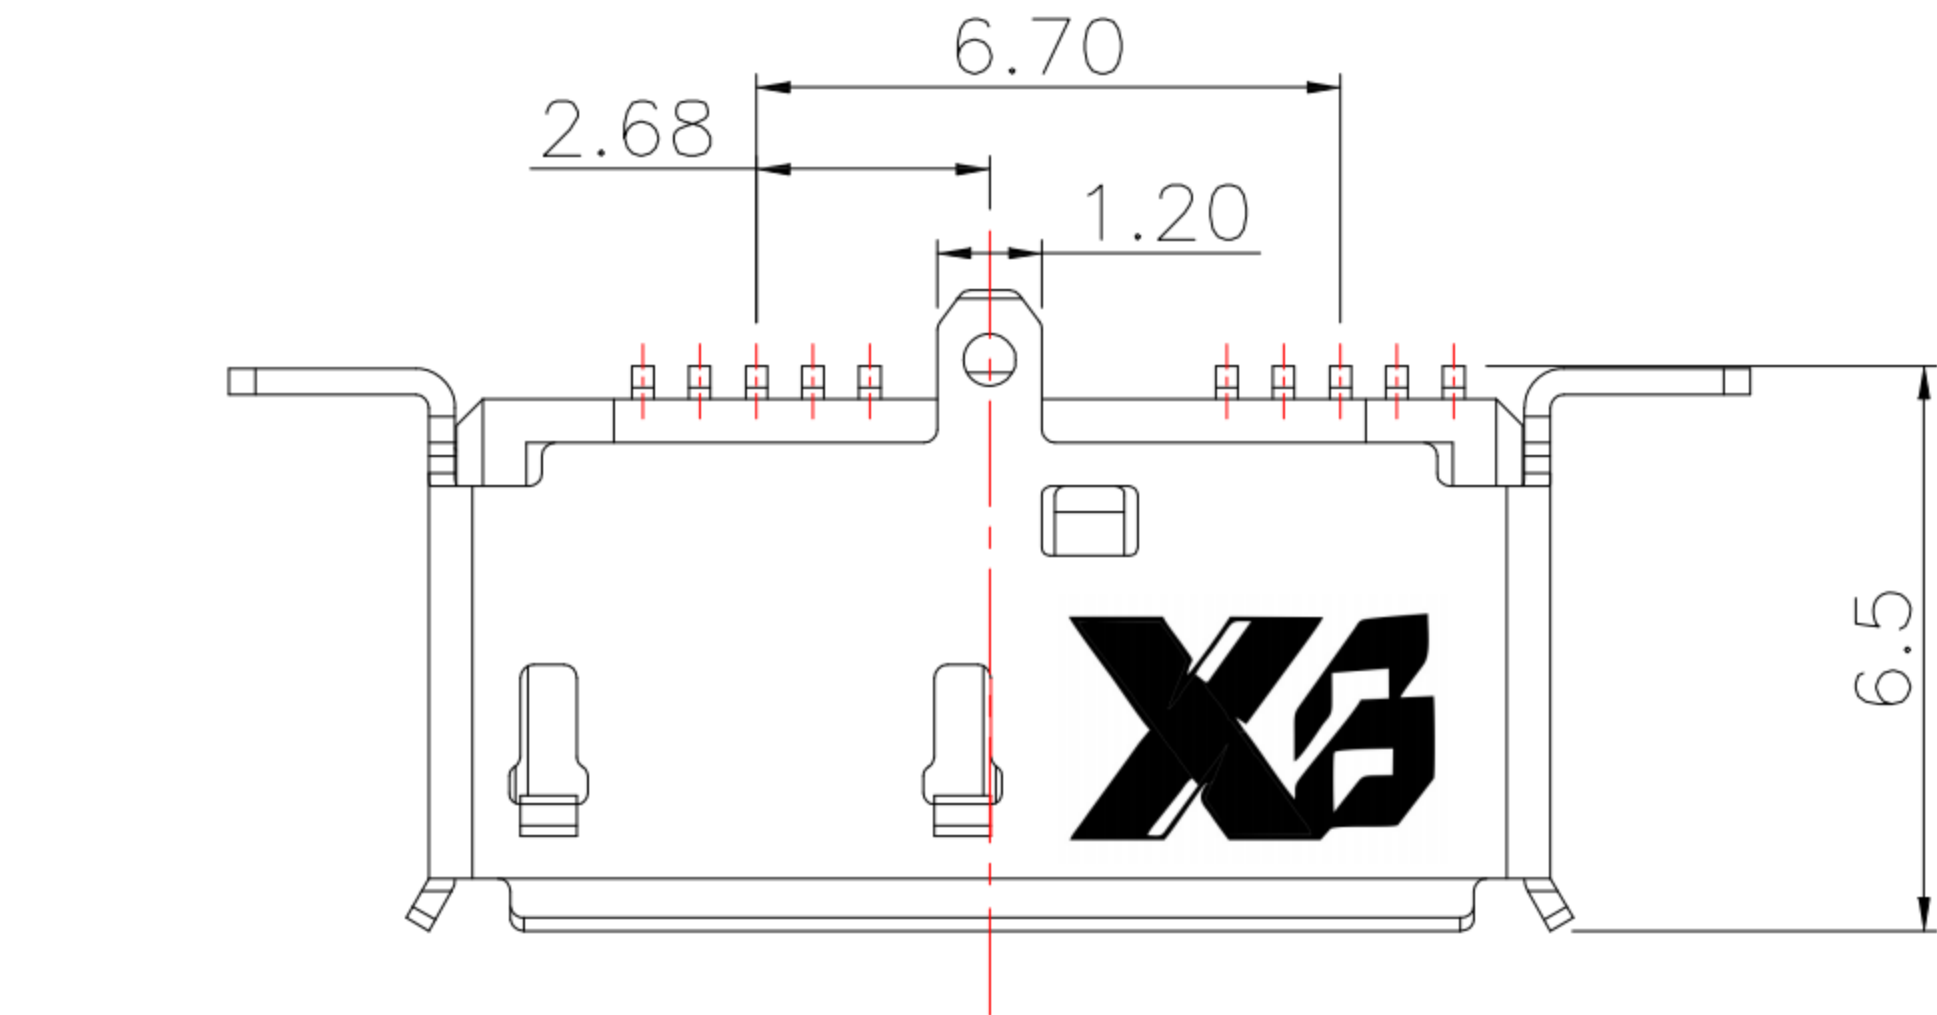


4	CAP	1	LCP	UL94V-0; COLOR:BLACK
3	SHELL	1	SUS304	Nickel under Plated surface layer
2	CONTACT	10	BRASS	Plated Gold in Mating Area ; Tin Plated on Solder Balls ; Nickel under plated overall
1	HOUSING	1	LCP	UL94V-0; COLOR:BLACK
NO	TITLF	O'TY	MATFRIAL	RFMARK

XGB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 03/03/14

CHECKED BY: Jacky Chen
DATE: 03/03/14

APPROVED BY: Tony Kao
DATE: 03/03/14

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

MICRO 3.0 B TYPE 直立式 有柱

MRUSB-10B30xVSE-S242

MRUSB-10B30xVSE-S242

SIZE

A4

VER

R