
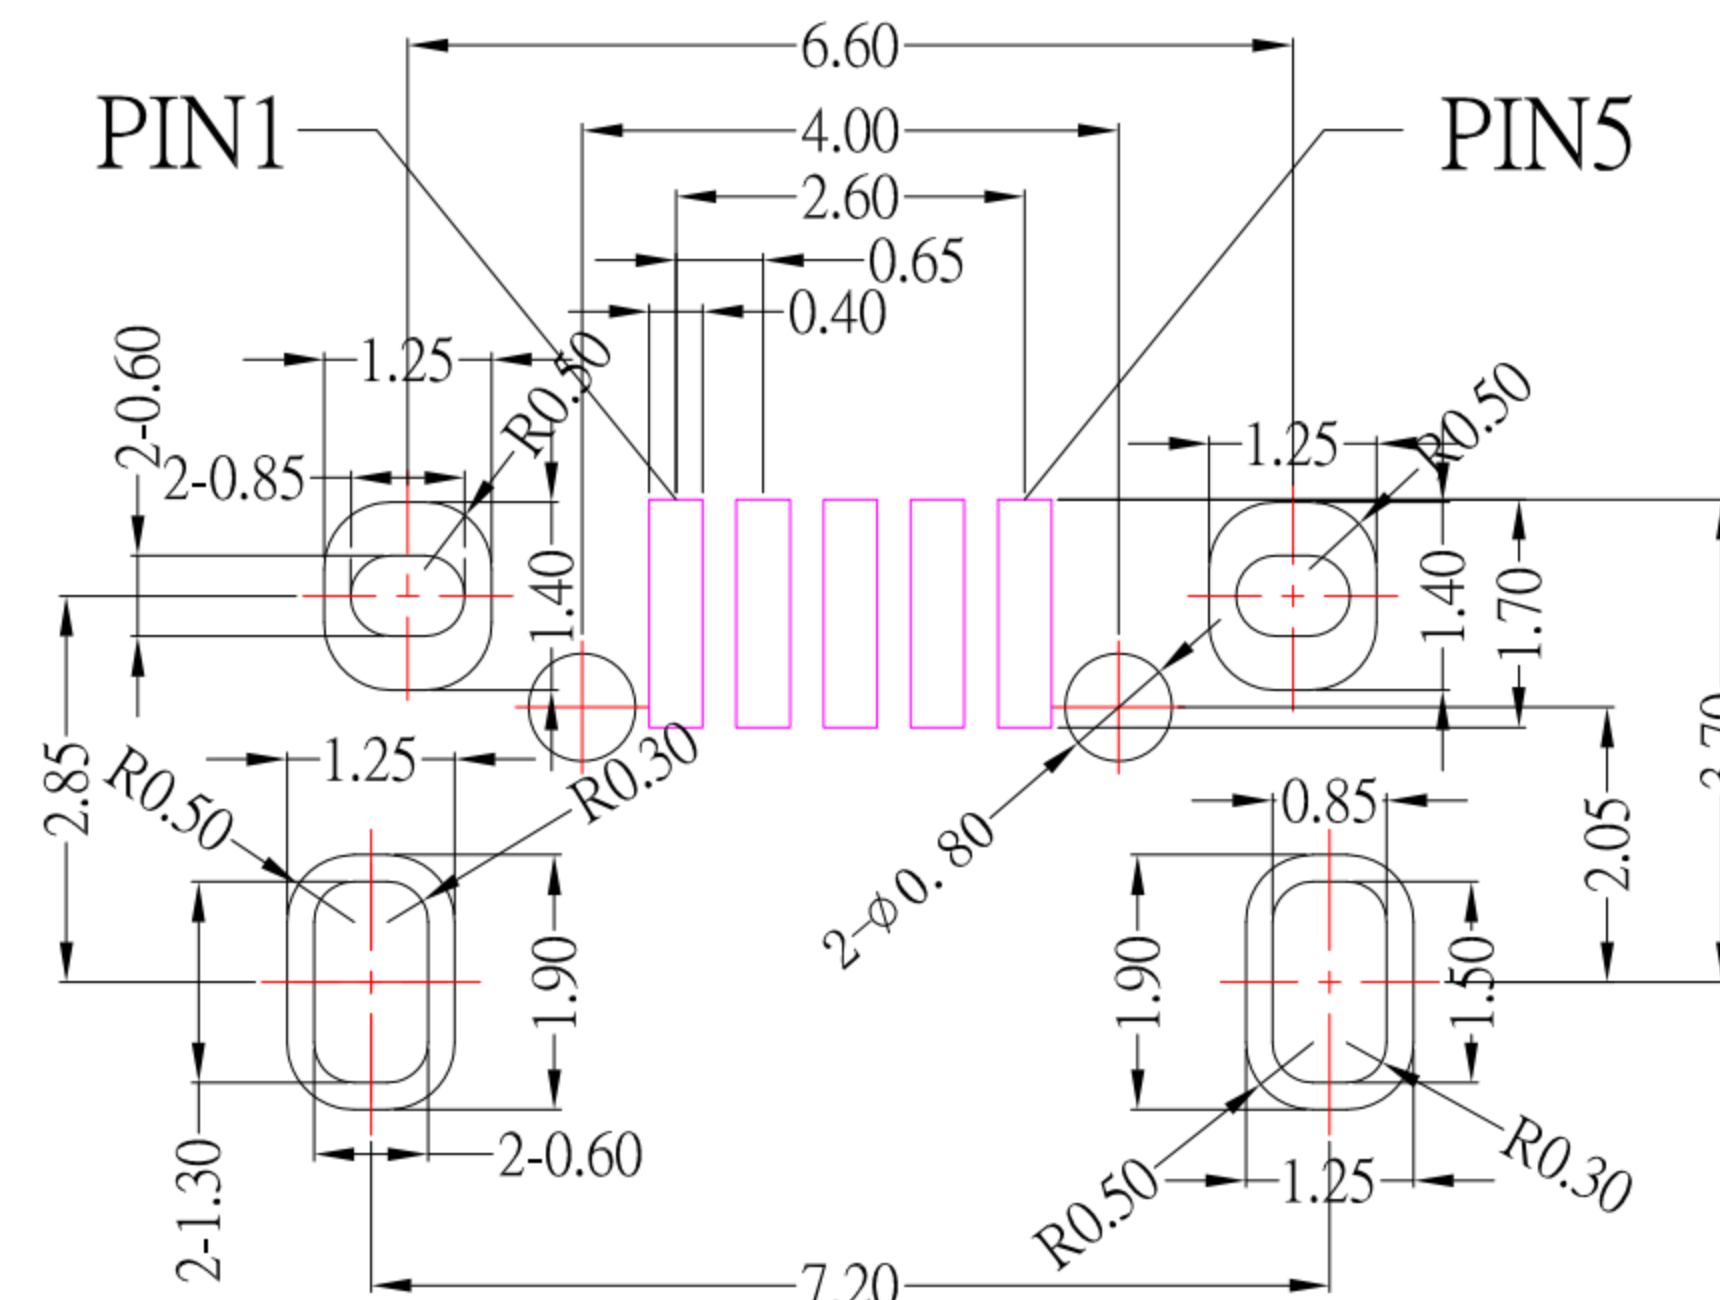


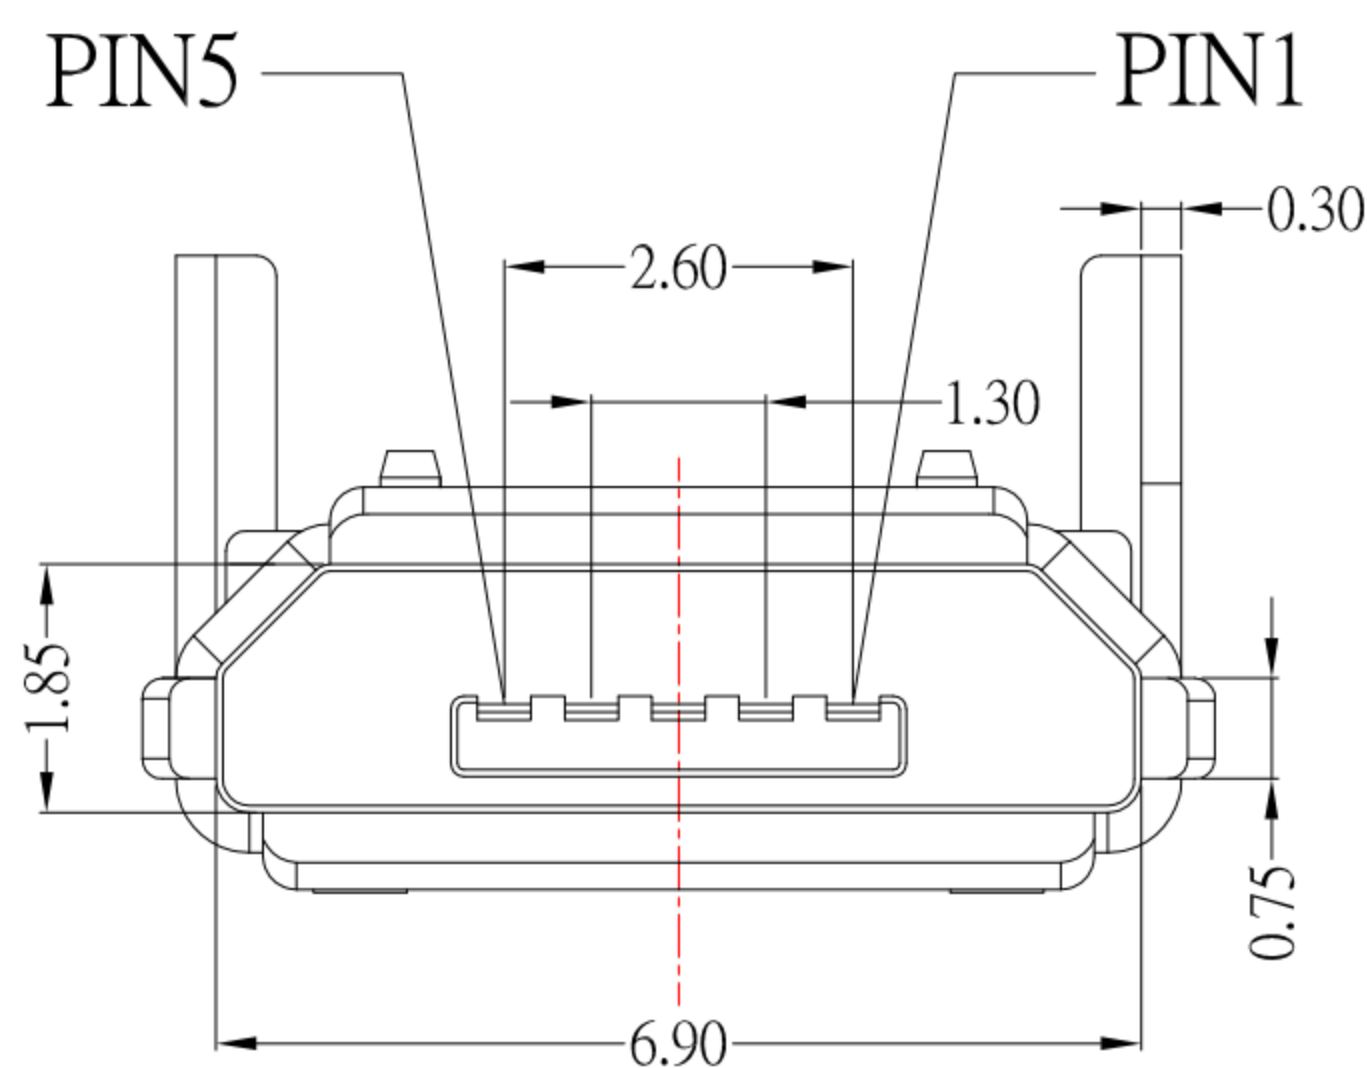

Electrical:

- 1.Current Rating: 1.0A
- 2.Voltage Rating: 30V
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 100 V AC Min
- 5.Insulation Resistance: 100 MΩ Min

Mechanical:





- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 35N (Max)
 - 1.2 Unmate force: 10N(Min)

Material:

- 1.Housing: LCP
- 2.Contact: Brass
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

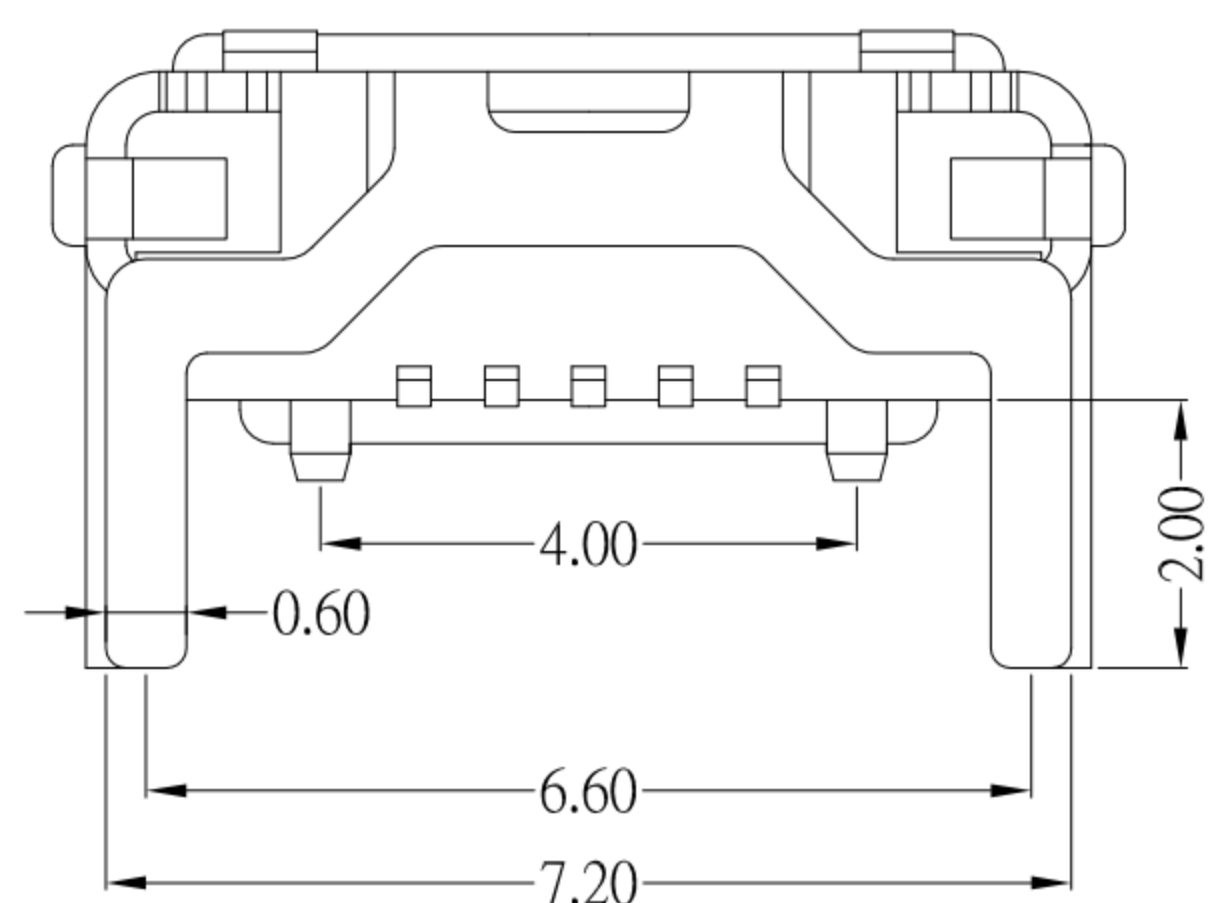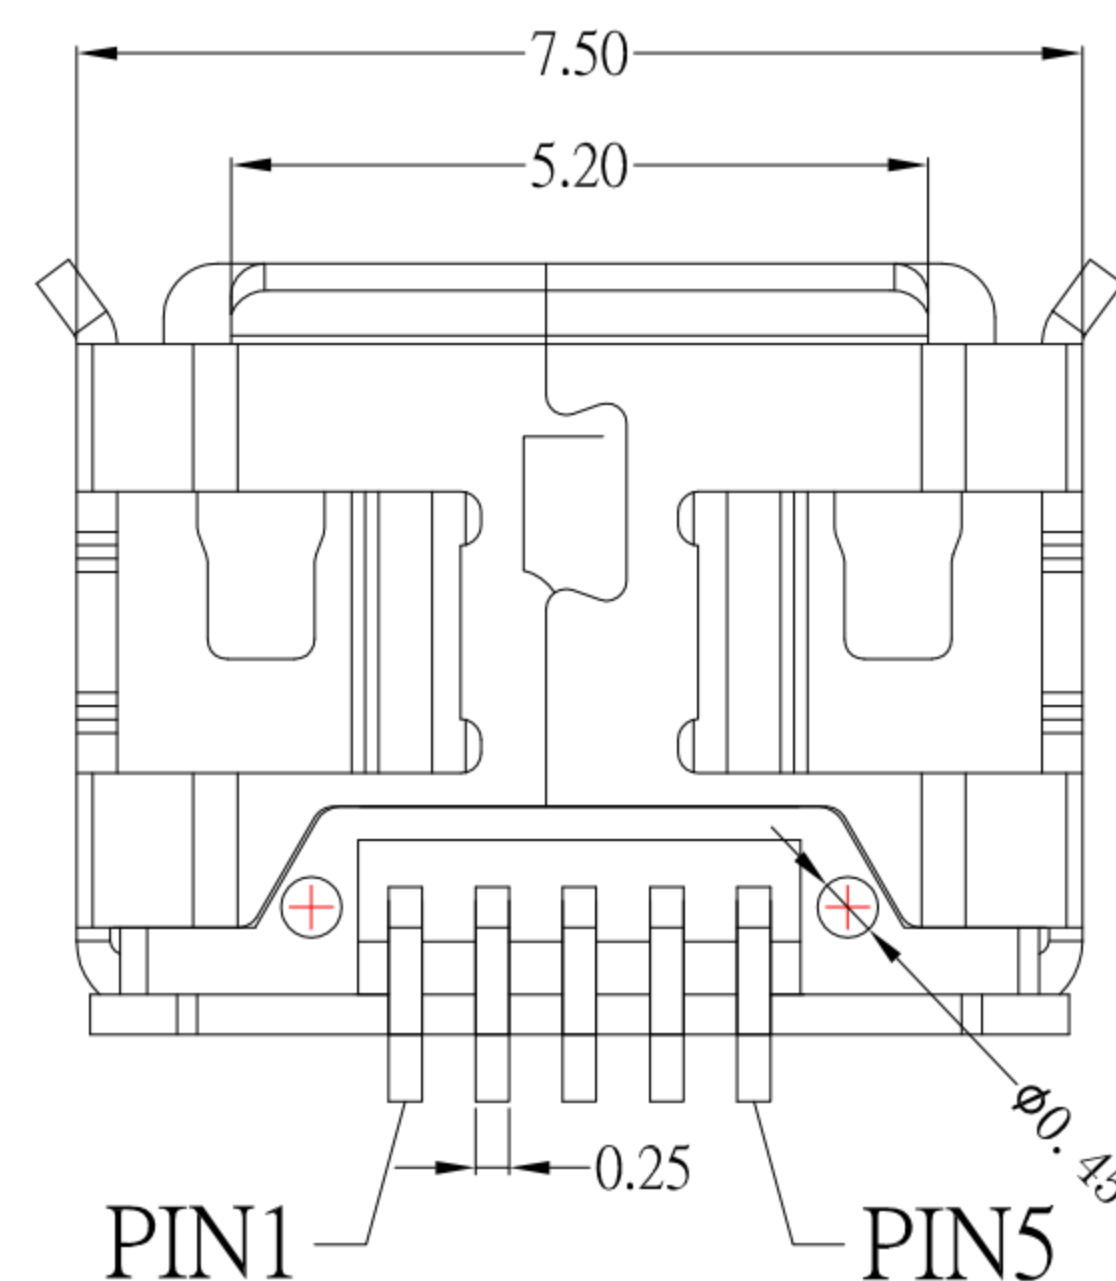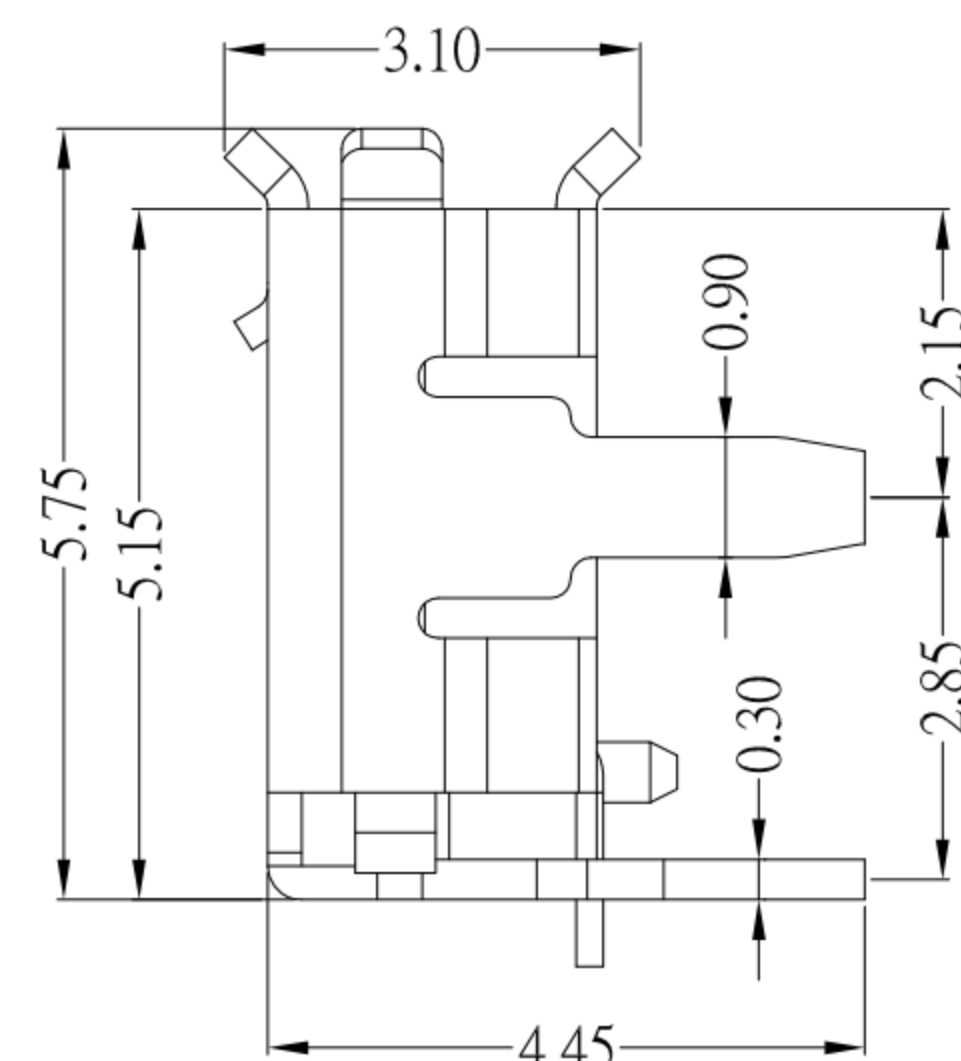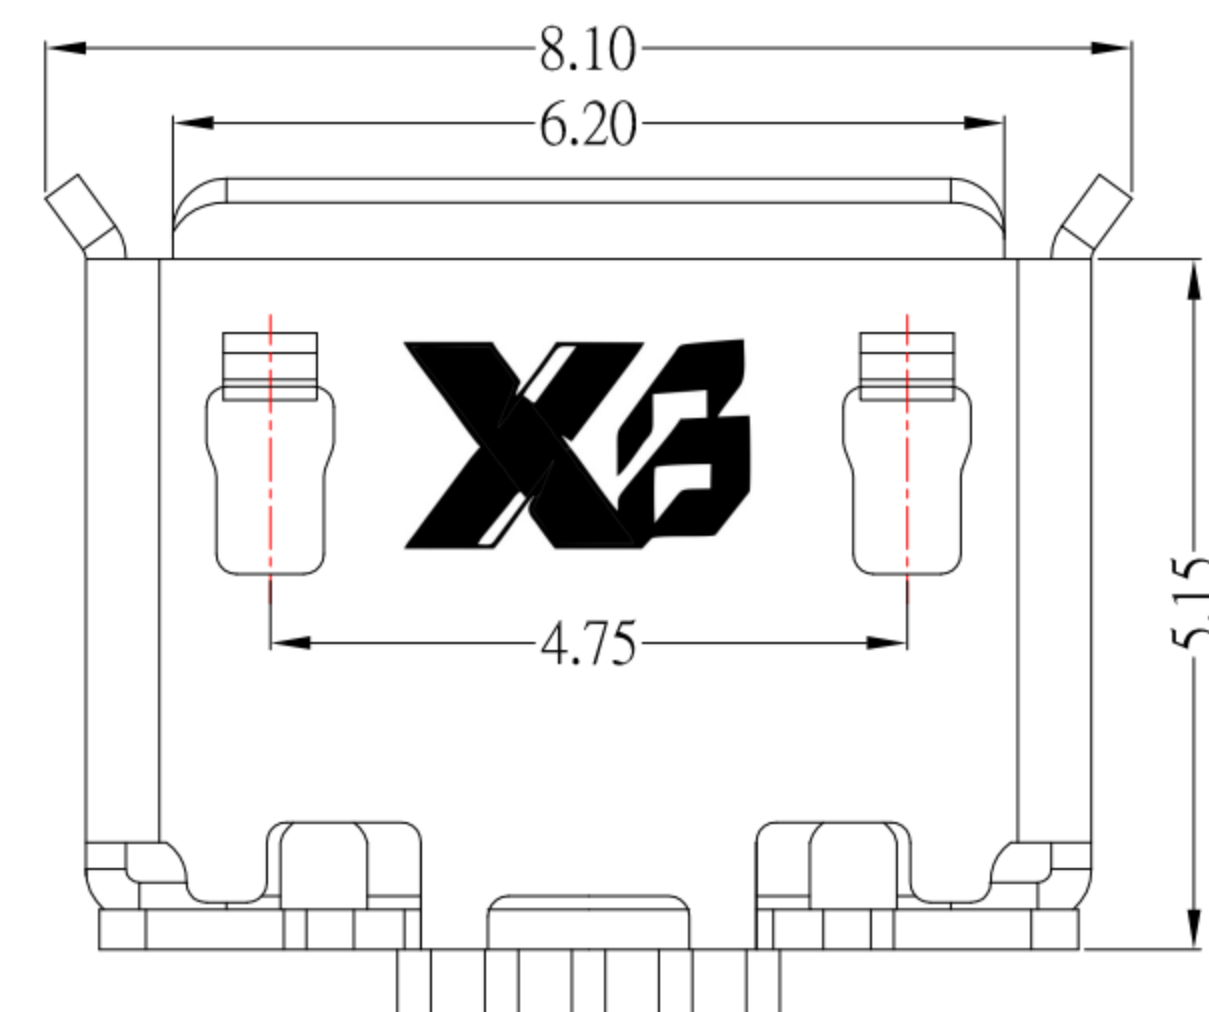

 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	$\pm 0.3^\circ$				

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	03/15/23			MODLE	MICRO USB BF CONNECTOR	
CHECKED BY:	DATE	FINISH	1 : 1	DWG NO.	MRUSB-5B-EDA-S129	SIZE
Jacky Chen	03/15/23	SCALE				A4
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	MRUSB-5B-EDA-S129	VER
Tony Kao	03/15/23					R10