

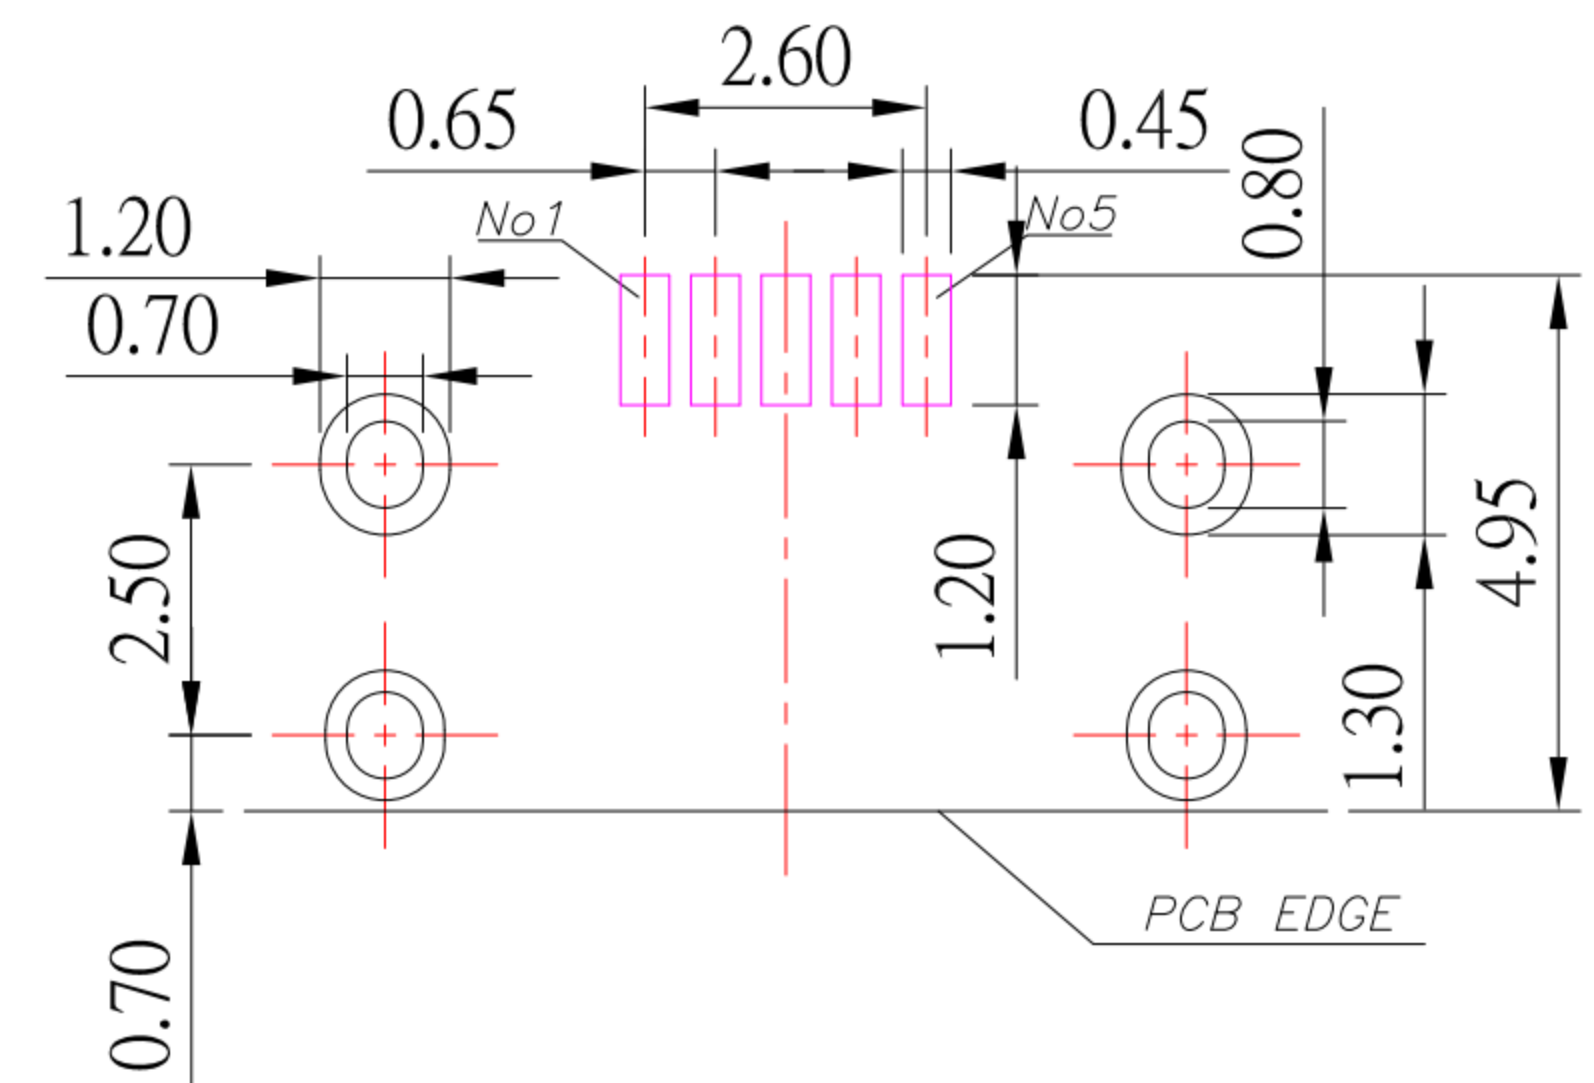
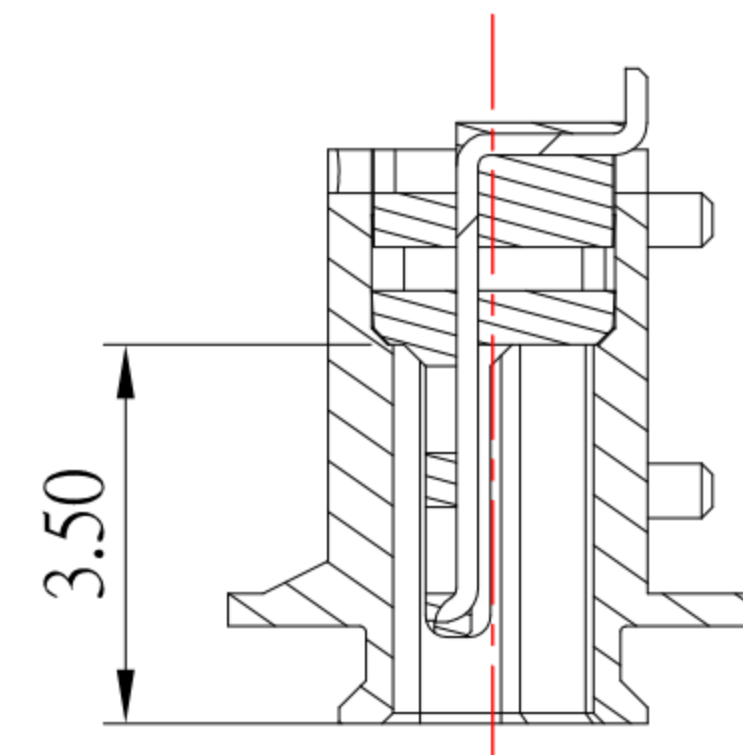


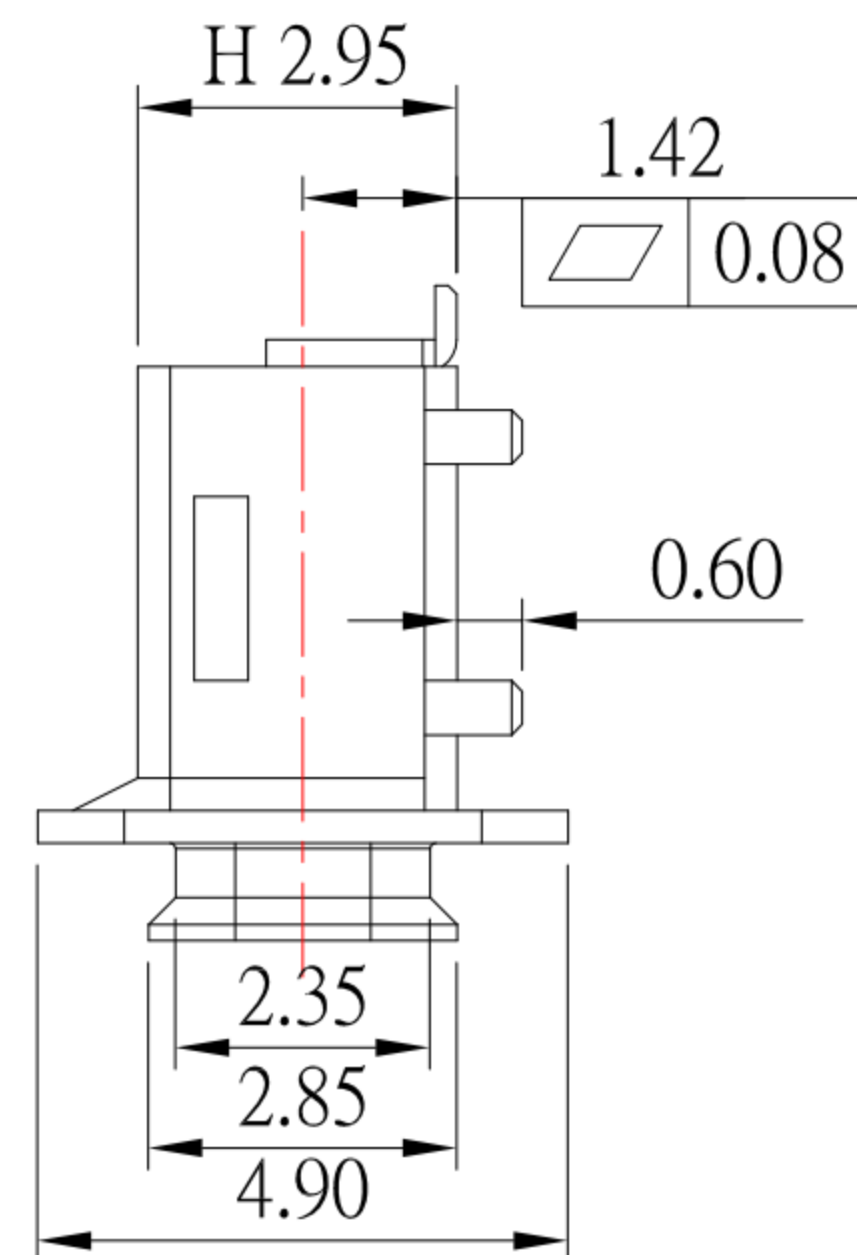

P.C.B LAYOUT MOUNTING PATTERN

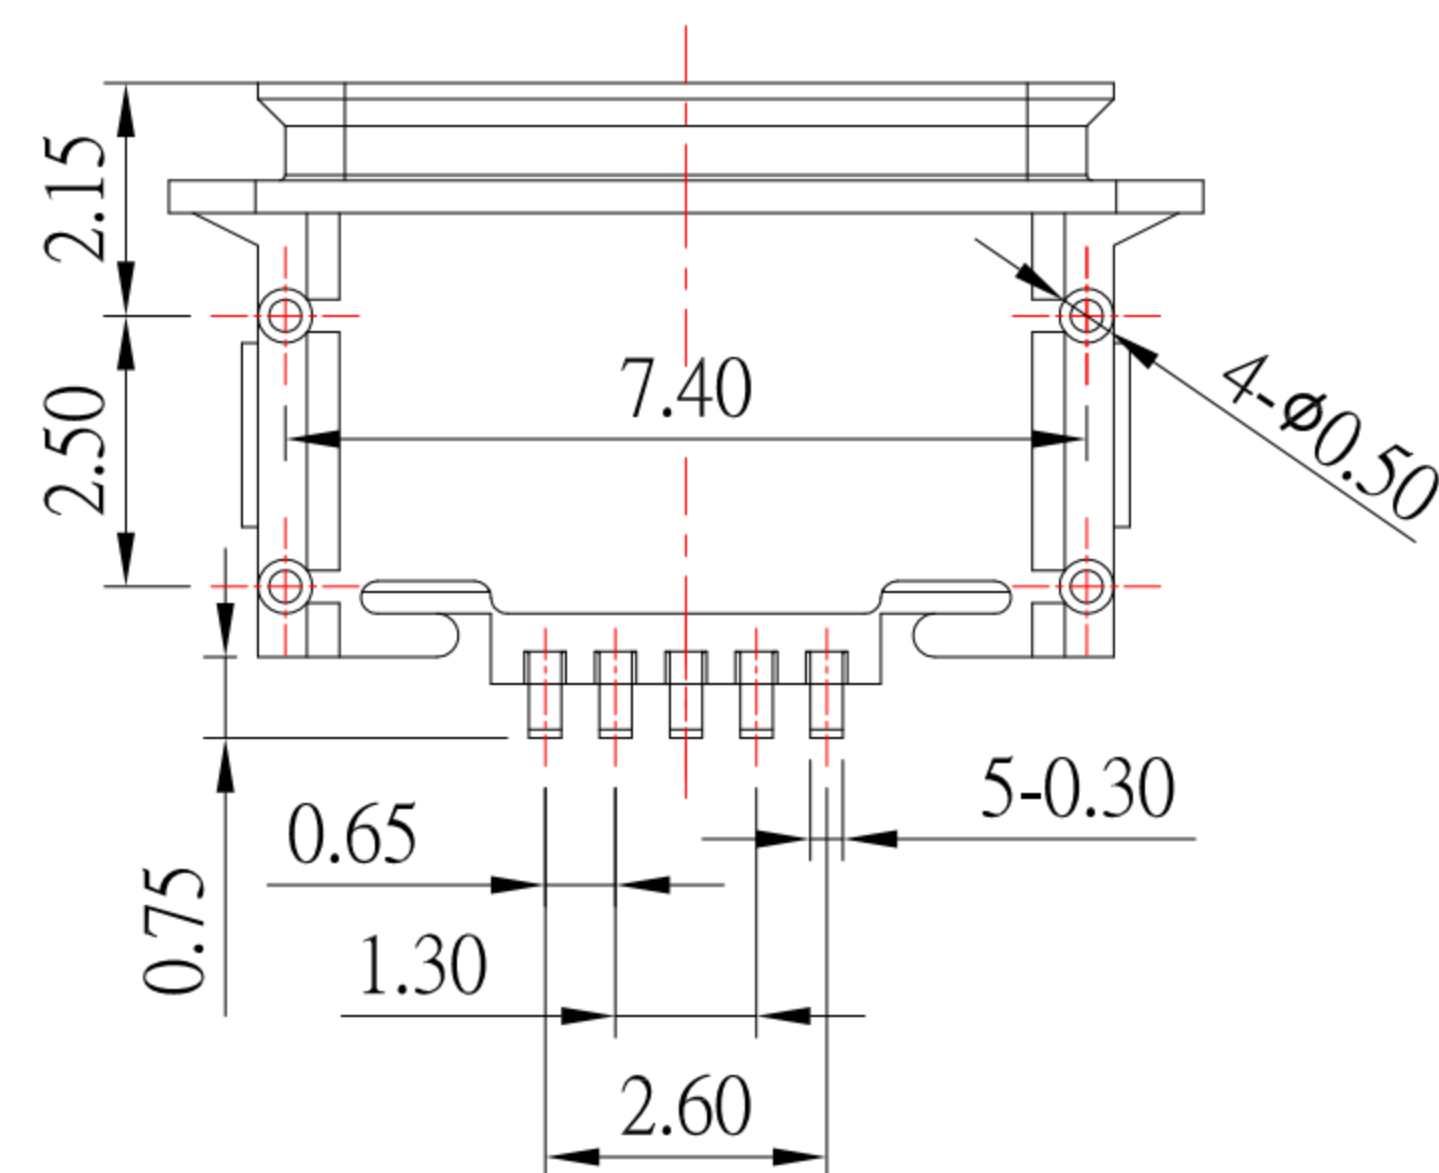

MRUSB-5B-WP10-x-S382

— 鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

NOTES:

MATERIAL:

1.1 HOUSING: HIGH-TEMP

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: SUS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 RATING: 1.8A(PIN1&5) , 0.5A(PIN2&3&4)

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 1000 MΩ MIN.

 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	± 0.3				
	Above 15 ~ 30	± 0.4				
	Above 30 ~ 50	± 0.5				
	Angle	$\pm 0.3^\circ$				

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	09/09/20					
CHECKED BY:	DATE	FINISH		MODLE	MICRO USB 5PF B TYPE H 2.95 防水型 IPX7	
Jacky Chen	09/09/20					
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	MRUSB-5B-WP10-x-S382	SIZE
		SHEET NO.	1 of 2	PART NO.	MRUSB-5B-WP10-x-S382	A4
						VER
Tony Kao	09/09/20					R3

IPX7

RoHS
Compliant

機殼面板對密封圈
為縮量0.40Min


機殼面板對密封圈為縮量0.30Min
(建議壓縮量為密封圈直徑大小40-50%)

1.3 REF

0.6



PCBA

COMPRESSION RATIO TO BE 40%-50%


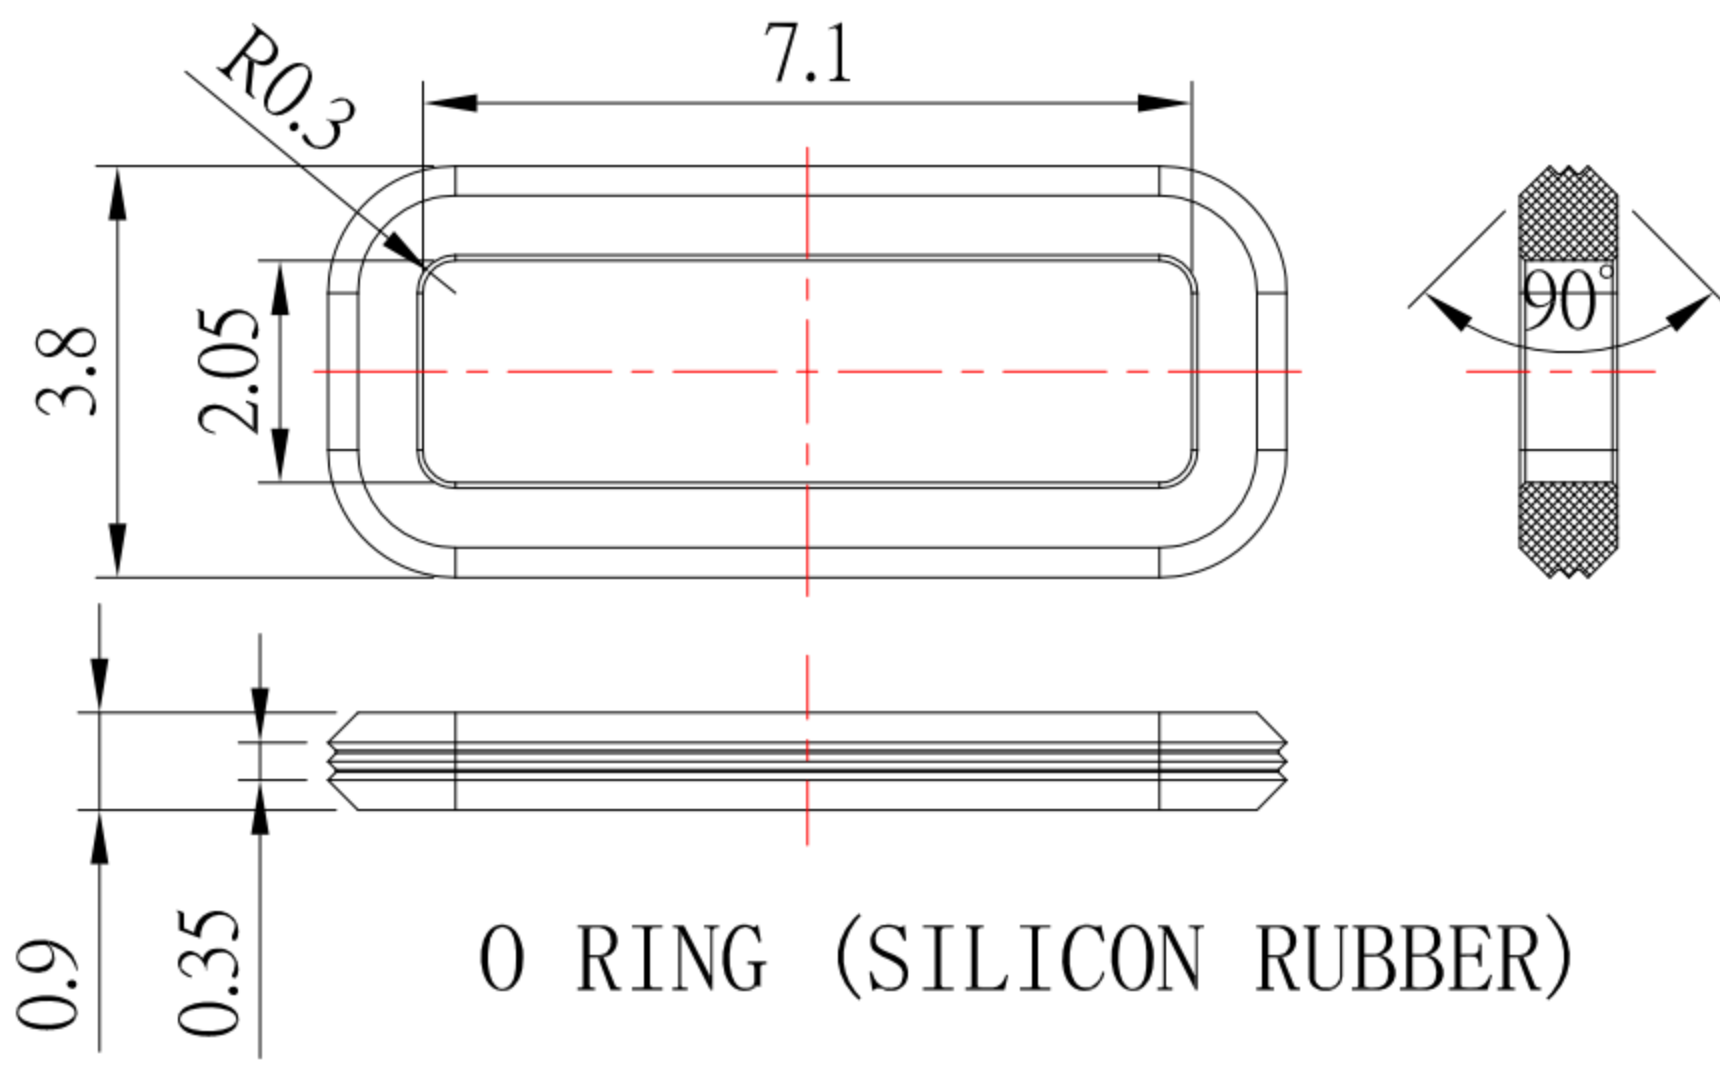


O RING (SILICON RUBBER)

P/N:PT-ORING-5-S382

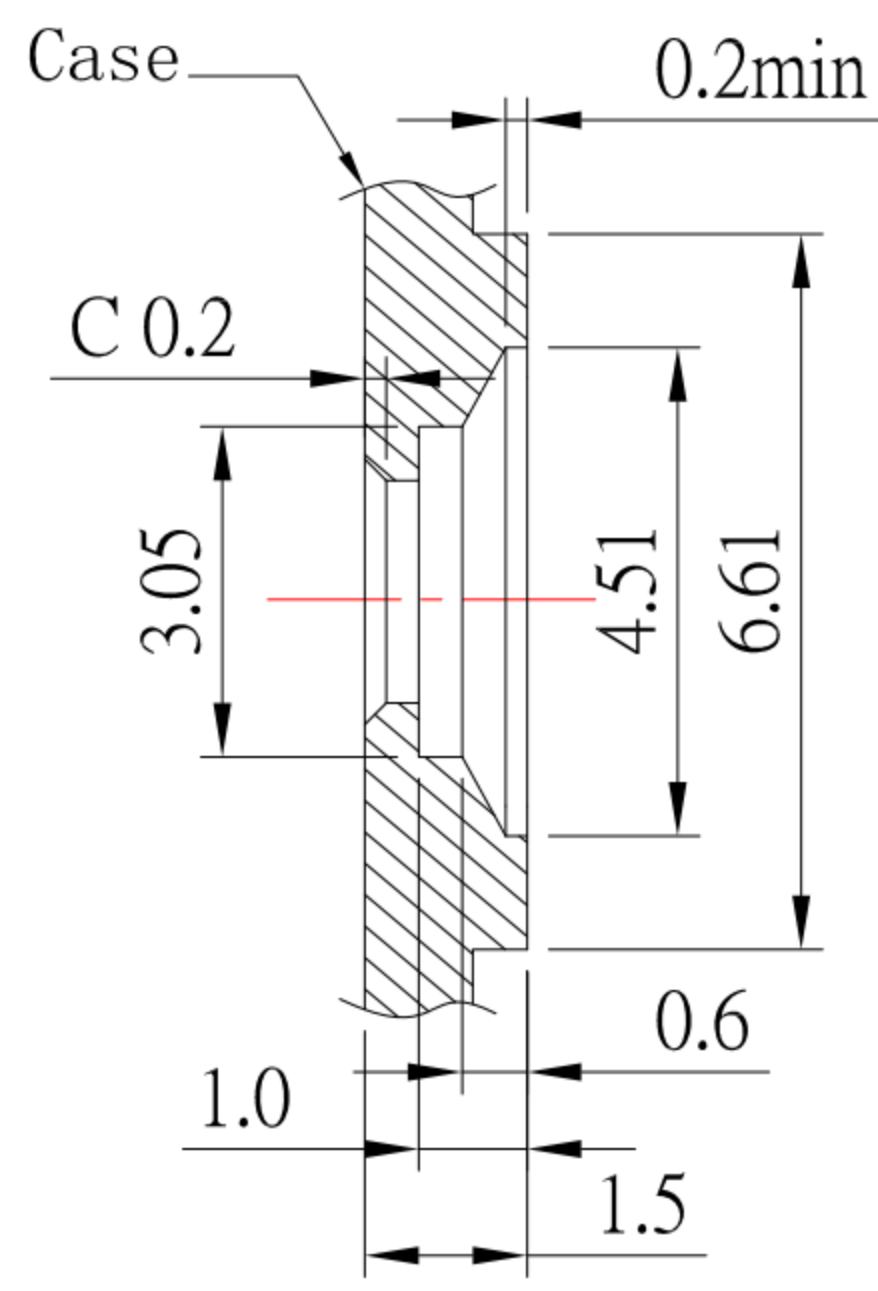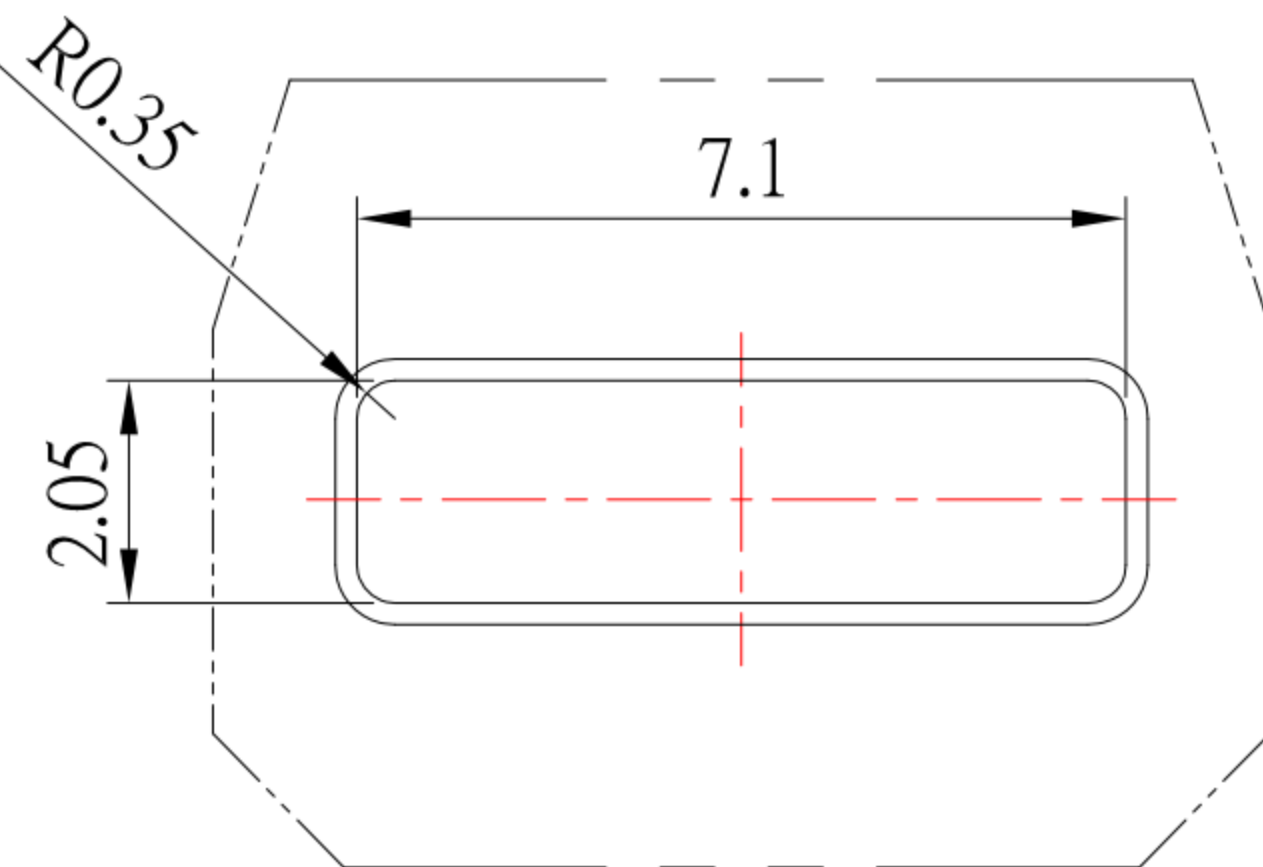

RECOMMENDED OPEN DIMENSION OF CASE

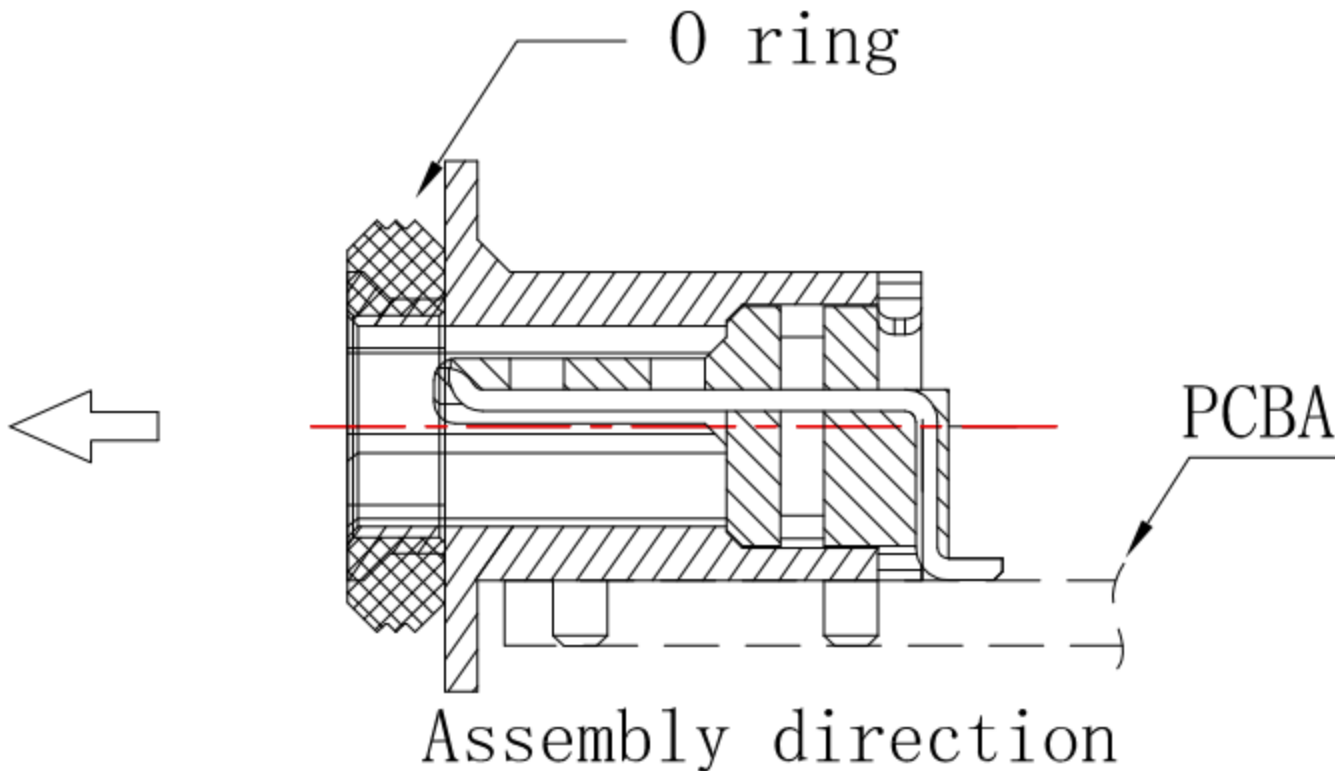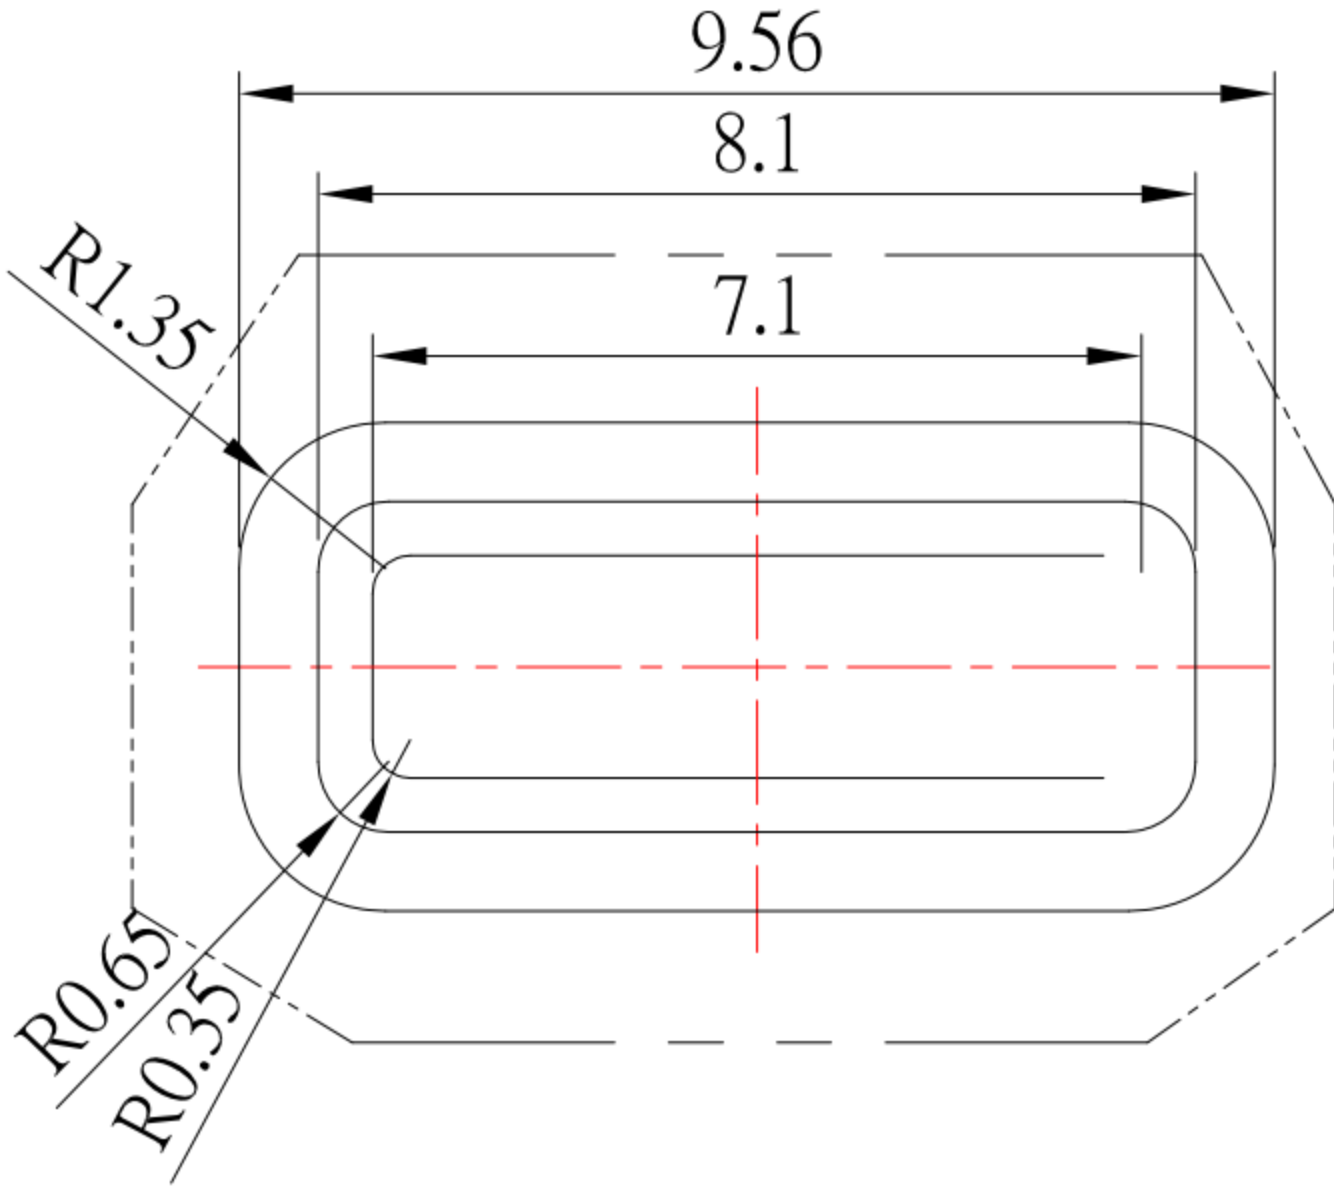

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	09/09/20			
CHECKED BY:	DATE	FINISH	MODLE	MICRO USB 5PF B TYPE H 2.95 防水型 IPX7
Jacky Chen	09/09/20			
APPROVED BY:	DATE	SCALE	DWG NO.	MRUSB-5B-WP10-x-S382
Tony Kao	09/09/20	1 : 1		
		SHEET NO.	PART NO.	MRUSB-5B-WP10-x-S382
				SIZE A4
				VER R3