








REV.	DESCRIPTION	DATE
2	MODIFY DRAWING	Mar. 19, 2019
3	ADD PACKING	Apr. 19, 2019
4	MODIFY DRAWING	Apr. 30, 2019

MATERIALS

- HOUSING : HI.-TEMP.PLASTIC(UL 94V-0), BLACK.
- TERMINAL : COPPER ALLOY,
PLATING : GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS.
- SHELL : COPPER ALLOY,
PLATING : NICKEL PLATED OVERALL.
- EMI SHIELD : STEEL.

SPECIFICATION

- CURRENT RATING : 0.5 A. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 100MΩ MIN.AT 500V DC.
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- INSERTION FORCE : 4.5Kgf MAX.
- WITHDRAWING FORCE : 1Kgf ~ 4Kgf.

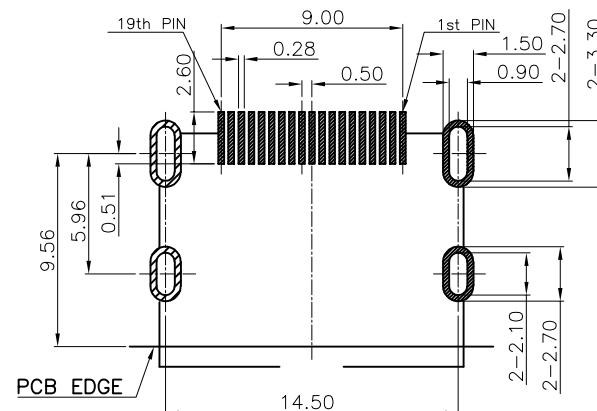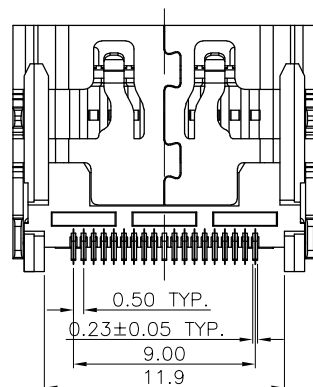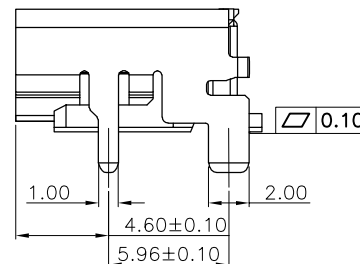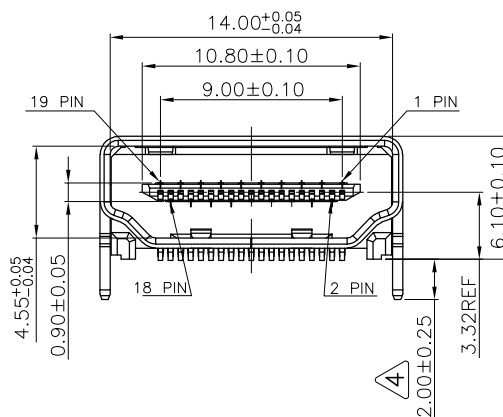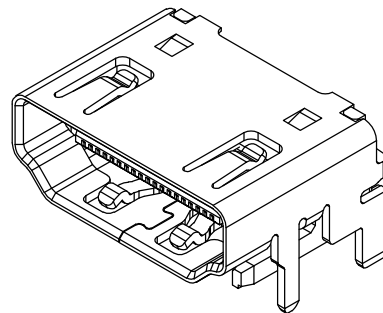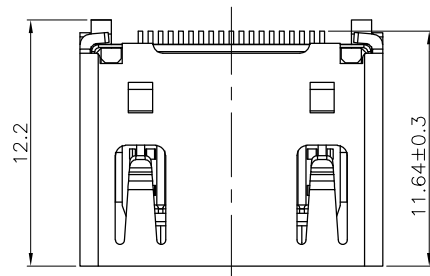

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05
TOP VIEW

TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
APP'D <i>Hony</i>		NAME	
PRODUCT SPEC.		HDMI A 2.1 TYPE FEMALE	
UNITS : mm		DRAW NO.	
SCALE NONE	SIZE A7	SHEET 1 OF 2	REV. 4
XB-R369FA19-XN033D-H			