



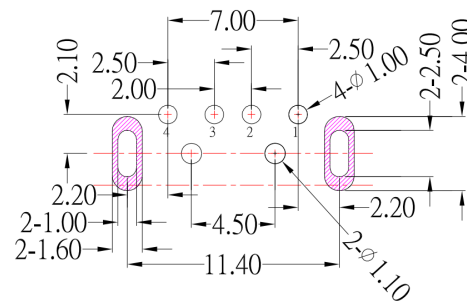





SUA-111H-2.0-x-S175

Color :

W:White
B:Black

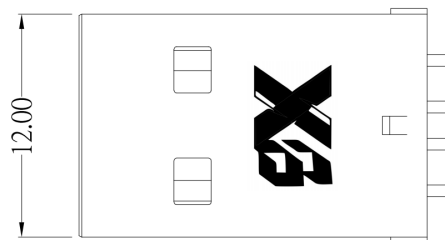

P.C.B LAYOUT MOUNTING PATTERN

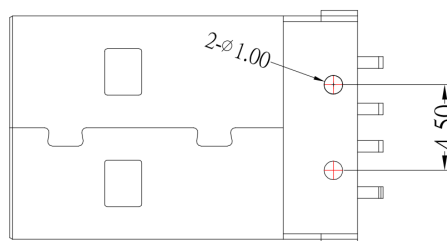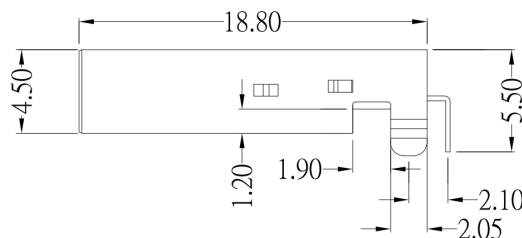

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 30 milliohms Max
- 4.Dielectric Withstanding Voltage:
500 V AC AT Sec Level
- 5.Insulation Resistance: 1,000 MEGA ohms Min

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force: 3.5 kgf (Max)
Unmate force: 1.02 kgf (Min)
- 2.Terminal Retention: 1.2 kgf (Min)

Material:

- 1.Housing: PBT
- 2.Contact: BRASS
- 3.Shell: SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

7	新增PCB LAYOUT尺寸	Jack	071421
6	更新樣式	Lan	050819
5	新增PIN編號	Jack	110717
4	新增尺寸	Jack	050217
3	新增PCB LAYOUT尺寸	Jack	041117
2	更新材質	Jack	120516
1	更新材質及鍍層	Jack	081913
ITEM NO.	DESCRIPTION	DRAWN	DATE

XBS 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3	3RD. ANGEL'S	UNITS	MM
-------------------------------------	---	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	07/14/21			
CHECKED BY:	DATE	FINISH	MODLE	USB AM 90 度 DIP
Jacky Chen	07/14/21			
APPROVED BY:	DATE	SCALE	DWG NO.	SUA-111H-2.0-x-S175
Tony Kao	07/14/21	1 : 1		
		SHEET NO.	PART NO.	SUA-111H-2.0-x-S175
				SIZE A4 VER R7