
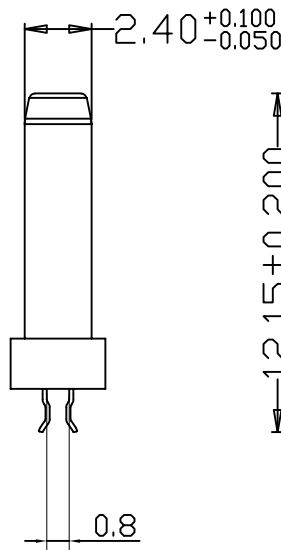
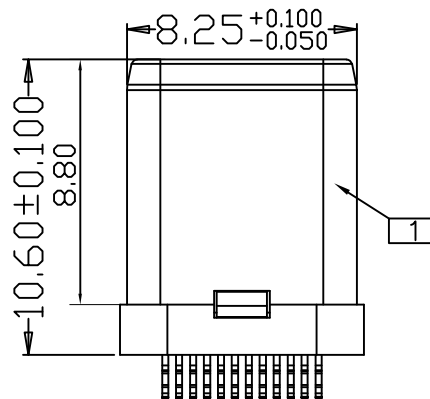

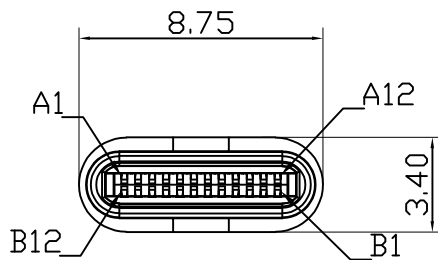


REMARKS(备注):

1. CONTACT INSERTION AND WITHDRAW FORCE(插拔力)

1.1.Insertion force(插入力): 5N ~ 20N Max;

1.2.Withdrawal force(拔出力): 8N ~ 20N;

1.3.Durability(耐久性): 10000Cycles.

2. ELECTRIC PROPERTY(电气性能):

2.1.Contact current rating(额定点流): 3A ;

2.2.Dielectric Strength(介电强度): 100V AC (RMS);

2.3. Insulation Resistance(绝缘电阻): 100 megaohms(兆欧) min;

2.4. Contact resistance(接触电阻):

40mOhms Max, FOR VBUS, GND AND OTHER CONTACT,

50mOhms Max, AFTER ENVIRONMENT TEST,

3. AMBIENT TEMPERATURE(温度环境):

3.1.Operating temperature(制造温度): -55° C to +85° C.

针脚定义:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
GND	RX1+	RX1-	VBUS	SUB2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

3	端子	C5191	镍50u"Min 金1u"Min 锡100u"Min	
2	塑胶	LCP	9芯环保喷锡	
1	胶壳	PA66	黑色	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

	绘图类型 Drawing type	产品工程图			产品料号 Part NO.	XB-TYPE-C-PLUG-24P-T	
	产品名称 Product Name	USB 3.1 TYPE-C 24PIN全塑公头 夹板0.8 圆角 外露8.8mm			图号 Drawing NO.	-	
	制图 Drawing	审核 Auditing	批准 Confirm	图纸比例 Drawing Scale	FIT	A4	共1页 第1页
	公差尺寸表 Tolerance	PENG, GAO	DONG, PANG	FEI, LONG, HE			
X. ±0.50 X* ±2*		日期/Date		日期/Date			
.X ±0.30 X* ±1*				日期/Date			
.XX ±0.10 XX* ±0.5*							
.XXX ±0.05							

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.